

BEST AVAILABLE



(12) UK Patent (19) GB (11) 2 399 119 (13) B

(45) Date of publication: 11.05.2005

(54) Title of the invention: Forming a wellbore casing

(51) Int Cl⁷: E21B 43/10 33/14

(21) Application No: 0411698.4

(22) Date of Filing: 17.09.2001

Date Lodged: 25.05.2004

(30) Priority Data:
(31) 60233638 (32) 18.09.2000 (33) US

(62) Divided from Application No
0303220.8 under Section 15(4) of the Patents
Act 1977

(43) Date A Publication: 08.09.2004

(52) UK CL (Edition X):
E1F FJT FLA

(56) Documents Cited:
None

(58) Field of Search:
As for published application 2399119 A viz:
Other: U.S.
166/277,382,177.4,206,207,242.2
updated as appropriate

(72) Inventor(s):

David Paul Brisco
Edwin Arnold Zwald Jr
Chan Daigle
Gregory M Noel
William J Dean
Andrei Gregory Filippov
Ronald D Nida
Robert Lance Cook
Lev Ring
Kevin K Wadell
William Rusty Stephenson
Rune T Gusevik

(73) Proprietor(s):

Shell Internationale Research
Maatschappij B.V.
(Incorporated in the Netherlands)
Department IP/43 Carel Van Bylandtlaan
30, 2596 HR The Hague, Netherlands

(74) Agent and/or Address for Service:


Haseltine Lake & Co
Redcliff Quay, 120 Redcliff Street,
BRISTOL, BS1 6HU, United Kingdom

BEST AVAILABLE

BEST AVAILABLE COPY

28 99119

1/100

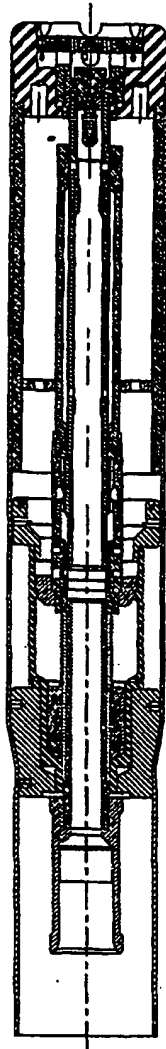

10

Fig. 1

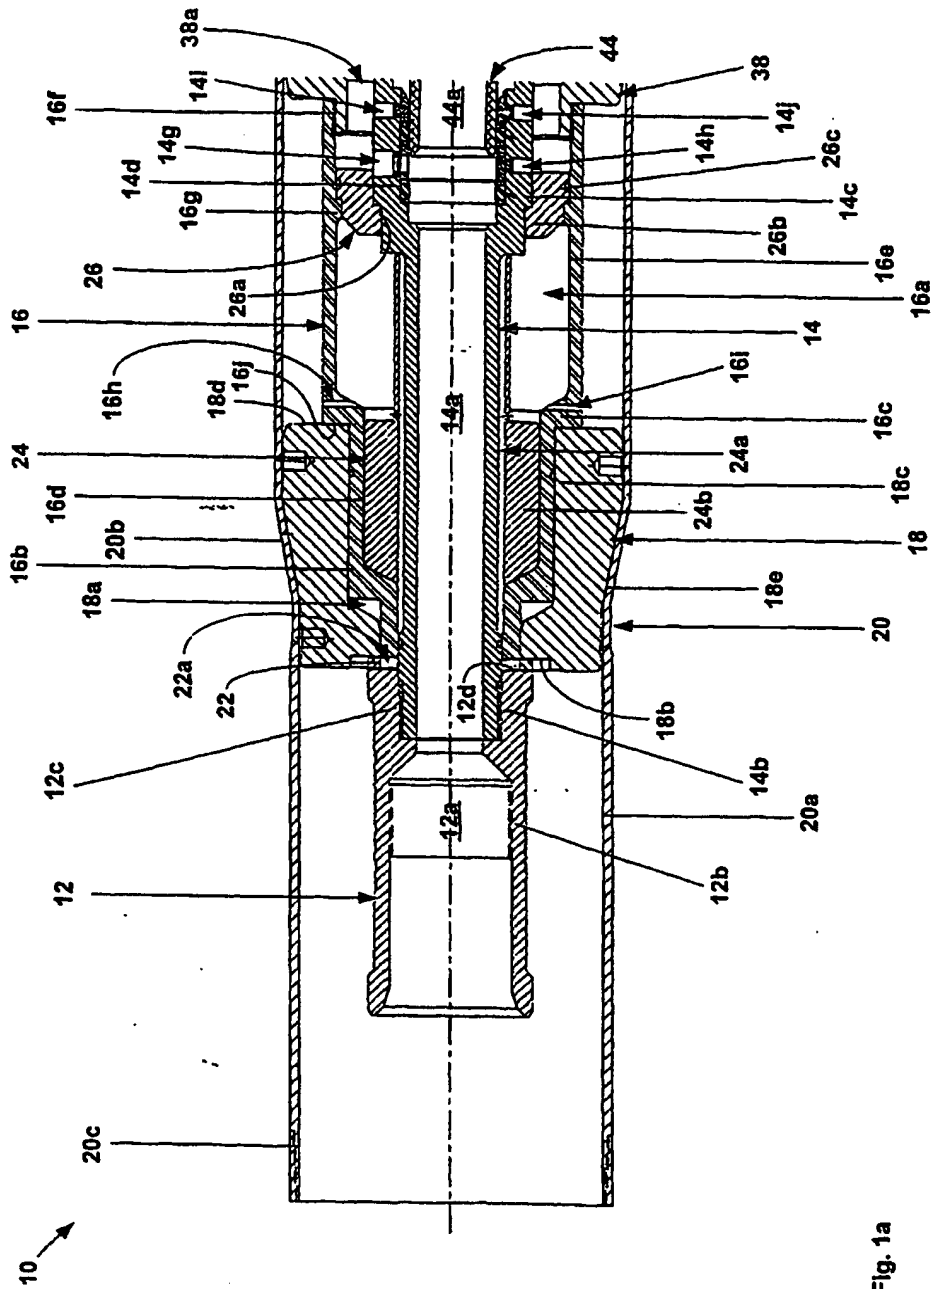


Fig. 1a

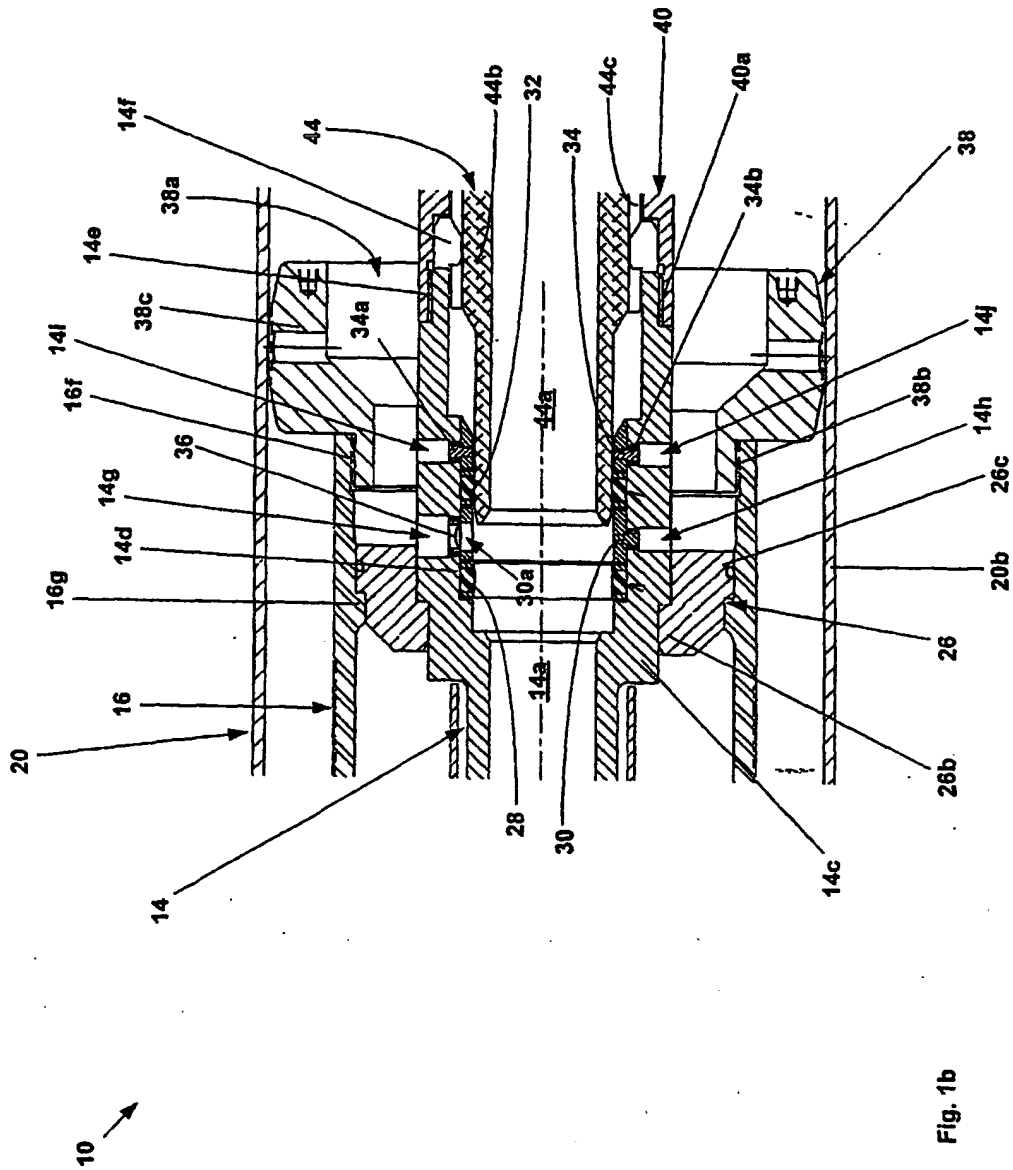


Fig. 1b

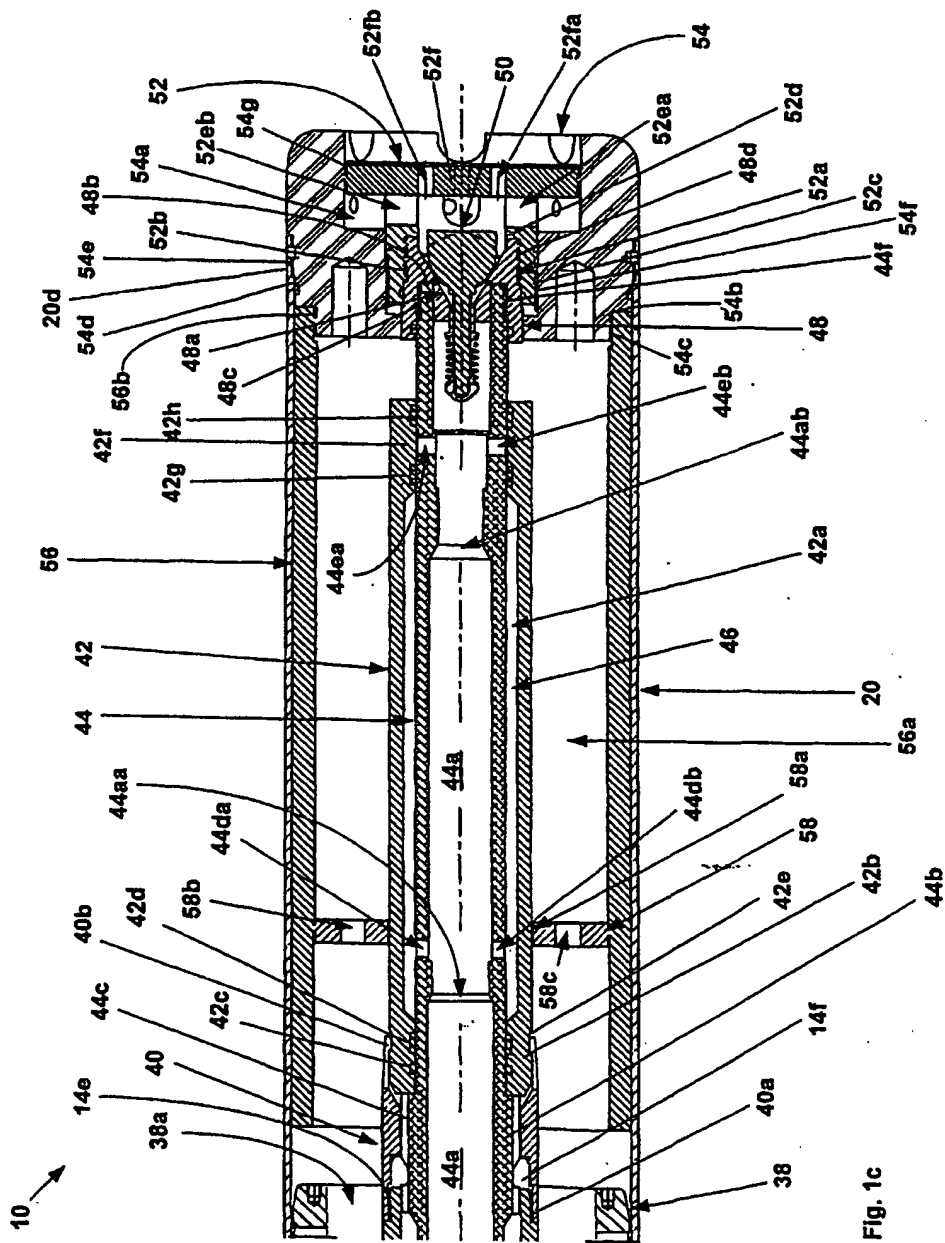


Fig. 1c

200

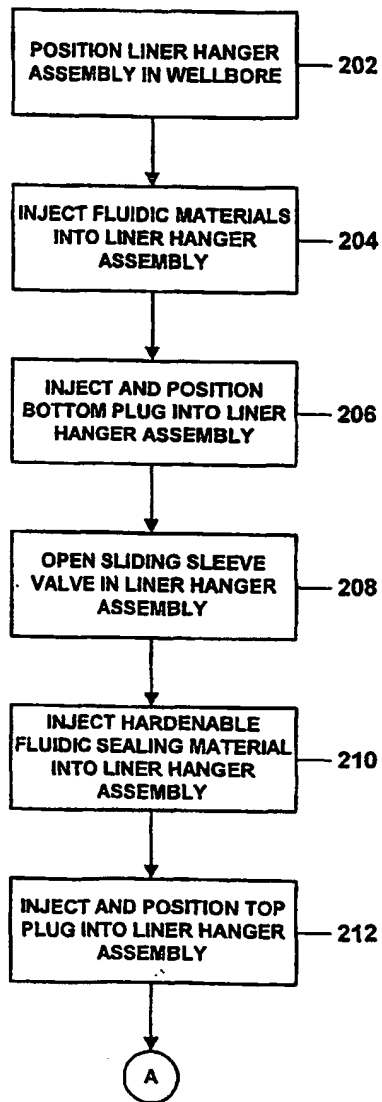


Fig. 2a

200


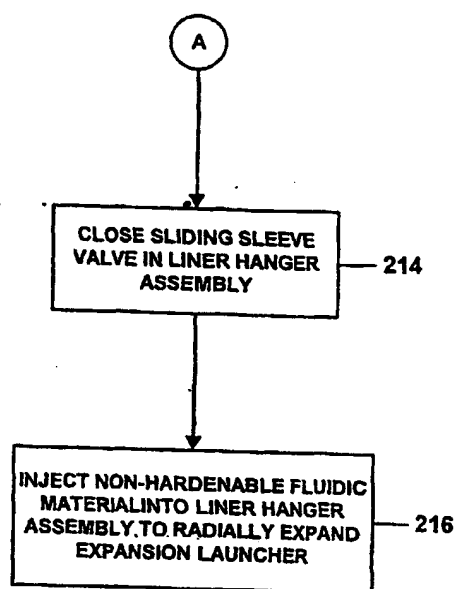


Fig. 2b

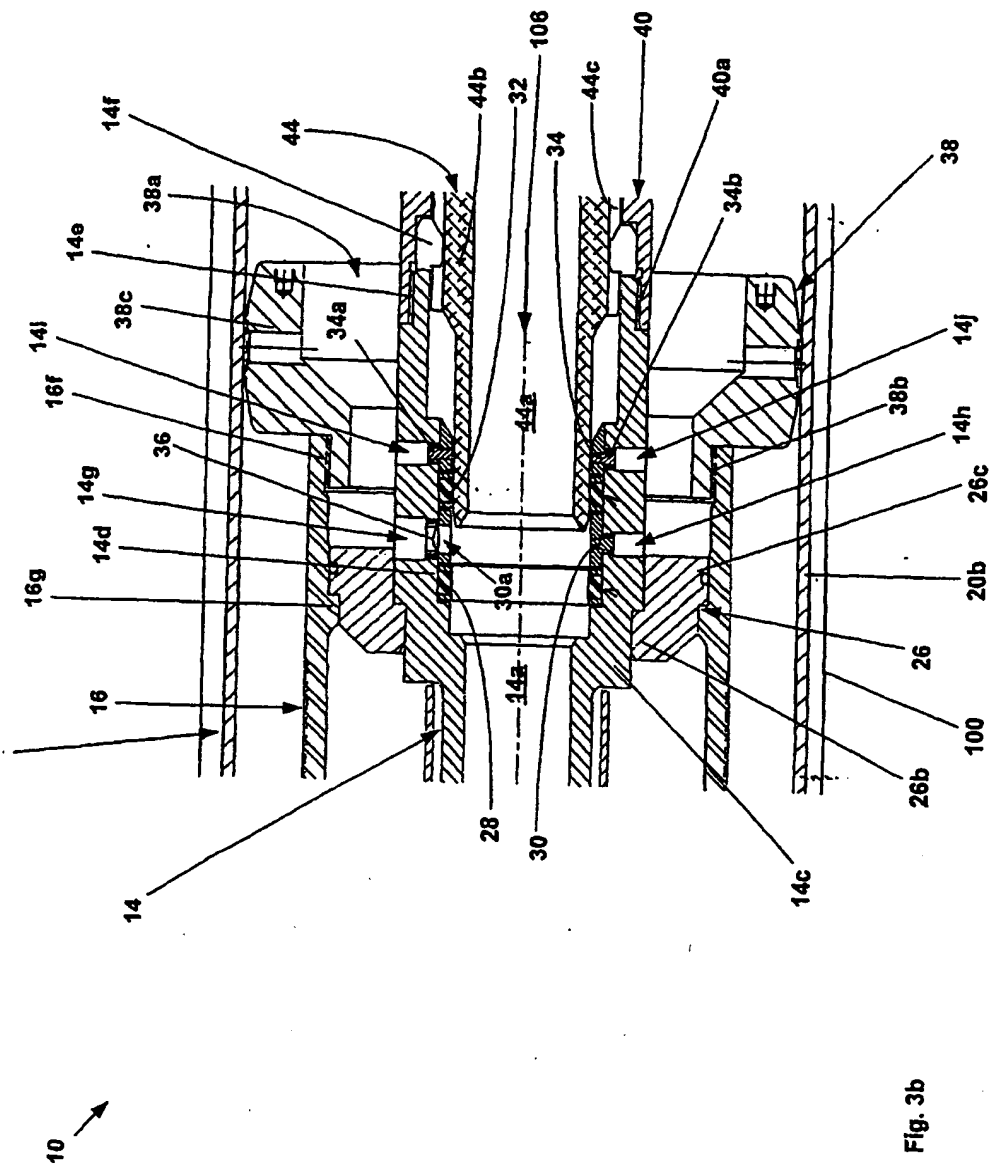

100



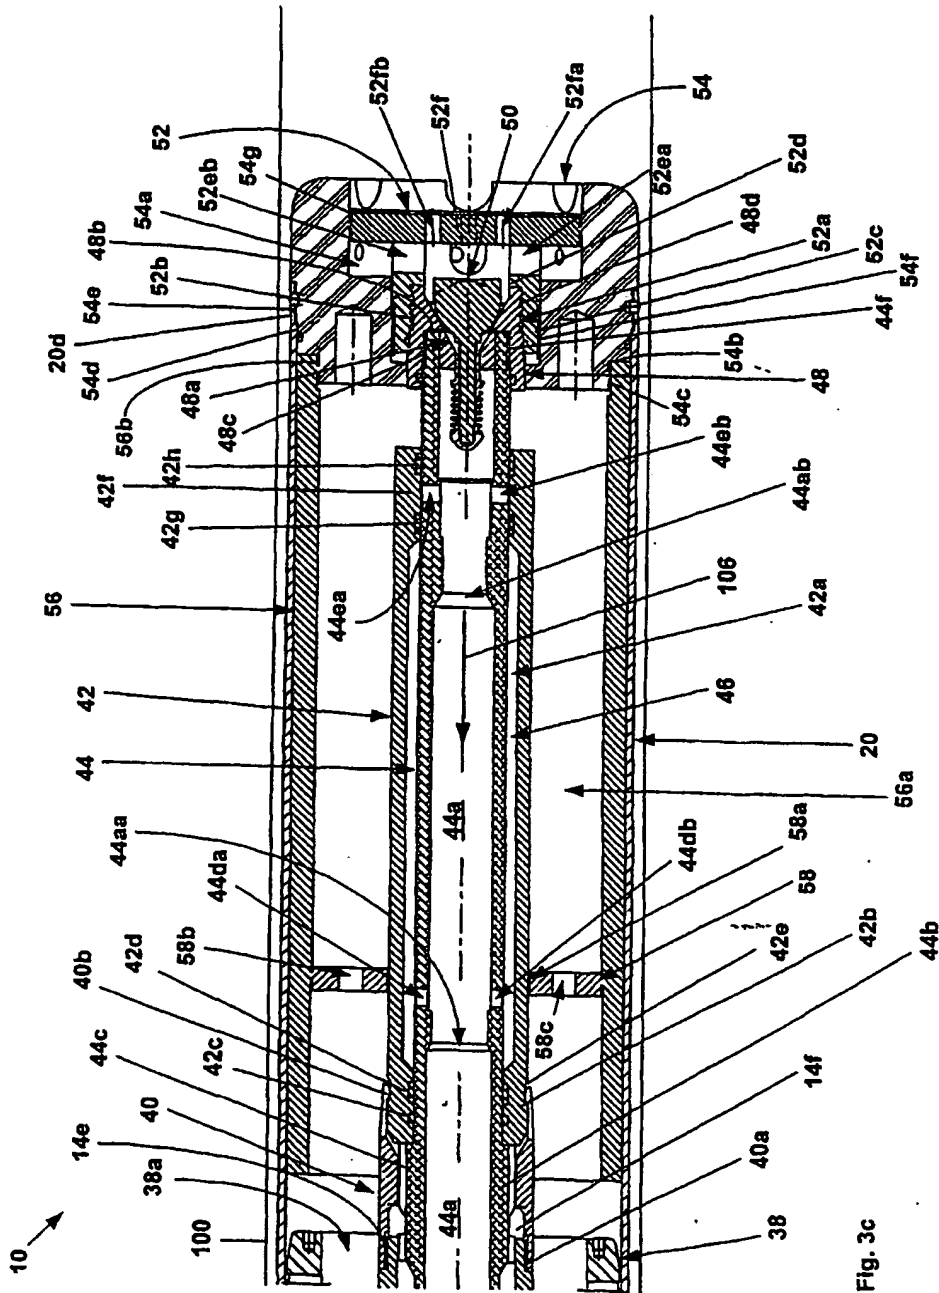


Fig. 3c

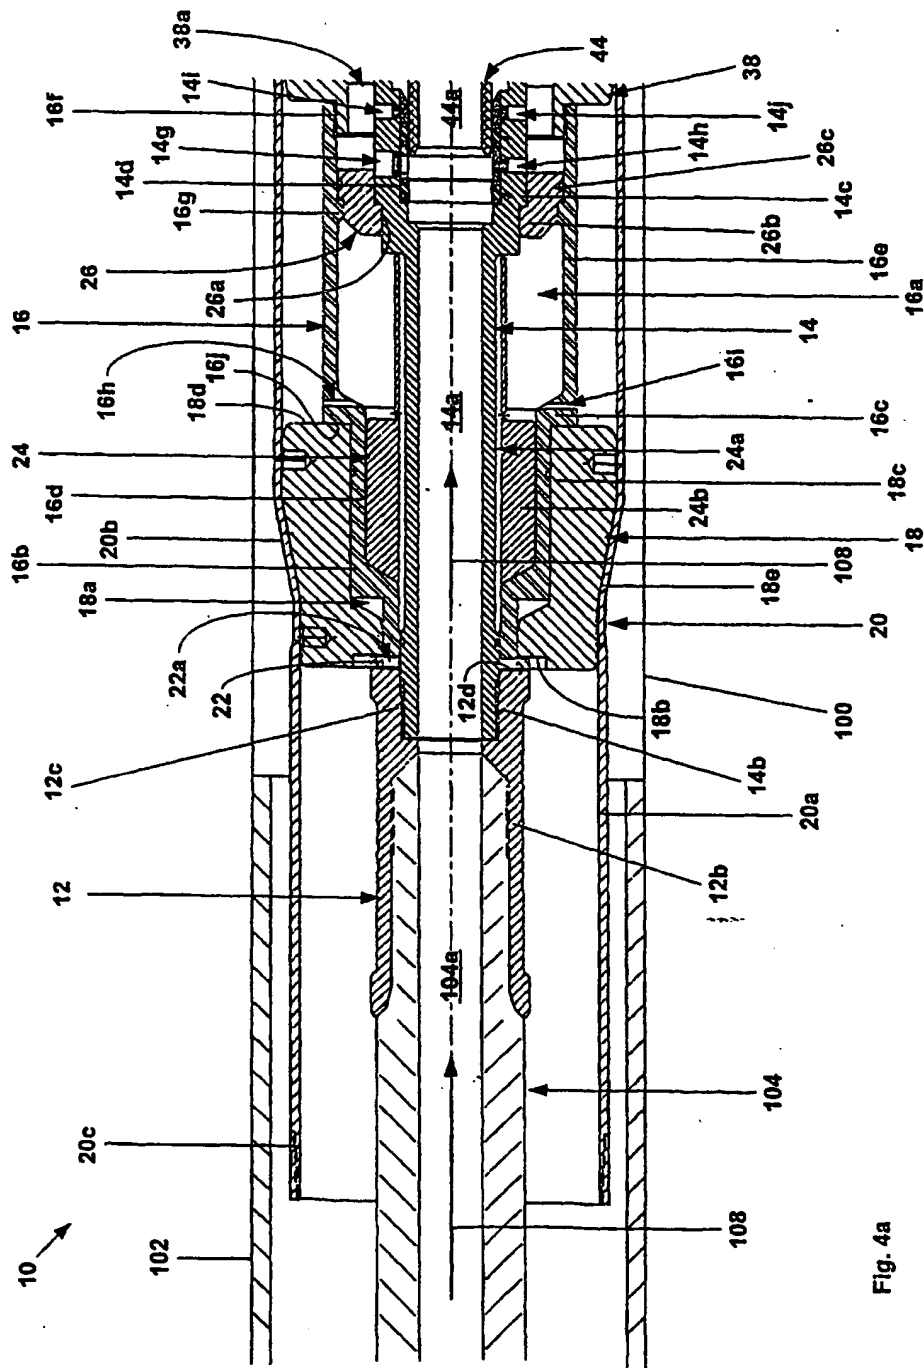


Fig. 4a

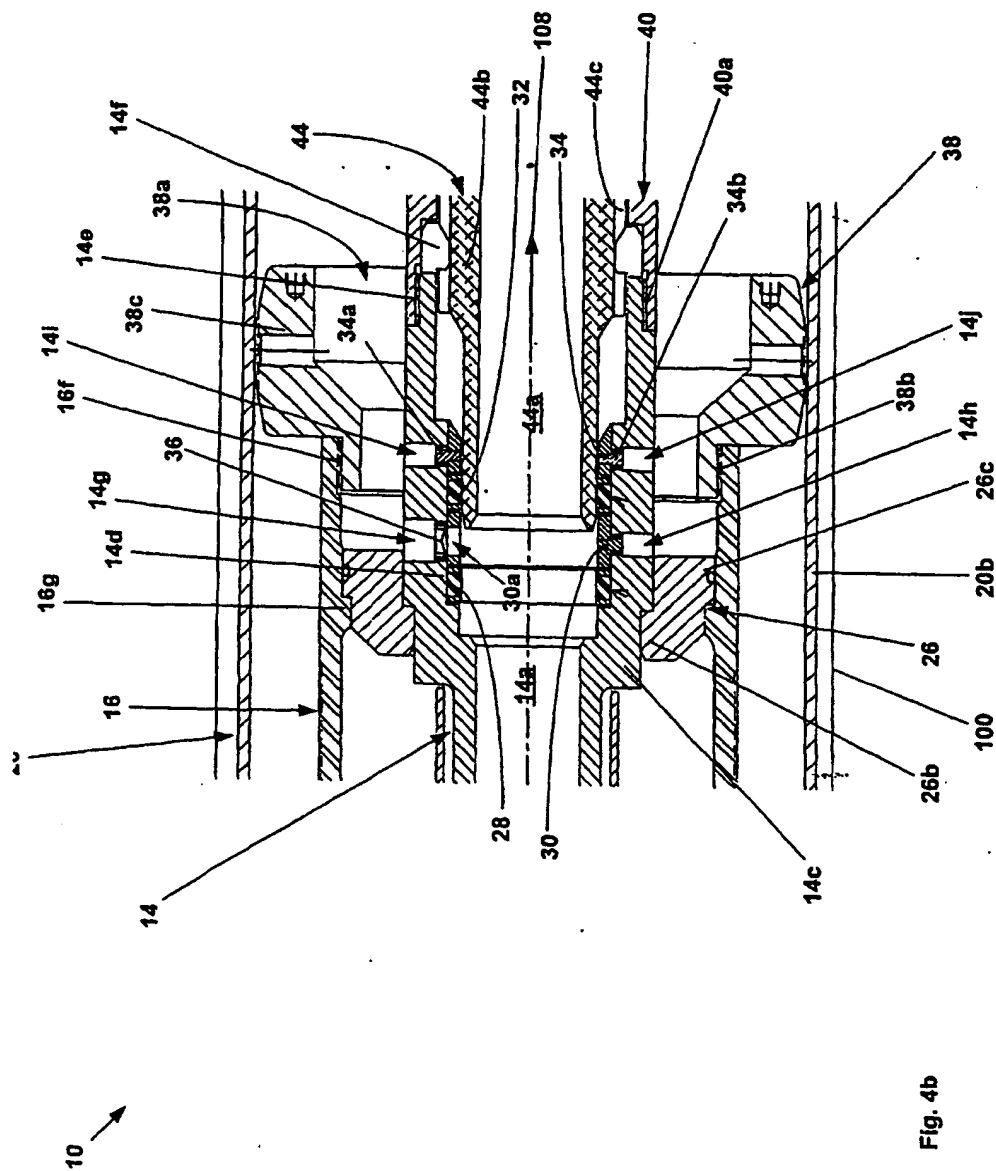


Fig. 4b

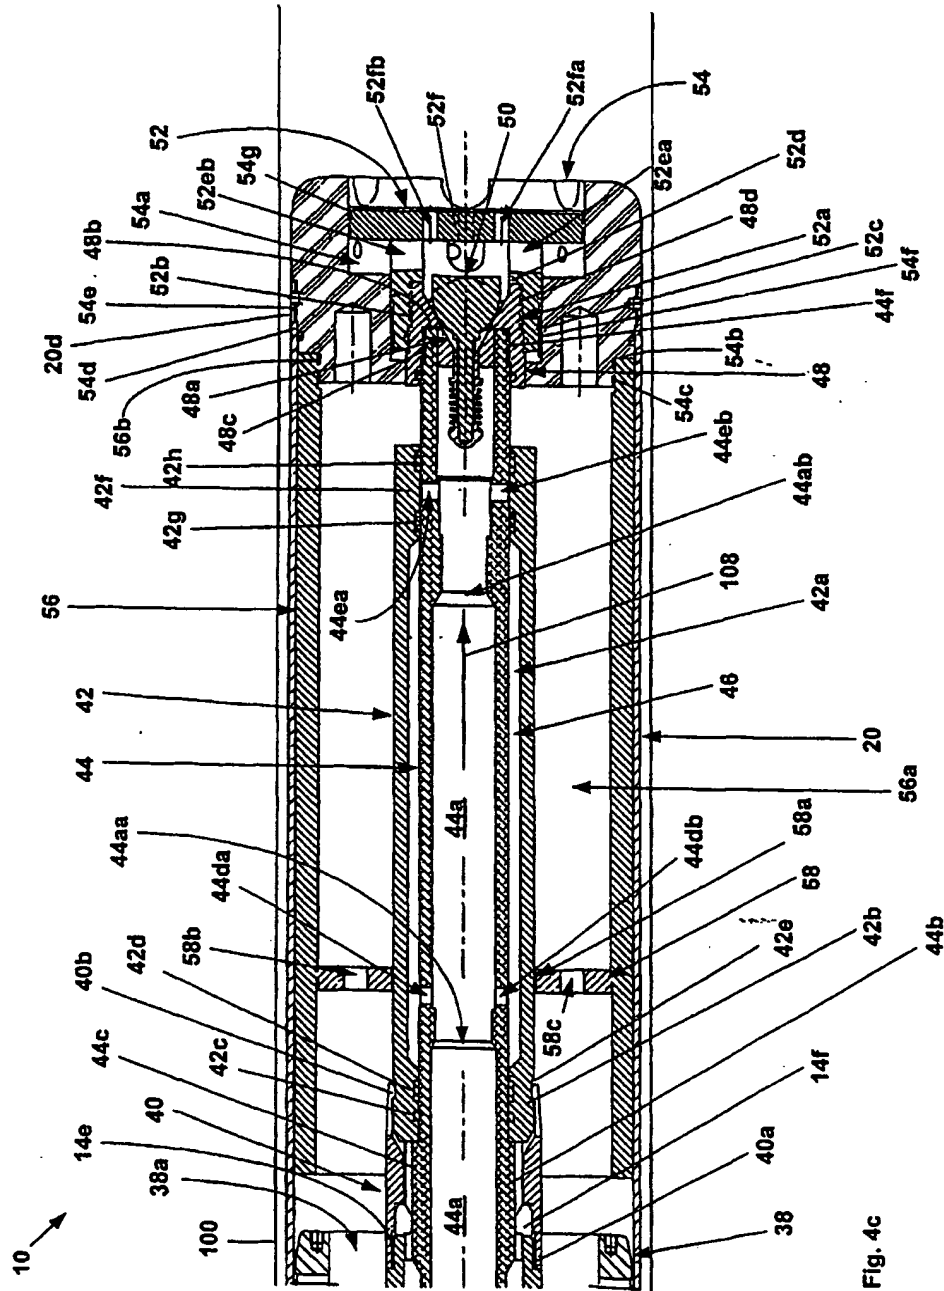
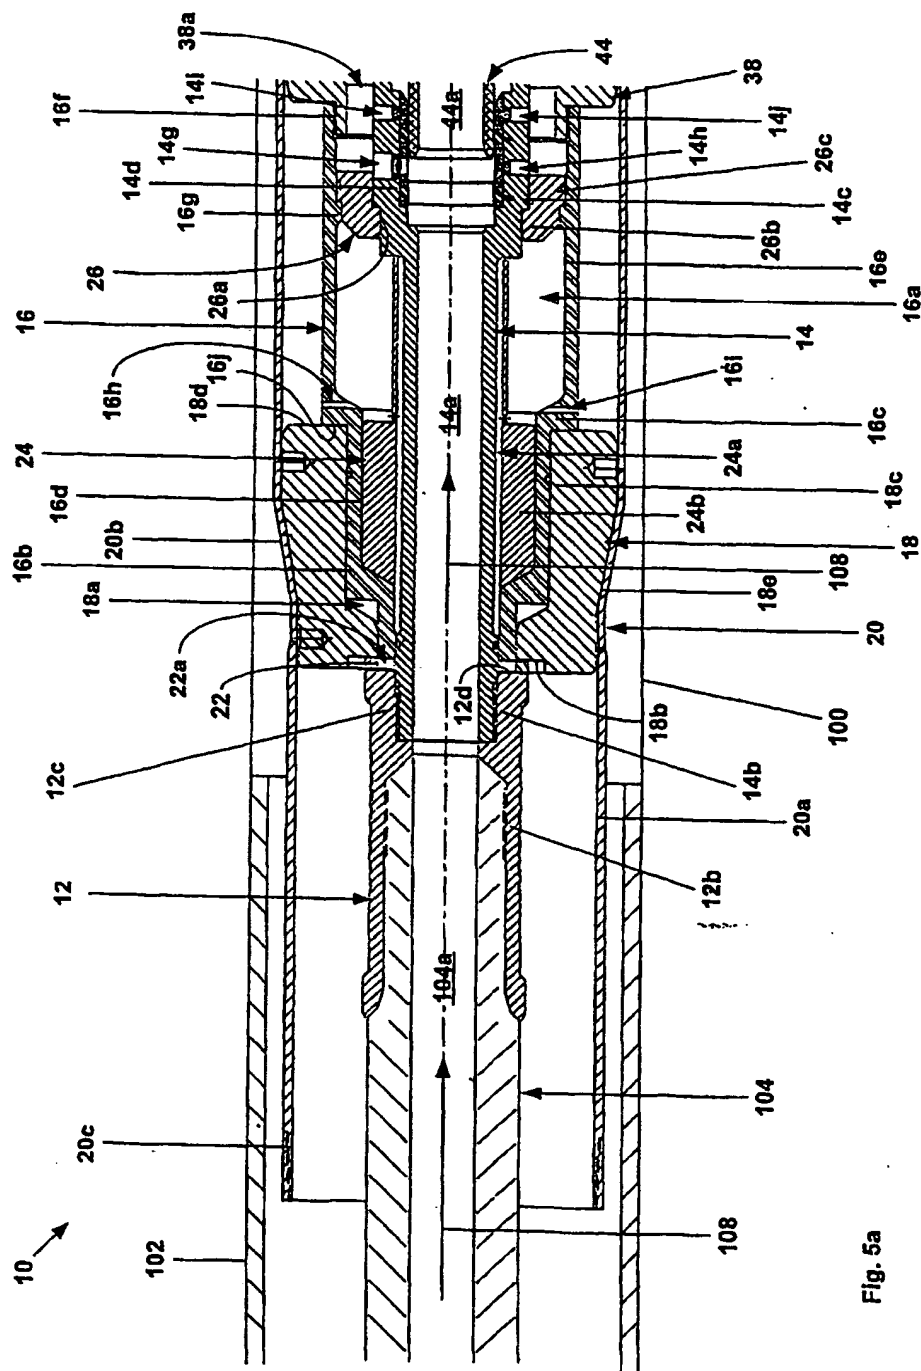


Fig. 4c



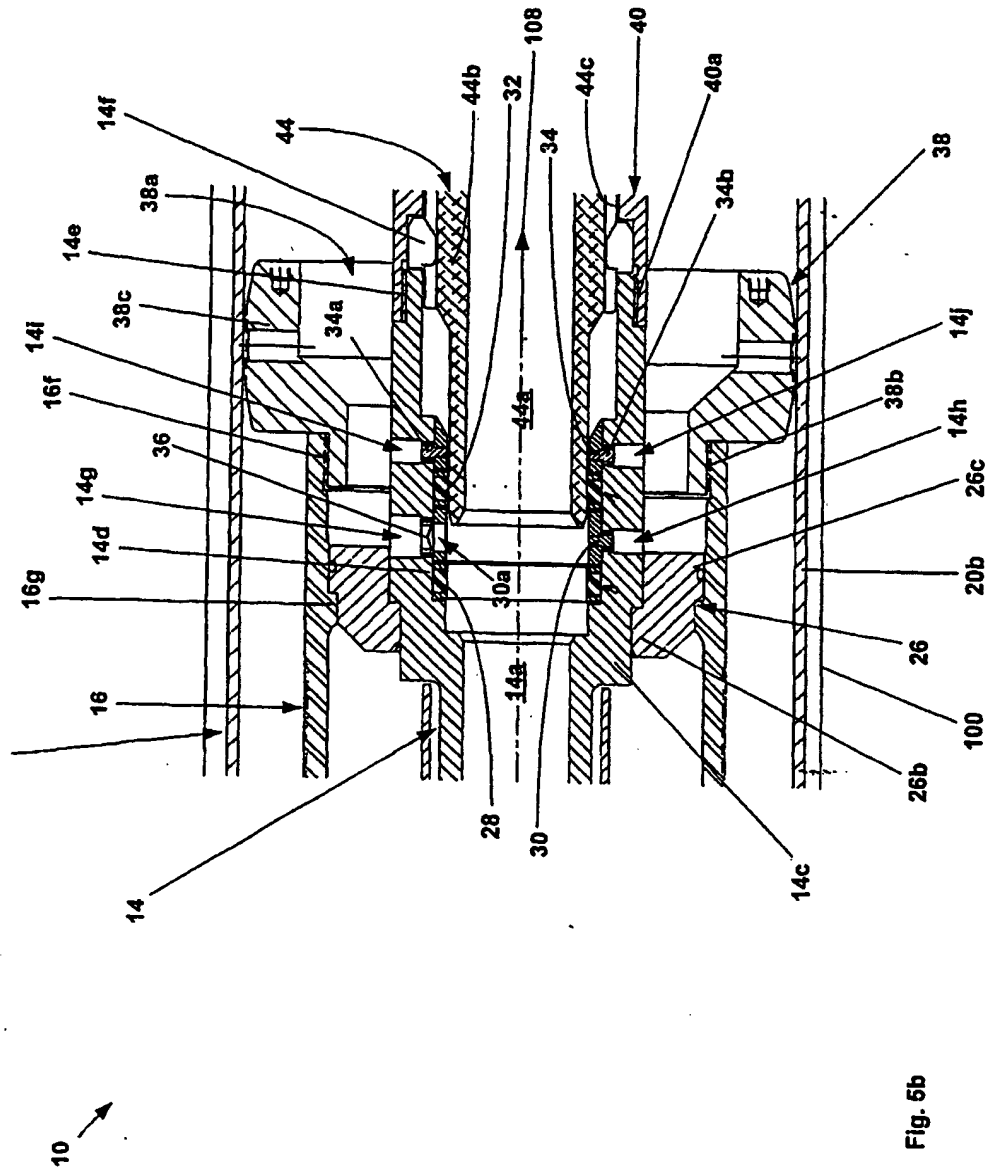


Fig. 5b

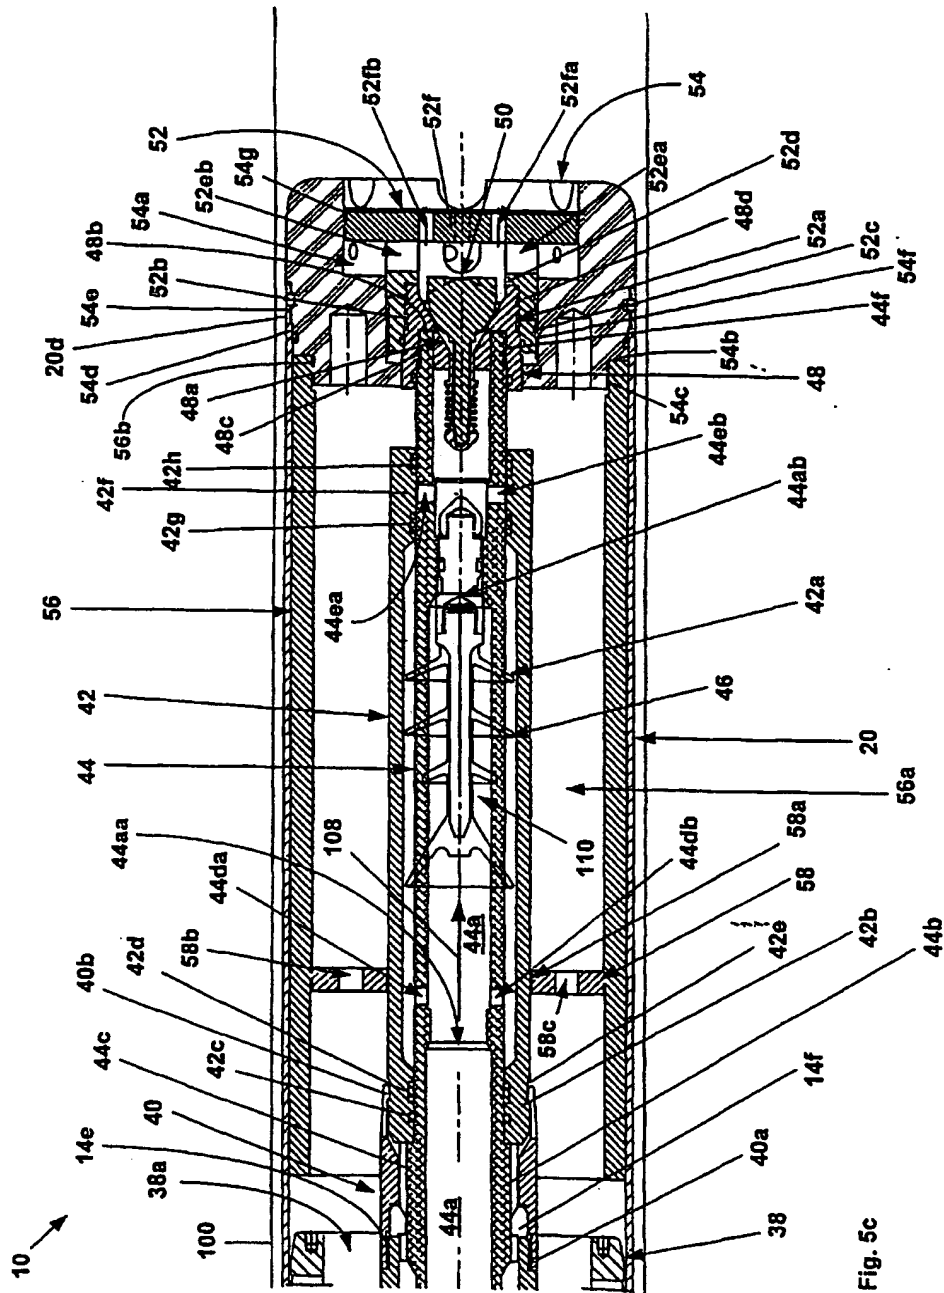


Fig. 5c

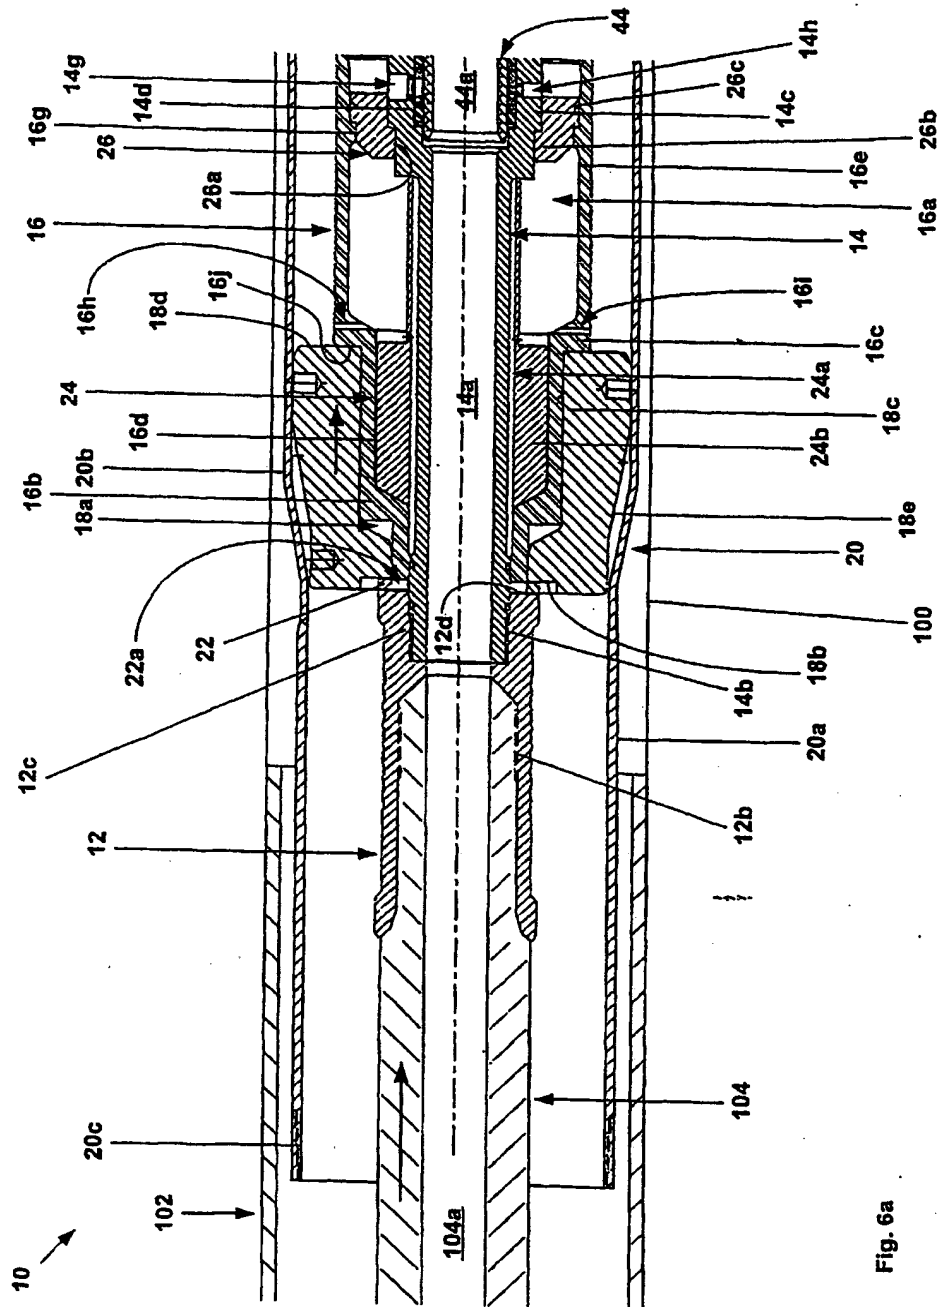


Fig. 6a

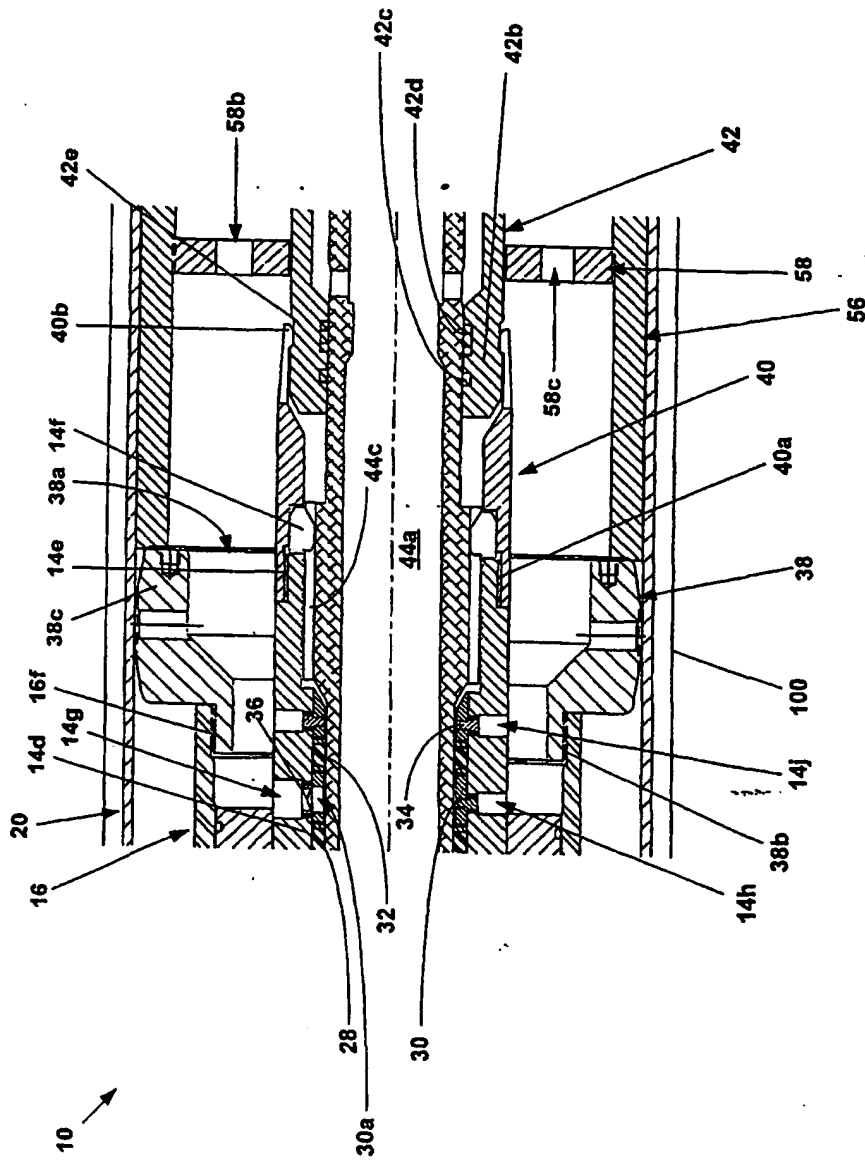


Fig. 6b.

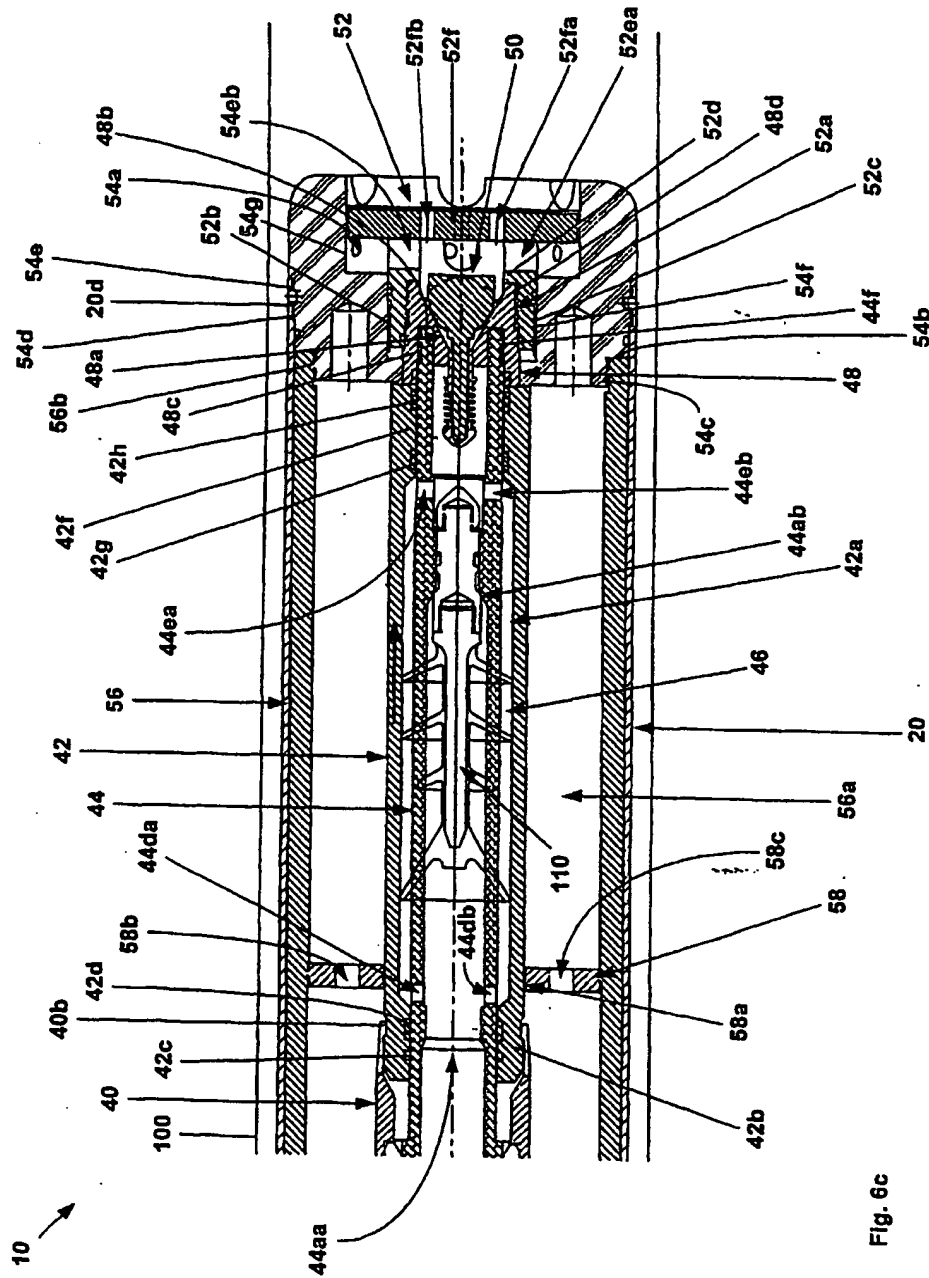


Fig. 6c

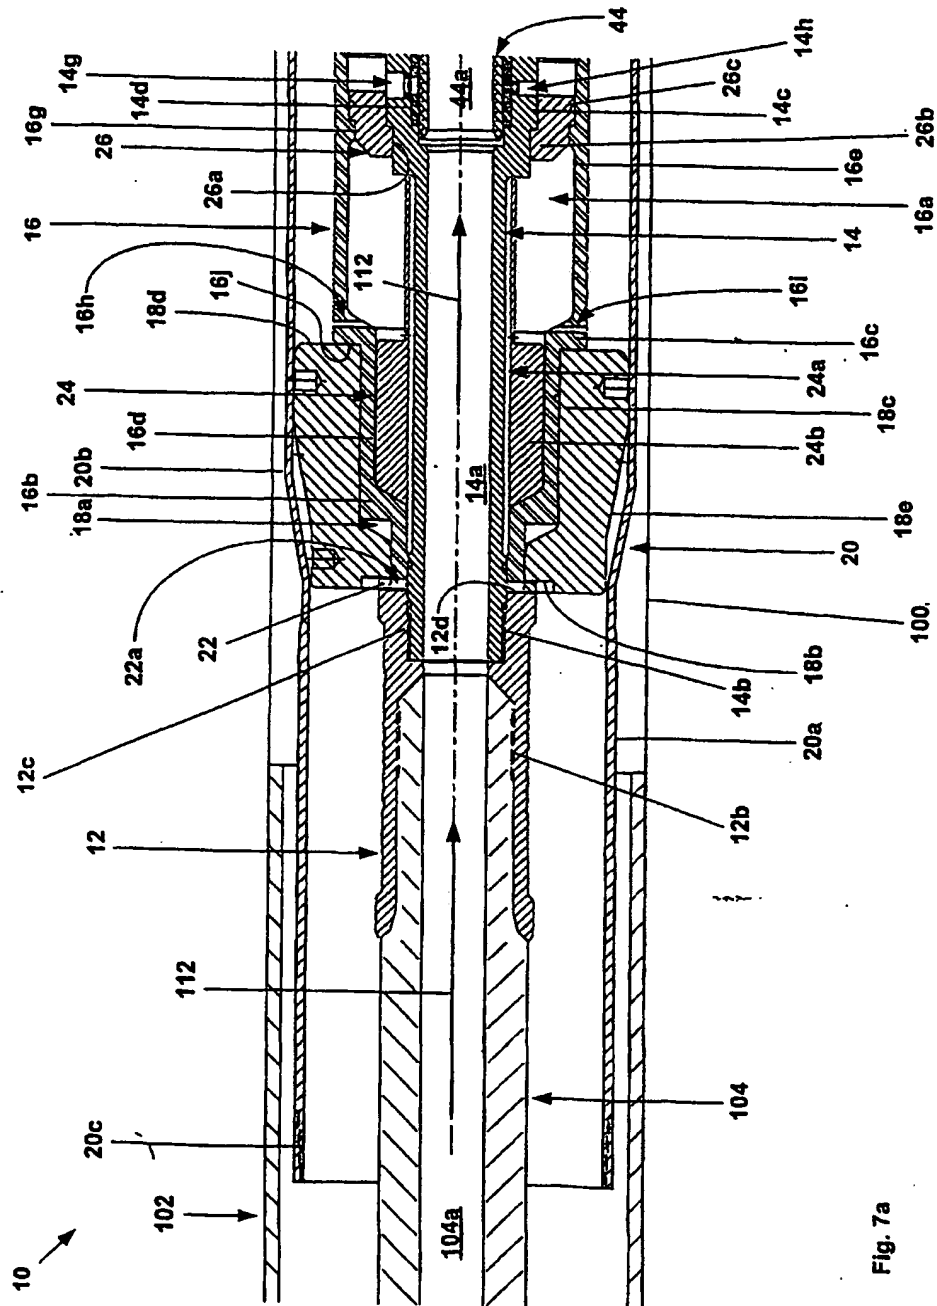


Fig. 7a

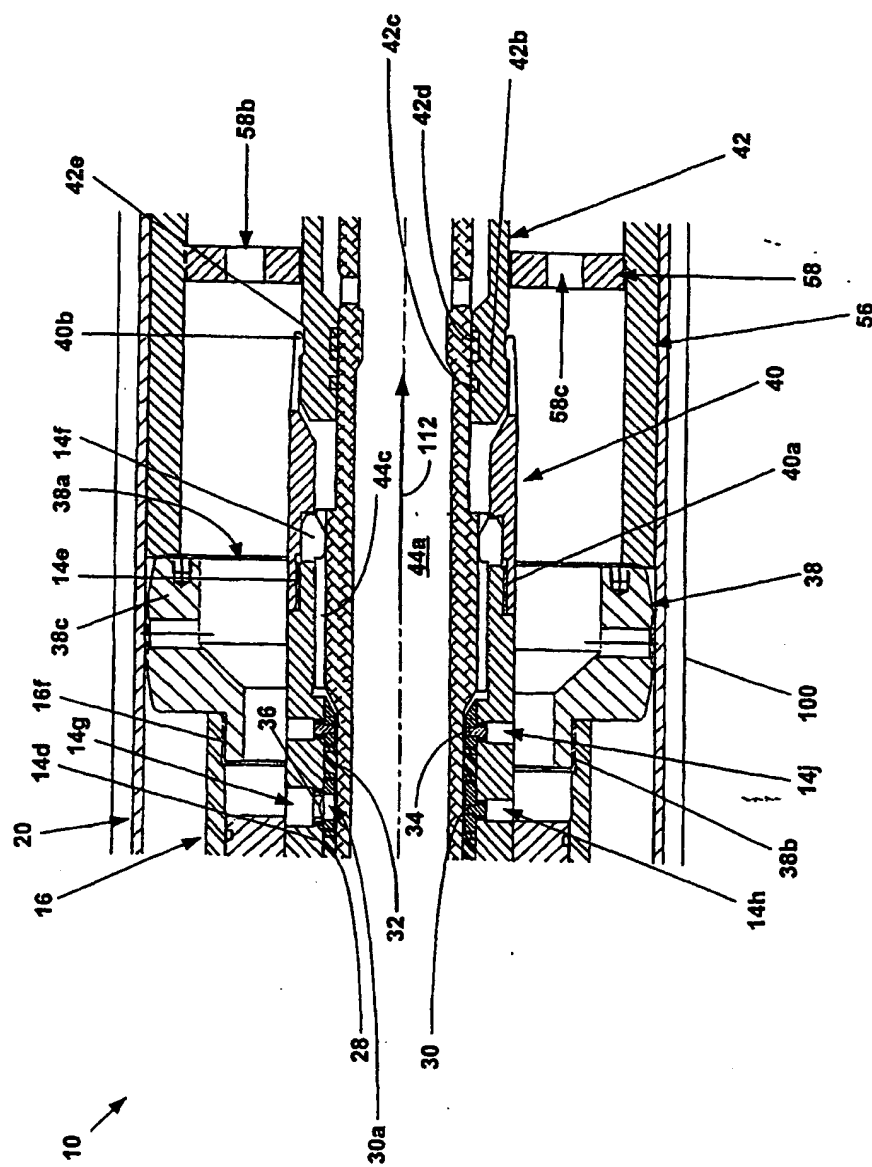


Fig. 7b

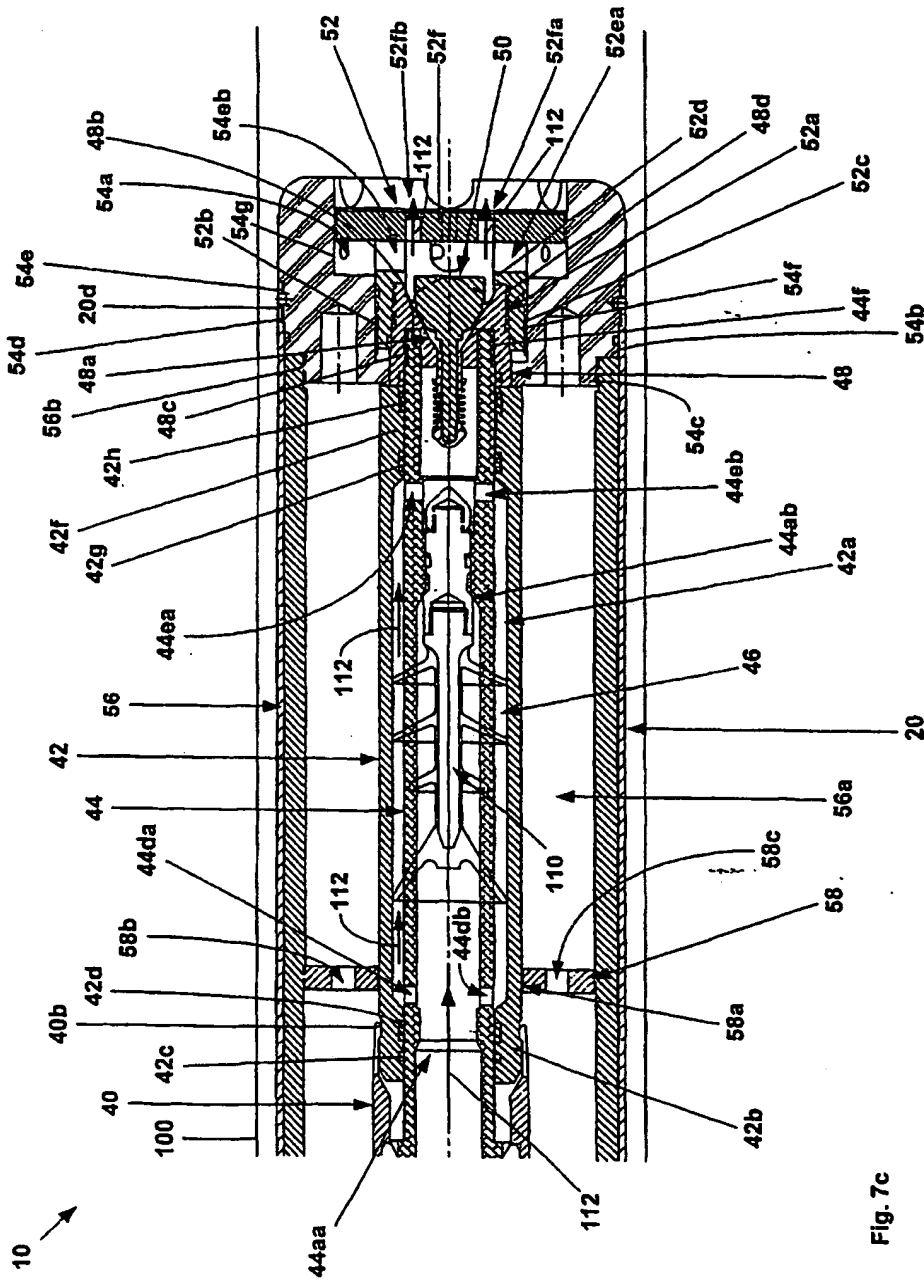


Fig. 7c

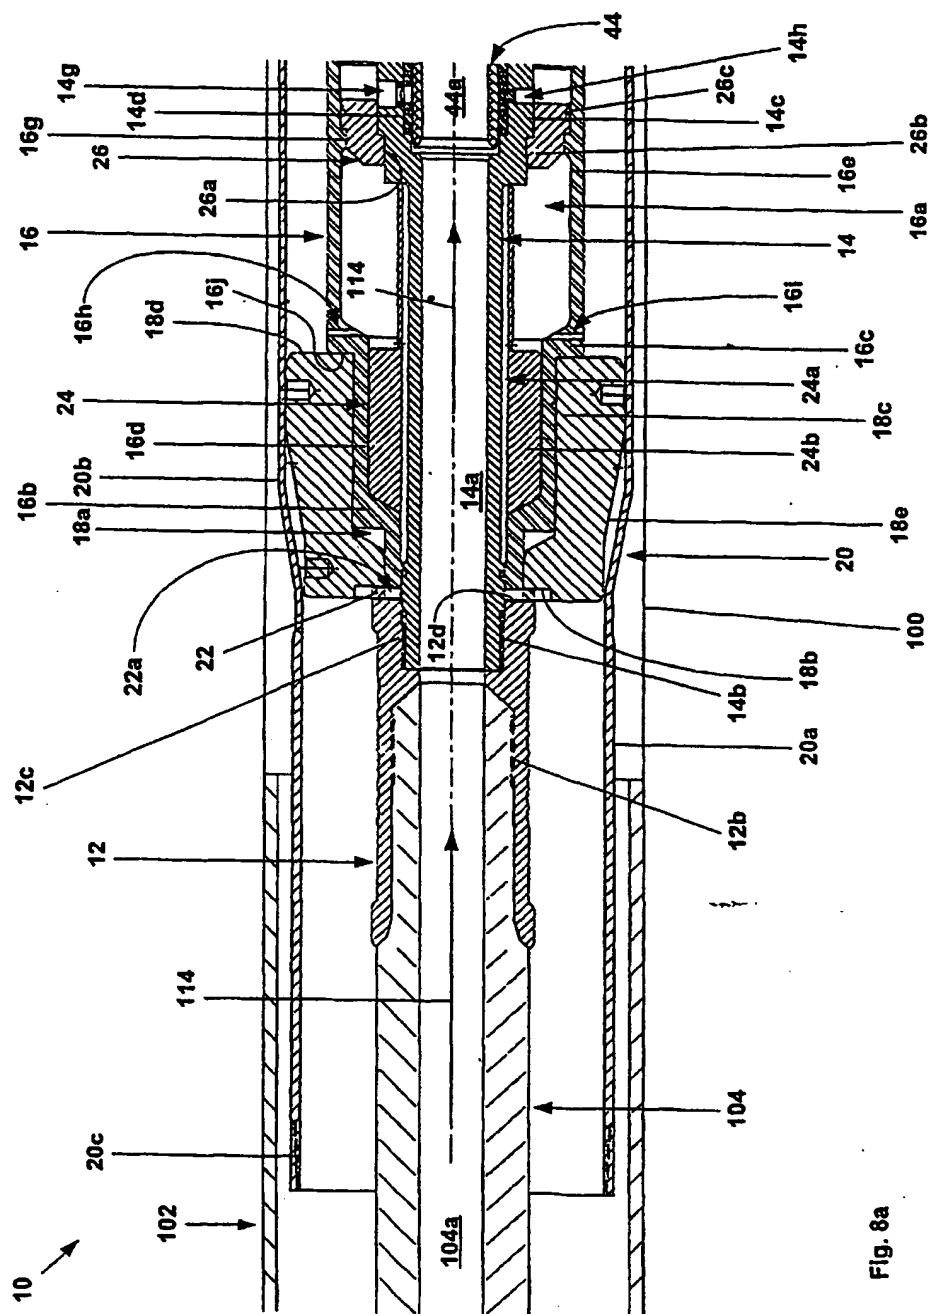


Fig. 8a


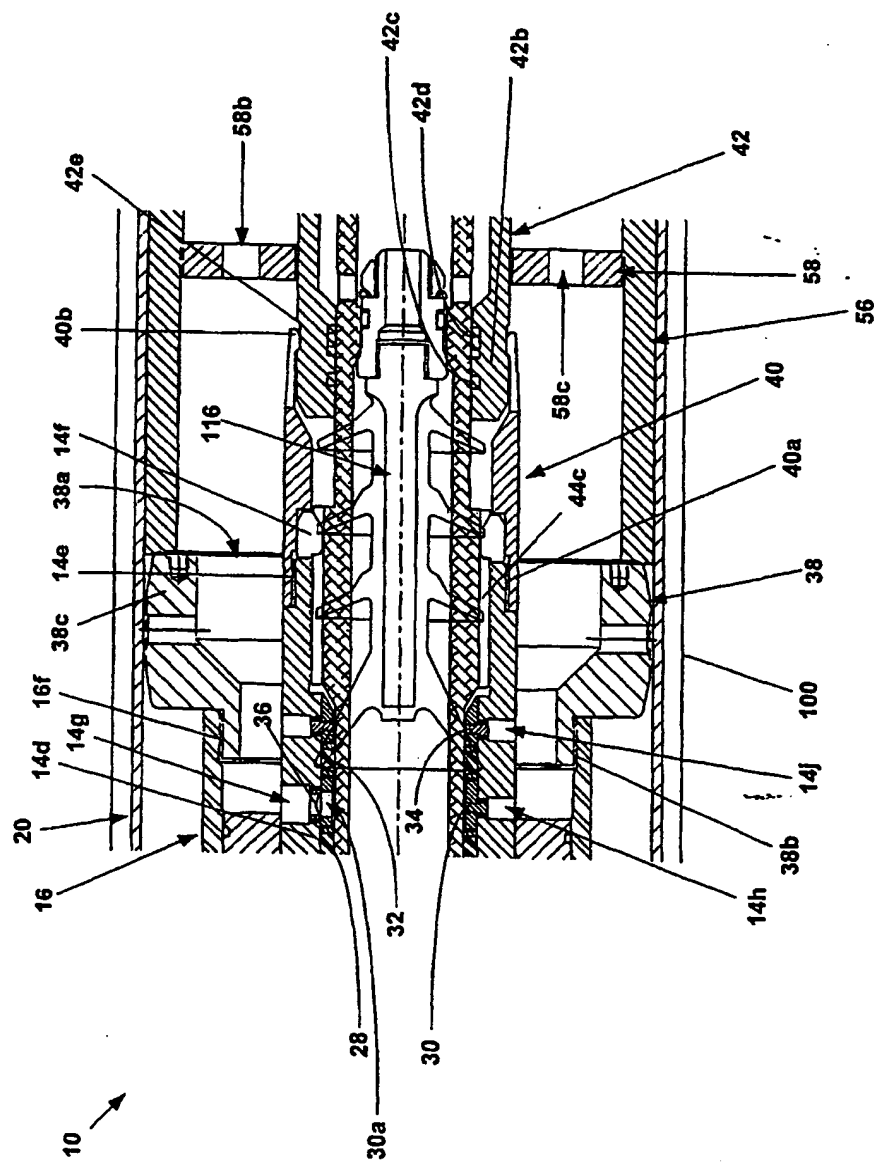


Fig. 8b



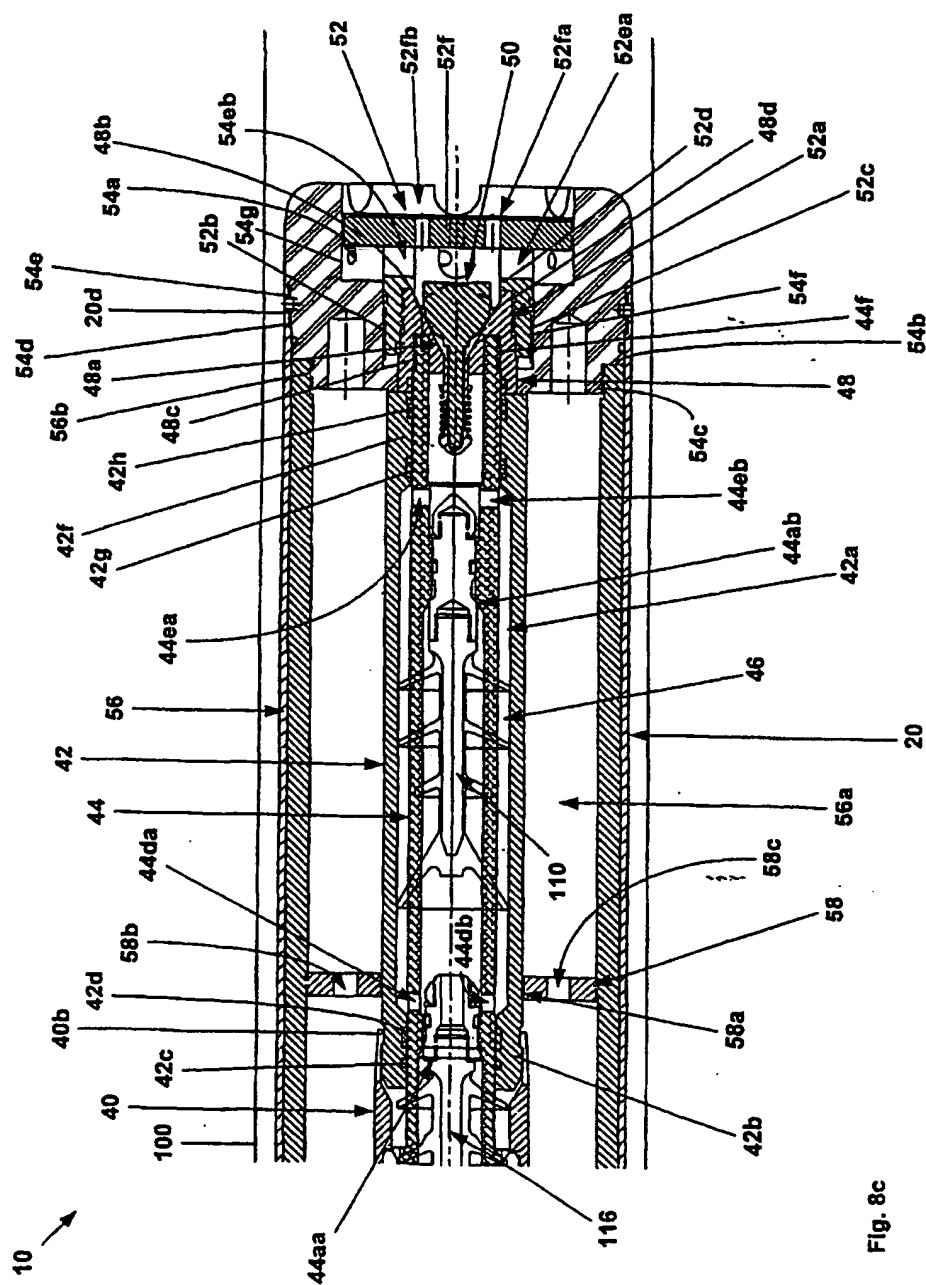

1. *Introduction*
 2. *Background*
 3. *Methodology*
 4. *Results*
 5. *Discussion*
 6. *Conclusion*
 7. *References*
 8. *Appendix*
 9. *Figure 1*
 10. *Figure 2*
 11. *Figure 3*
 12. *Figure 4*
 13. *Figure 5*
 14. *Figure 6*
 15. *Figure 7*
 16. *Figure 8*
 17. *Figure 9*
 18. *Figure 10*
 19. *Figure 11*
 20. *Figure 12*
 21. *Figure 13*
 22. *Figure 14*
 23. *Figure 15*
 24. *Figure 16*
 25. *Figure 17*
 26. *Figure 18*
 27. *Figure 19*
 28. *Figure 20*
 29. *Figure 21*
 30. *Figure 22*
 31. *Figure 23*
 32. *Figure 24*
 33. *Figure 25*
 34. *Figure 26*
 35. *Figure 27*
 36. *Figure 28*
 37. *Figure 29*
 38. *Figure 30*
 39. *Figure 31*
 40. *Figure 32*
 41. *Figure 33*
 42. *Figure 34*
 43. *Figure 35*
 44. *Figure 36*
 45. *Figure 37*
 46. *Figure 38*
 47. *Figure 39*
 48. *Figure 40*
 49. *Figure 41*
 50. *Figure 42*
 51. *Figure 43*
 52. *Figure 44*
 53. *Figure 45*
 54. *Figure 46*
 55. *Figure 47*
 56. *Figure 48*
 57. *Figure 49*
 58. *Figure 50*
 59. *Figure 51*
 60. *Figure 52*
 61. *Figure 53*
 62. *Figure 54*
 63. *Figure 55*
 64. *Figure 56*
 65. *Figure 57*
 66. *Figure 58*
 67. *Figure 59*
 68. *Figure 60*
 69. *Figure 61*
 70. *Figure 62*
 71. *Figure 63*
 72. *Figure 64*
 73. *Figure 65*
 74. *Figure 66*
 75. *Figure 67*
 76. *Figure 68*
 77. *Figure 69*
 78. *Figure 70*
 79. *Figure 71*
 80. *Figure 72*
 81. *Figure 73*
 82. *Figure 74*
 83. *Figure 75*
 84. *Figure 76*
 85. *Figure 77*
 86. *Figure 78*
 87. *Figure 79*
 88. *Figure 80*
 89. *Figure 81*
 90. *Figure 82*
 91. *Figure 83*
 92. *Figure 84*
 93. *Figure 85*
 94. *Figure 86*
 95. *Figure 87*
 96. *Figure 88*
 97. *Figure 89*
 98. *Figure 90*
 99. *Figure 91*
 100. *Figure 92*
 101. *Figure 93*
 102. *Figure 94*
 103. *Figure 95*
 104. *Figure 96*
 105. *Figure 97*
 106. *Figure 98*
 107. *Figure 99*
 108. *Figure 100*
 109. *Figure 101*
 110. *Figure 102*
 111. *Figure 103*
 112. *Figure 104*
 113. *Figure 105*
 114. *Figure 106*
 115. *Figure 107*
 116. *Figure 108*
 117. *Figure 109*
 118. *Figure 110*
 119. *Figure 111*
 120. *Figure 112*
 121. *Figure 113*
 122. *Figure 114*
 123. *Figure 115*
 124. *Figure 116*
 125. *Figure 117*
 126. *Figure 118*
 127. *Figure 119*
 128. *Figure 120*
 129. *Figure 121*
 130. *Figure 122*
 131. *Figure 123*
 132. *Figure 124*
 133. *Figure 125*
 134. *Figure 126*
 135. *Figure 127*
 136. *Figure 128*
 137. *Figure 129*
 138. *Figure 130*
 139. *Figure 131*
 140. *Figure 132*
 141. *Figure 133*
 142. *Figure 134*
 143. *Figure 135*
 144. *Figure 136*
 145. *Figure 137*
 146. *Figure 138*
 147. *Figure 139*
 148. *Figure 140*
 149. *Figure 141*
 150. *Figure 142*
 151. *Figure 143*
 152. *Figure 144*
 153. *Figure 145*
 154. *Figure 146*
 155. *Figure 147*
 156. *Figure 148*
 157. *Figure 149*
 158. *Figure 150*
 159. *Figure 151*
 160. *Figure 152*
 161. *Figure 153*
 162. *Figure 154*
 163. *Figure 155*
 164. *Figure 156*
 165. *Figure 157*
 166. *Figure 158*
 167. *Figure 159*
 168. *Figure 160*
 169. *Figure 161*
 170. *Figure 162*
 171. *Figure 163*
 172. *Figure 164*
 173. *Figure 165*
 174. *Figure 166*
 175. *Figure 167*
 176. *Figure 168*
 177. *Figure 169*
 178. *Figure 170*
 179. *Figure 171*
 180. *Figure 172*
 181. *Figure 173*
 182. *Figure 174*
 183. *Figure 175*
 184. *Figure 176*
 185. *Figure 177*
 186. *Figure 178*
 187. *Figure 179*
 188. *Figure 180*
 189. *Figure 181*
 190. *Figure 182*
 191. *Figure 183*
 192. *Figure 184*
 193. *Figure 185*
 194. *Figure 186*
 195. *Figure 187*
 196. *Figure 188*
 197. *Figure 189*
 198. *Figure 190*
 199. *Figure 191*
 200. *Figure 192*
 201. *Figure 193*
 202. *Figure 194*
 203. *Figure 195*
 204. *Figure 196*
 205. *Figure 197*
 206. *Figure 198*
 207. *Figure 199*
 208. *Figure 200*
 209. *Figure 201*
 210. *Figure 202*
 211. *Figure 203*
 212. *Figure 204*
 213. *Figure 205*
 214. *Figure 206*
 215. *Figure 207*
 216. *Figure 208*
 217. *Figure 209*

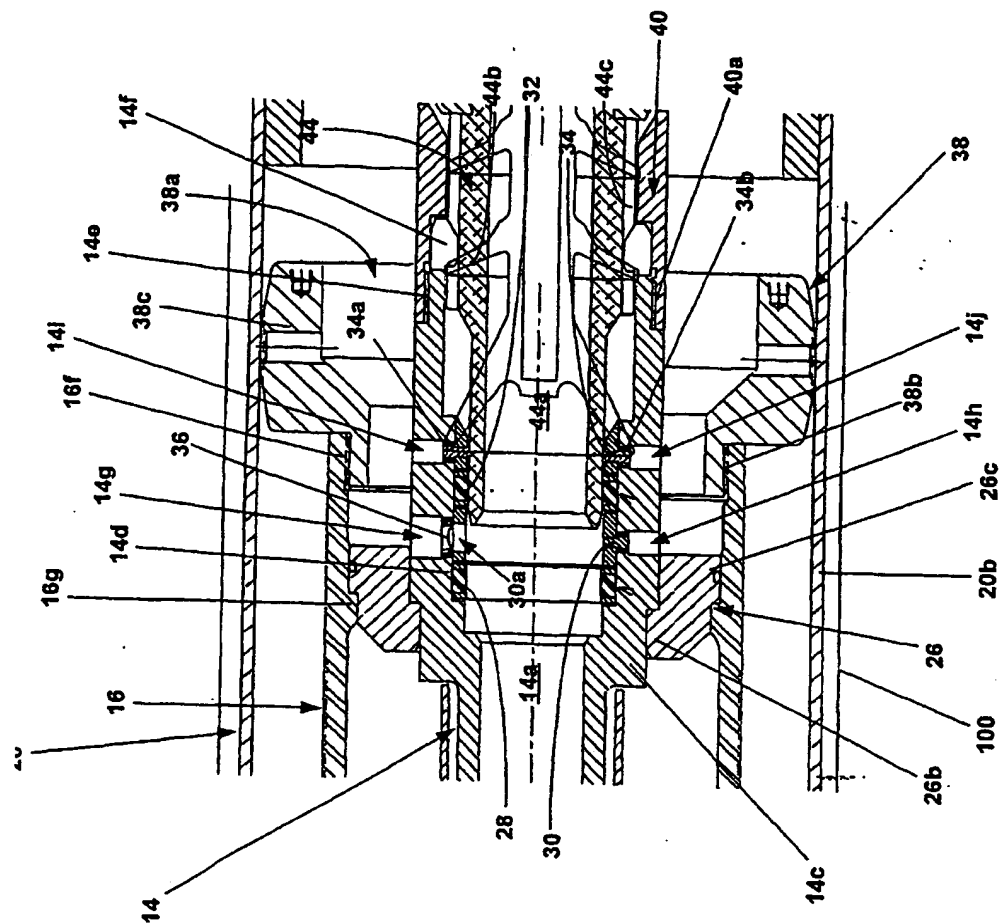
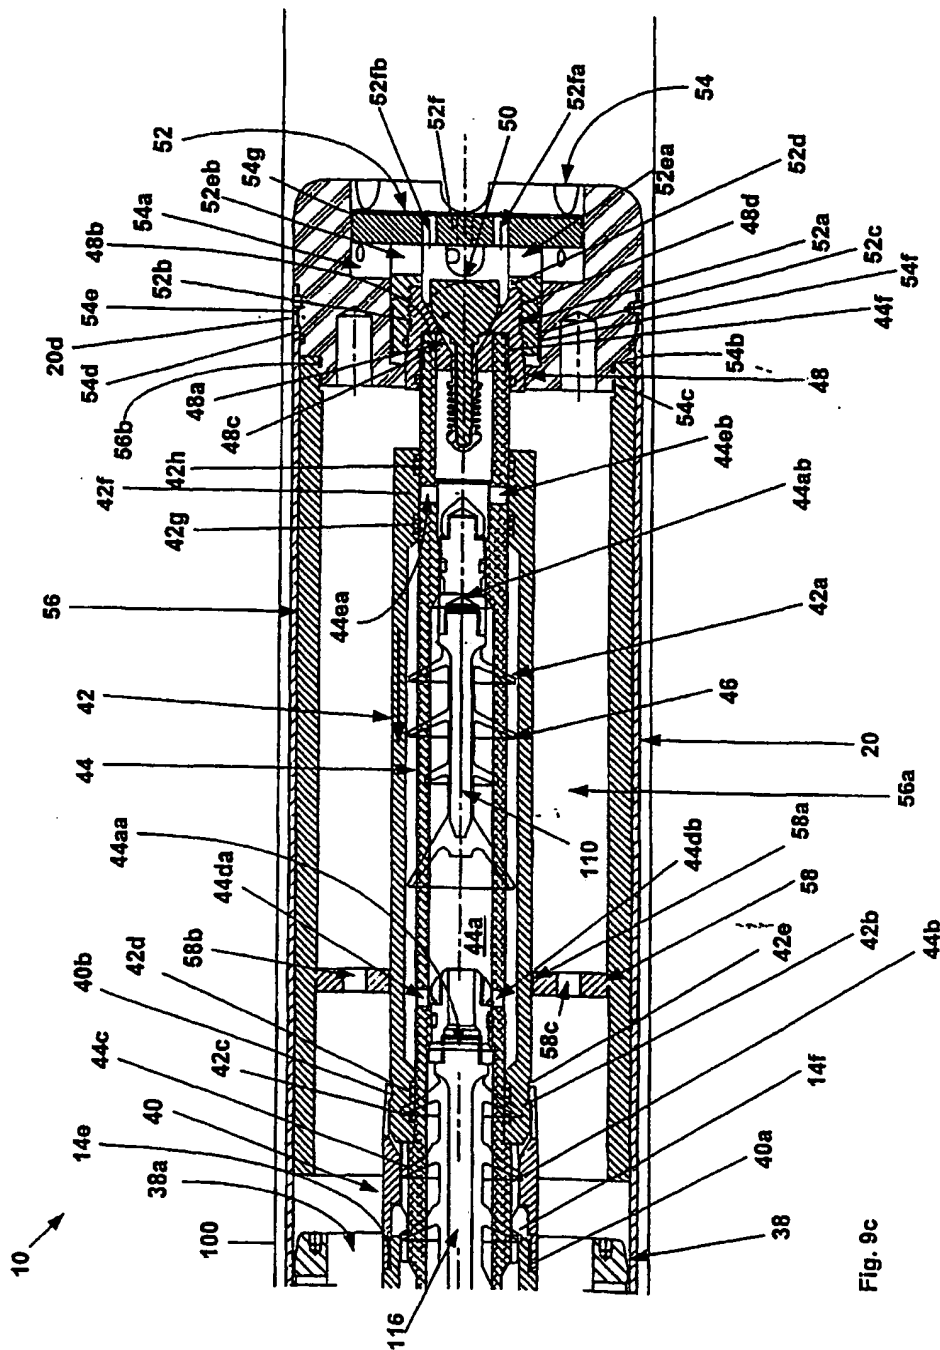


Fig. 9b



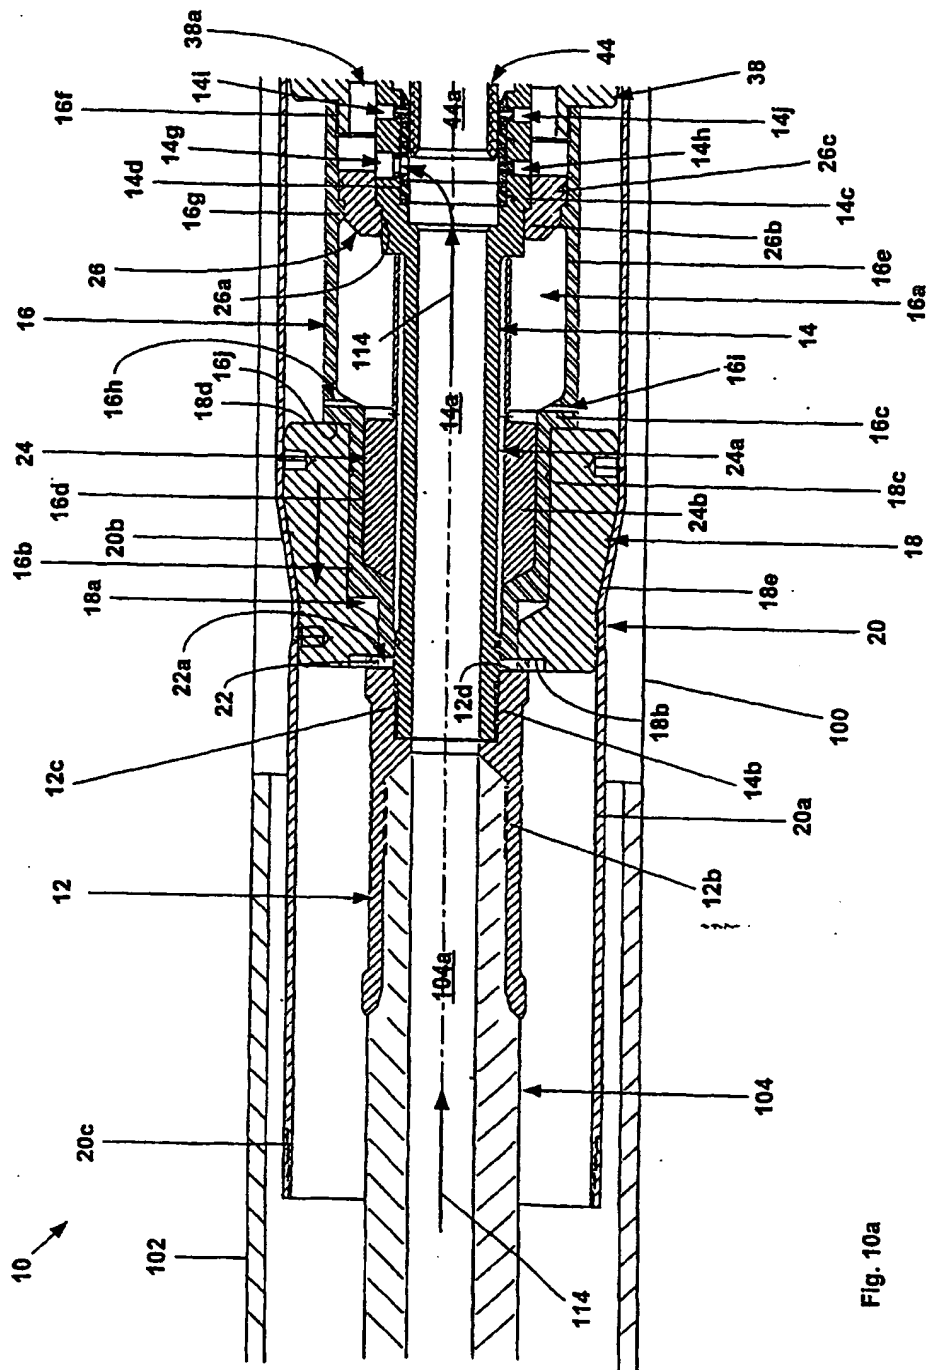


Fig. 10a

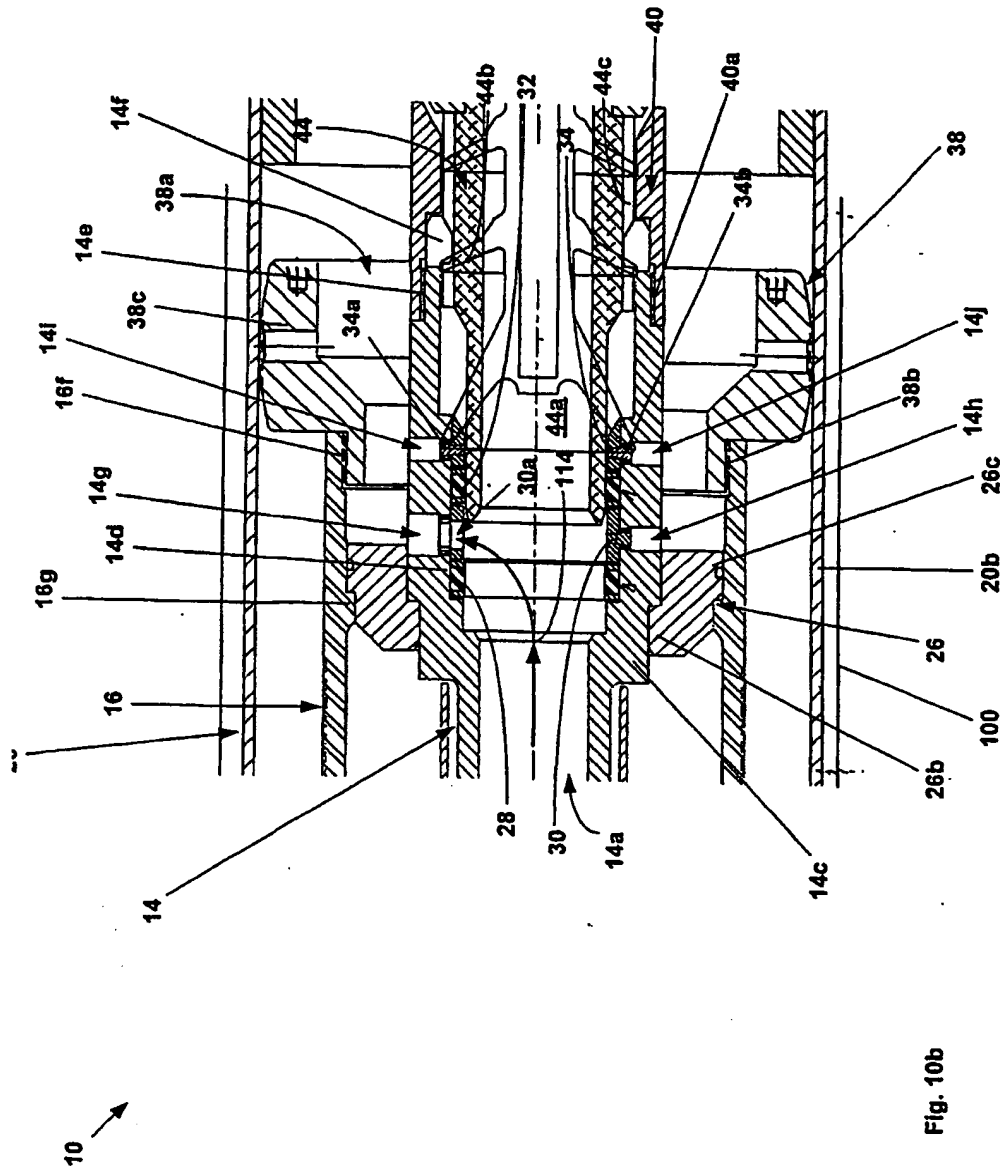


Fig. 10b

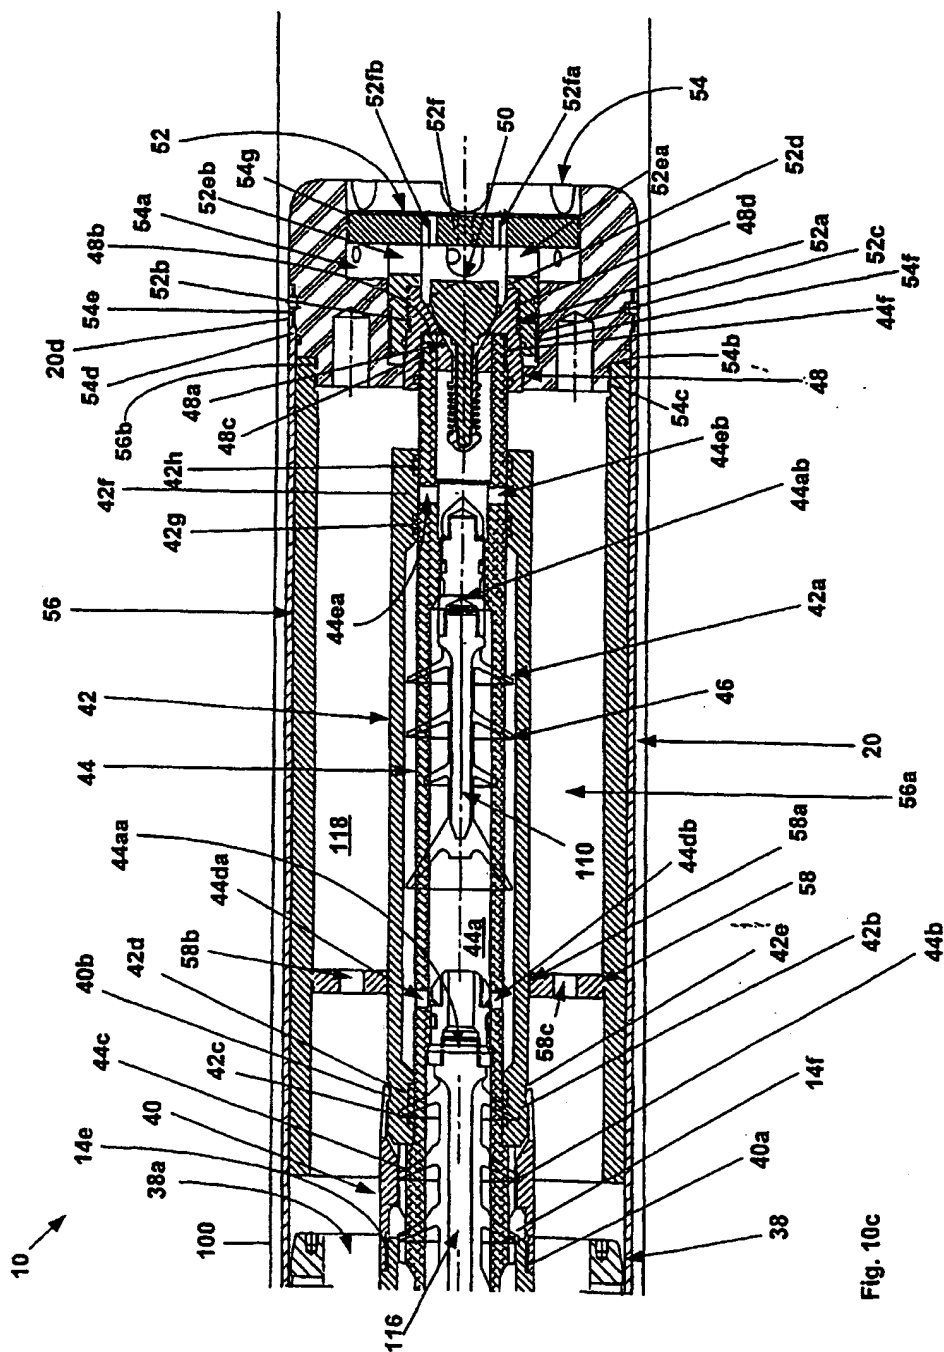


Fig. 10c

250

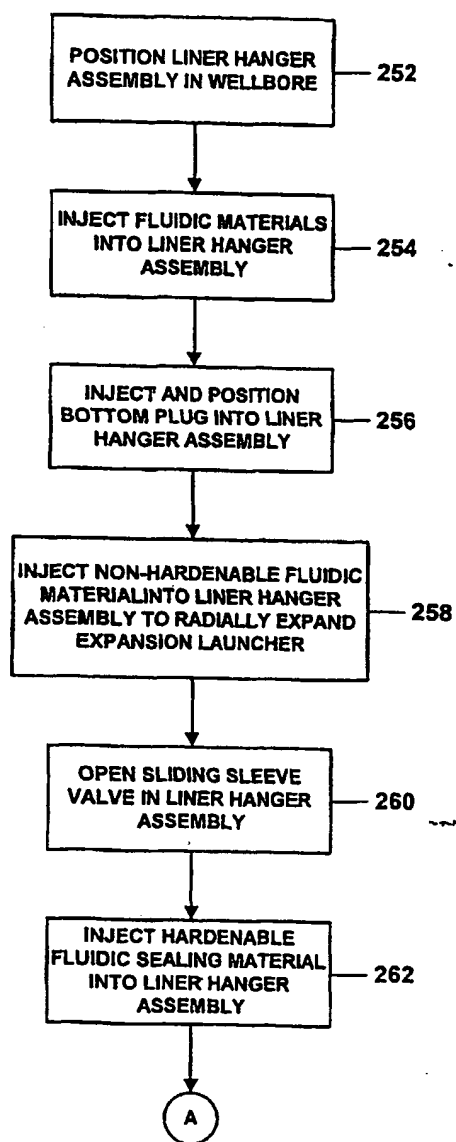


Fig. 11a

250

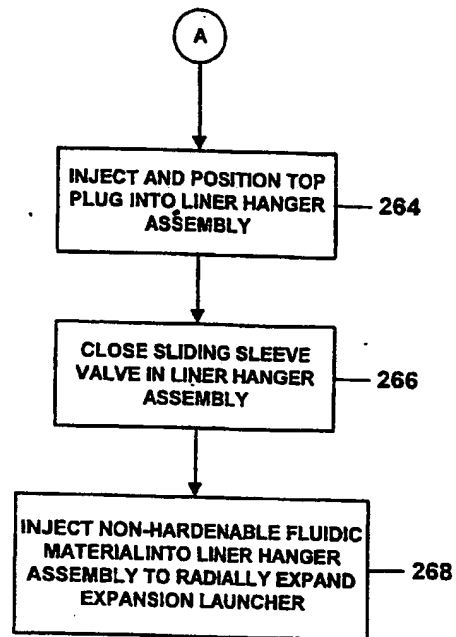
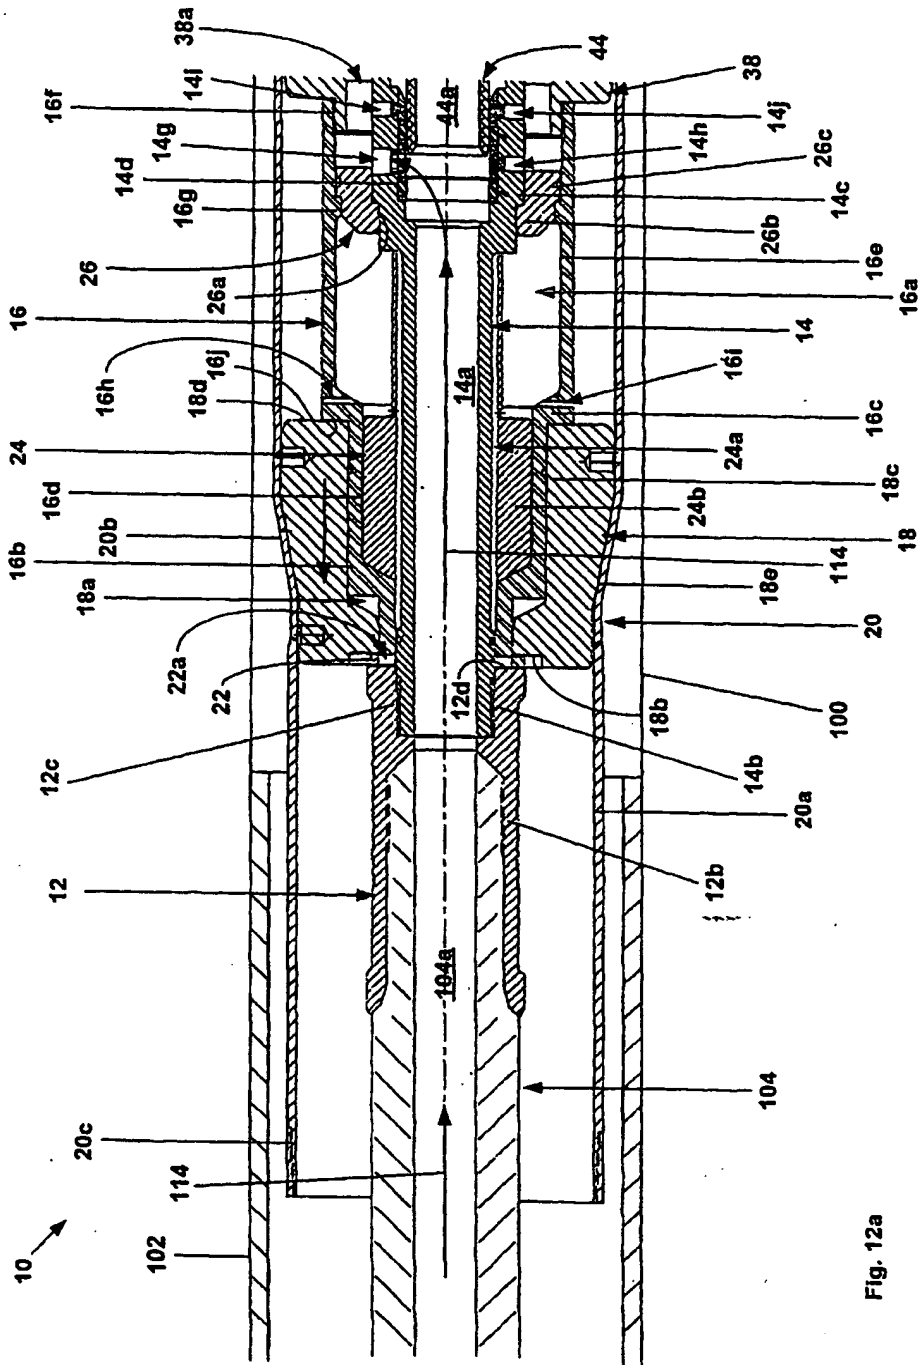


Fig. 11b



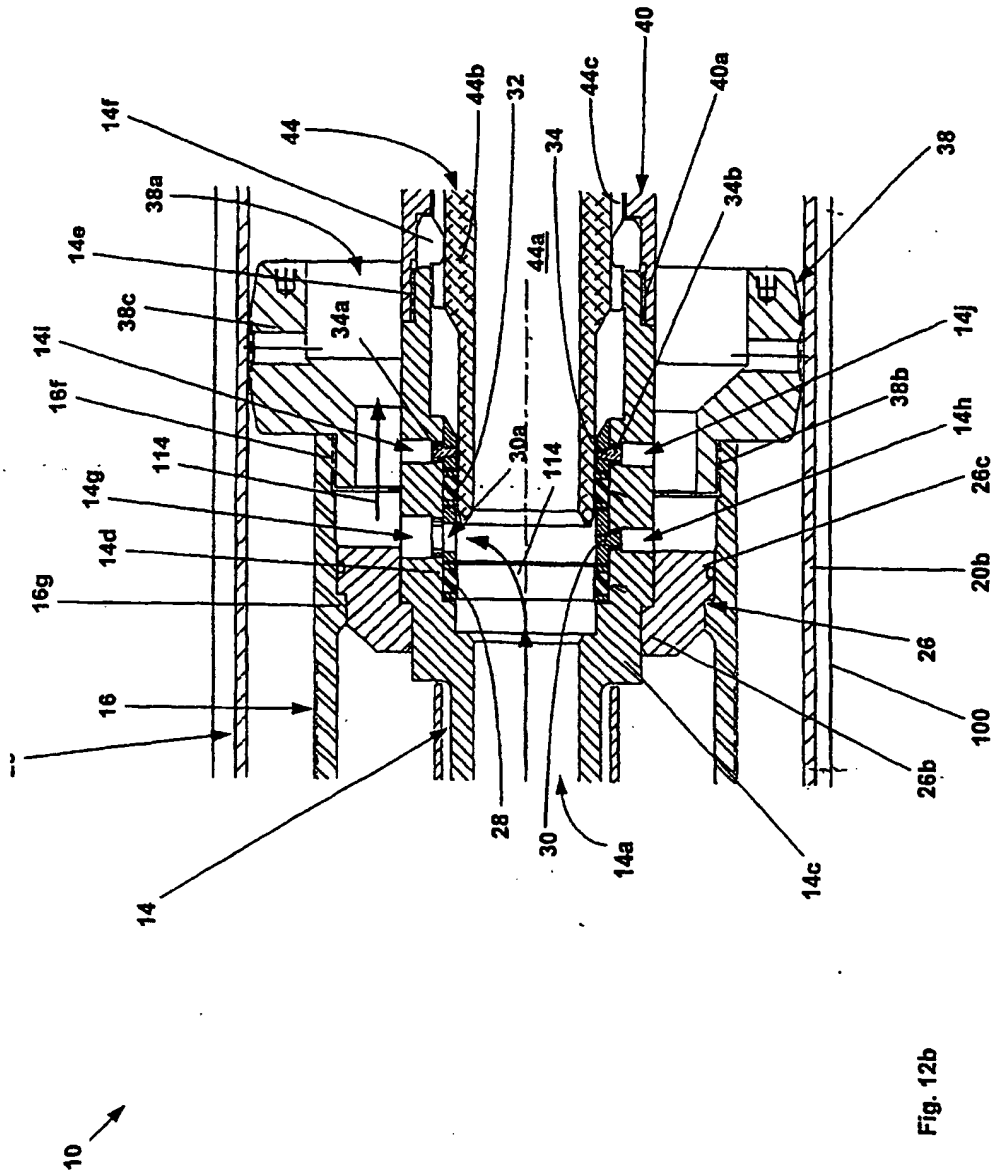
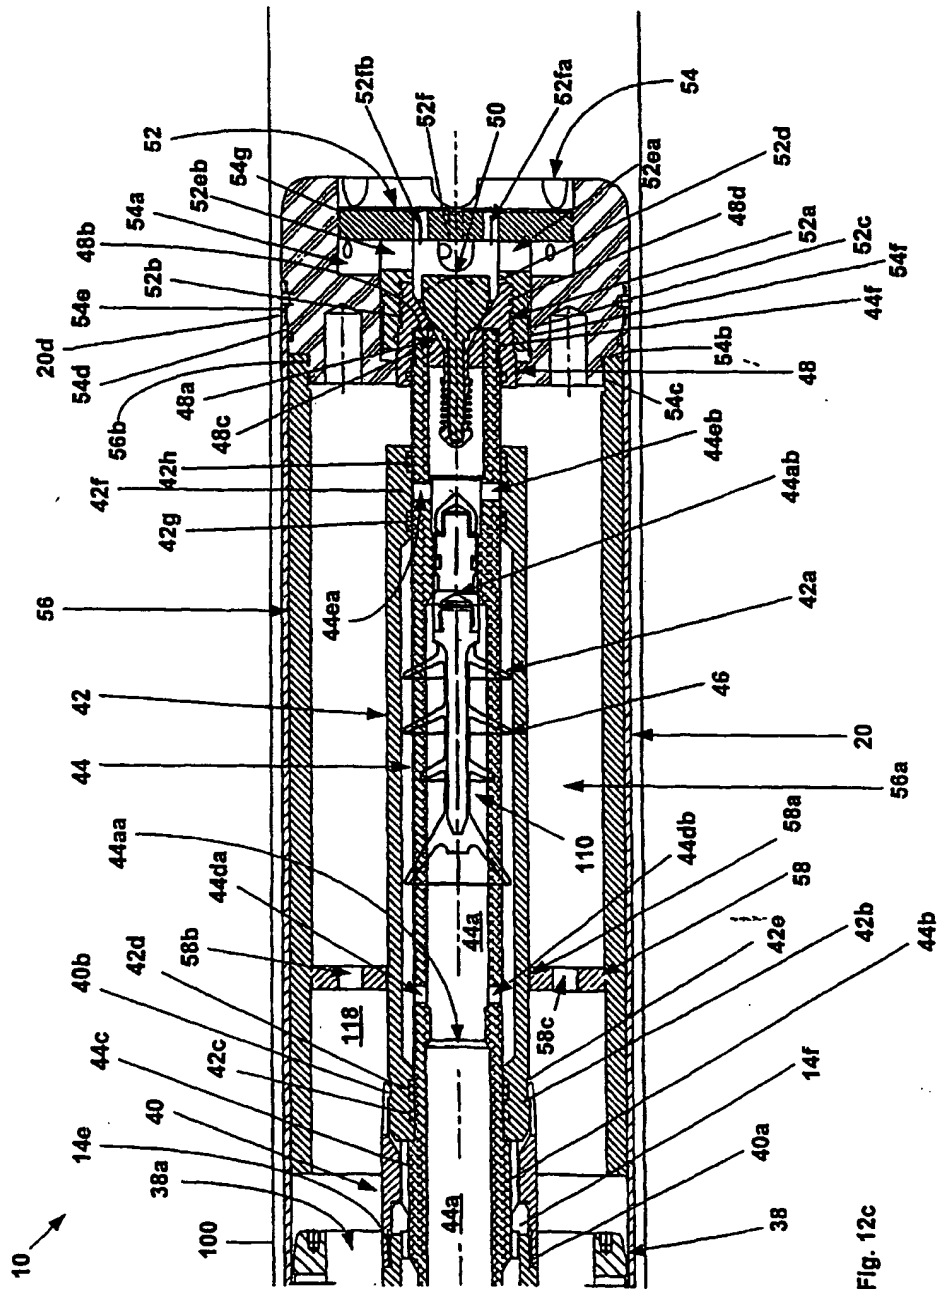


Fig. 12b



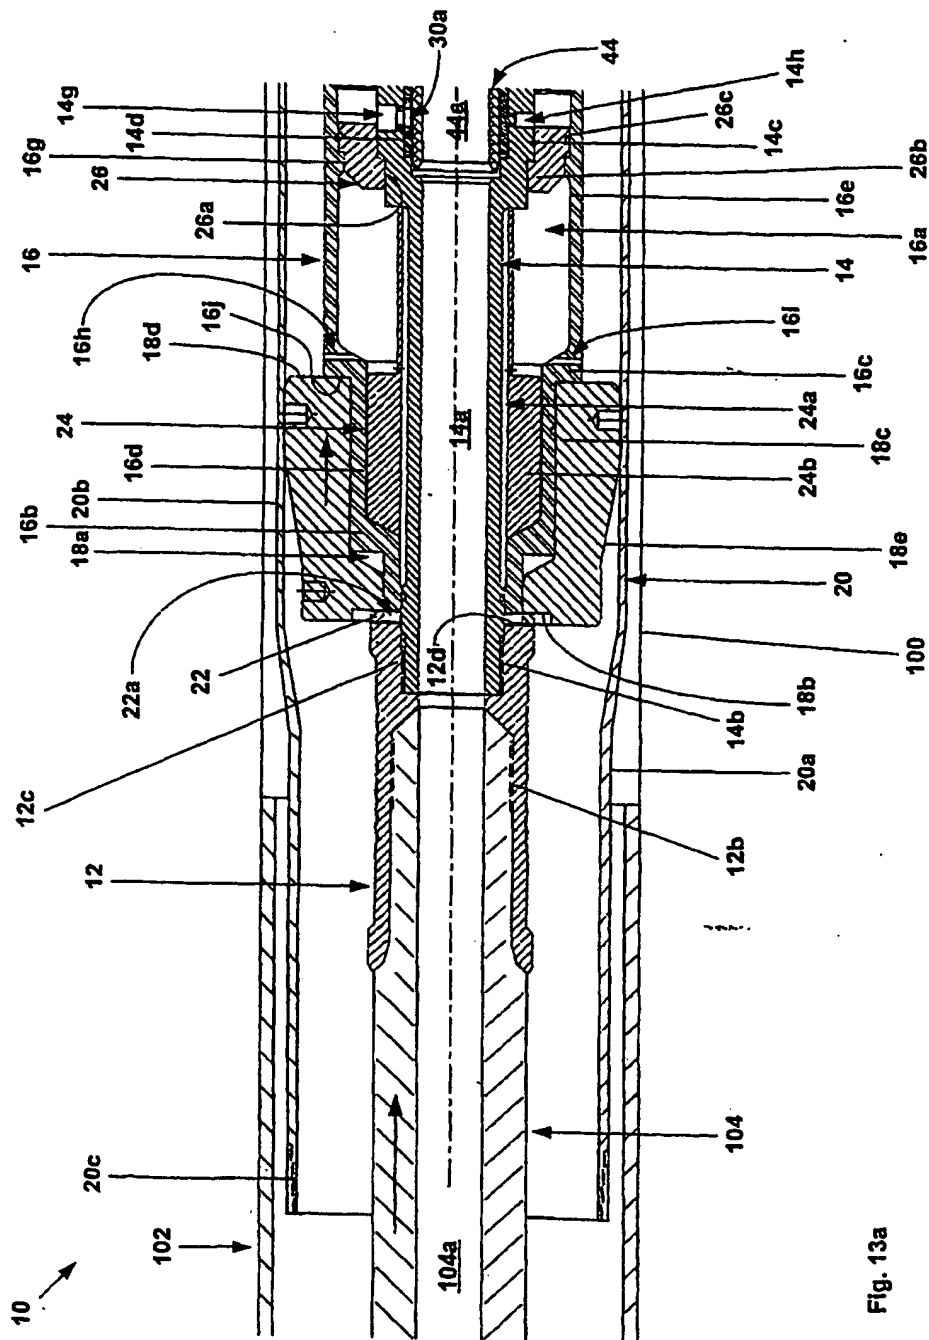


Fig. 13a

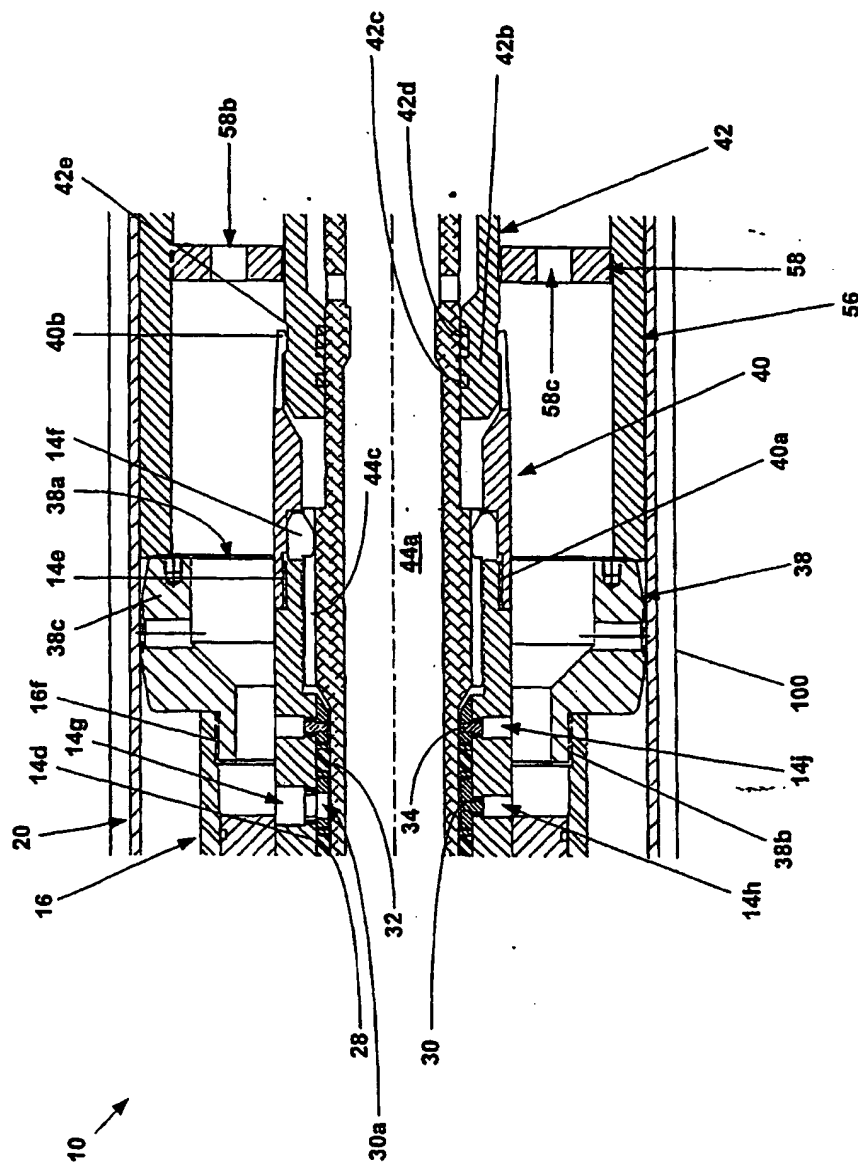
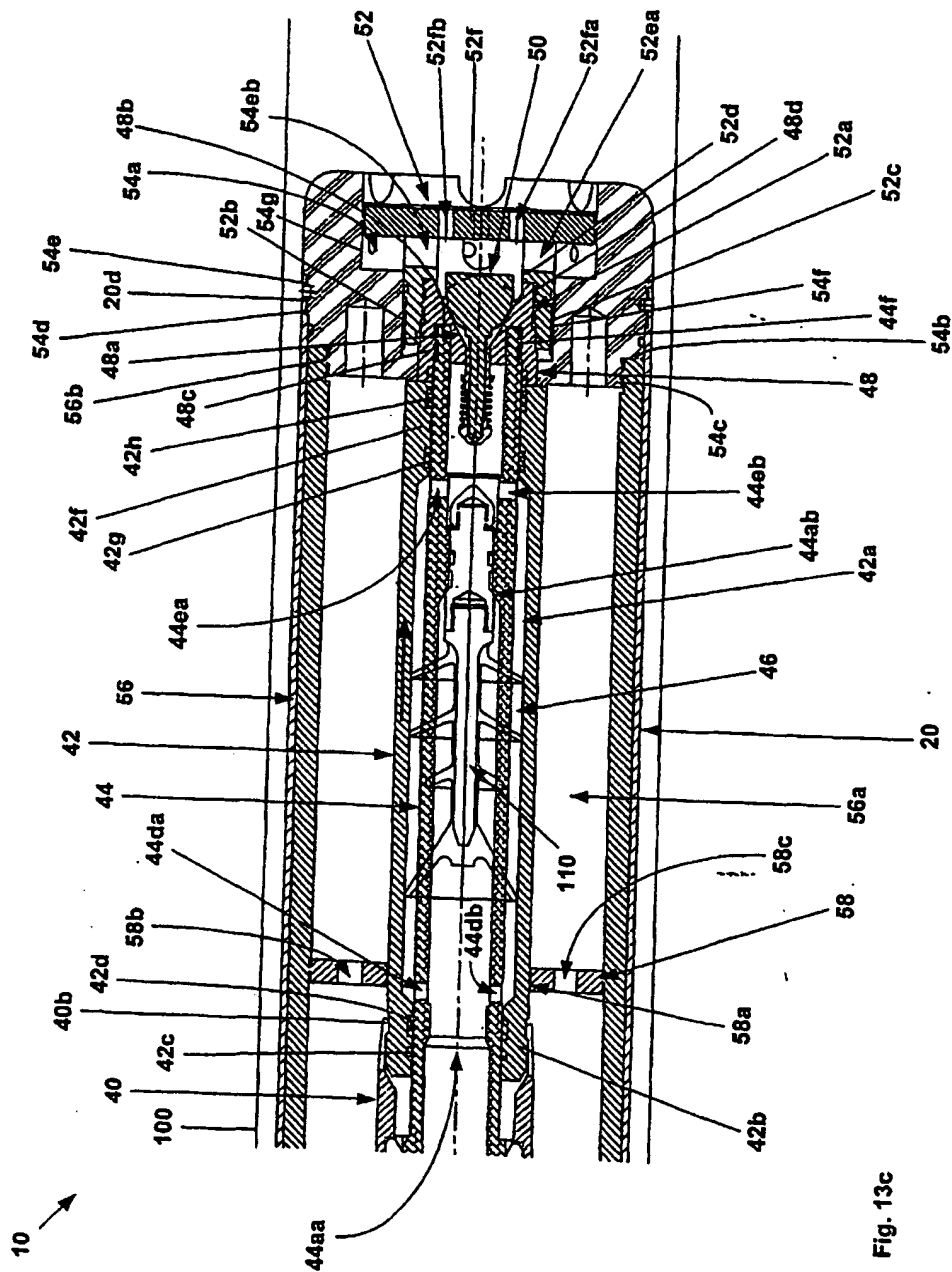
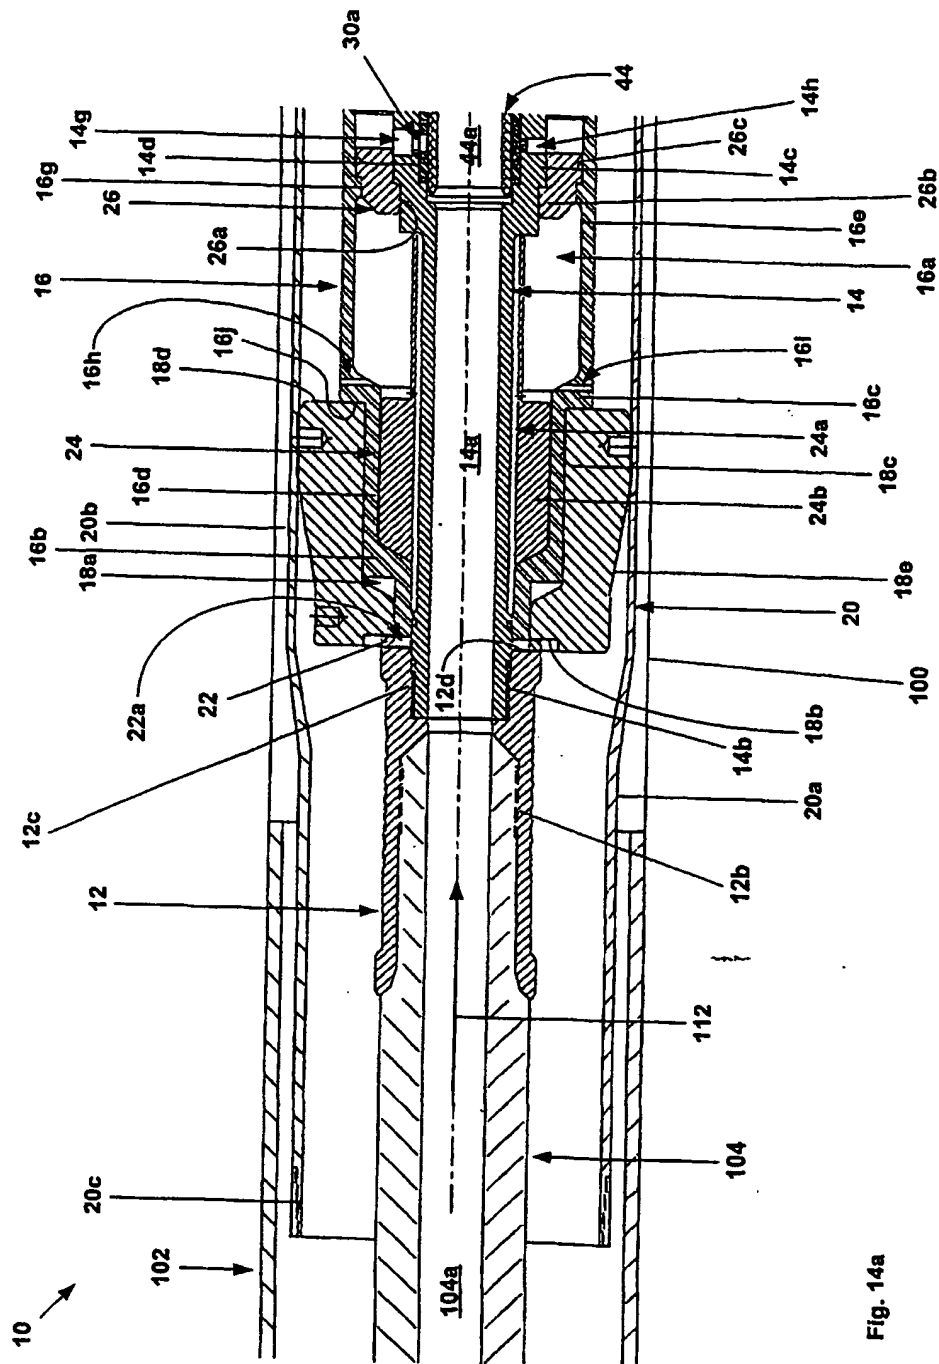


Fig. 13b





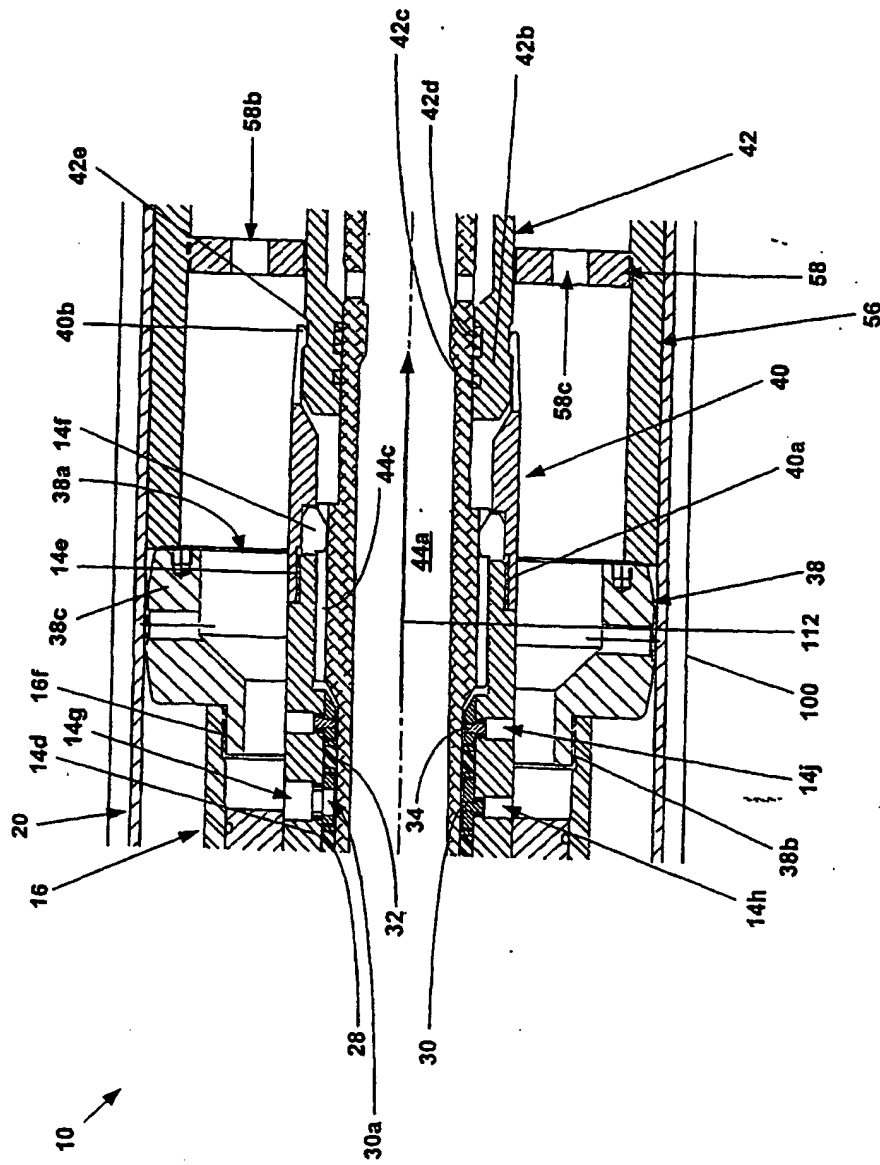


Fig. 14b

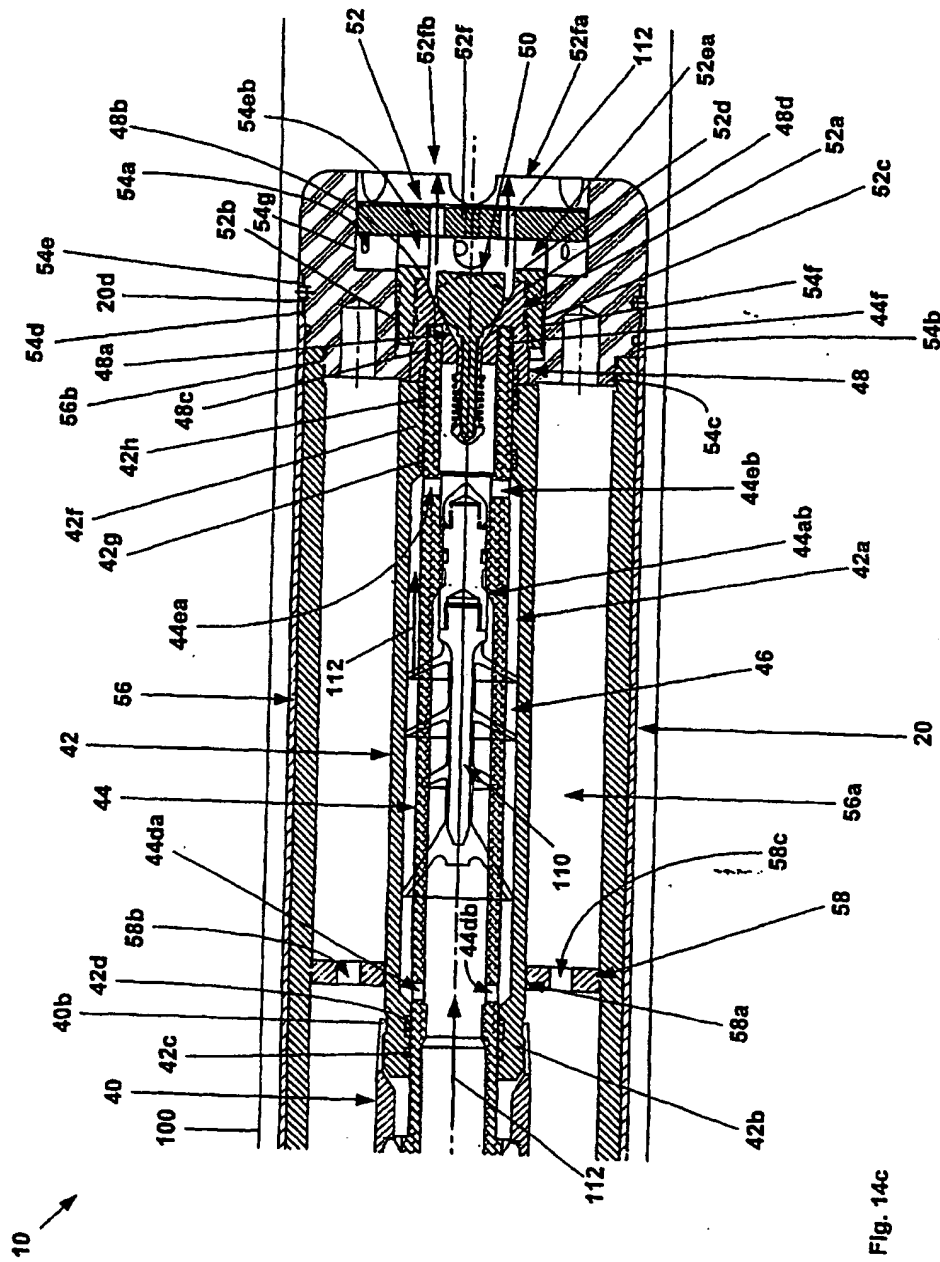


Fig. 14c

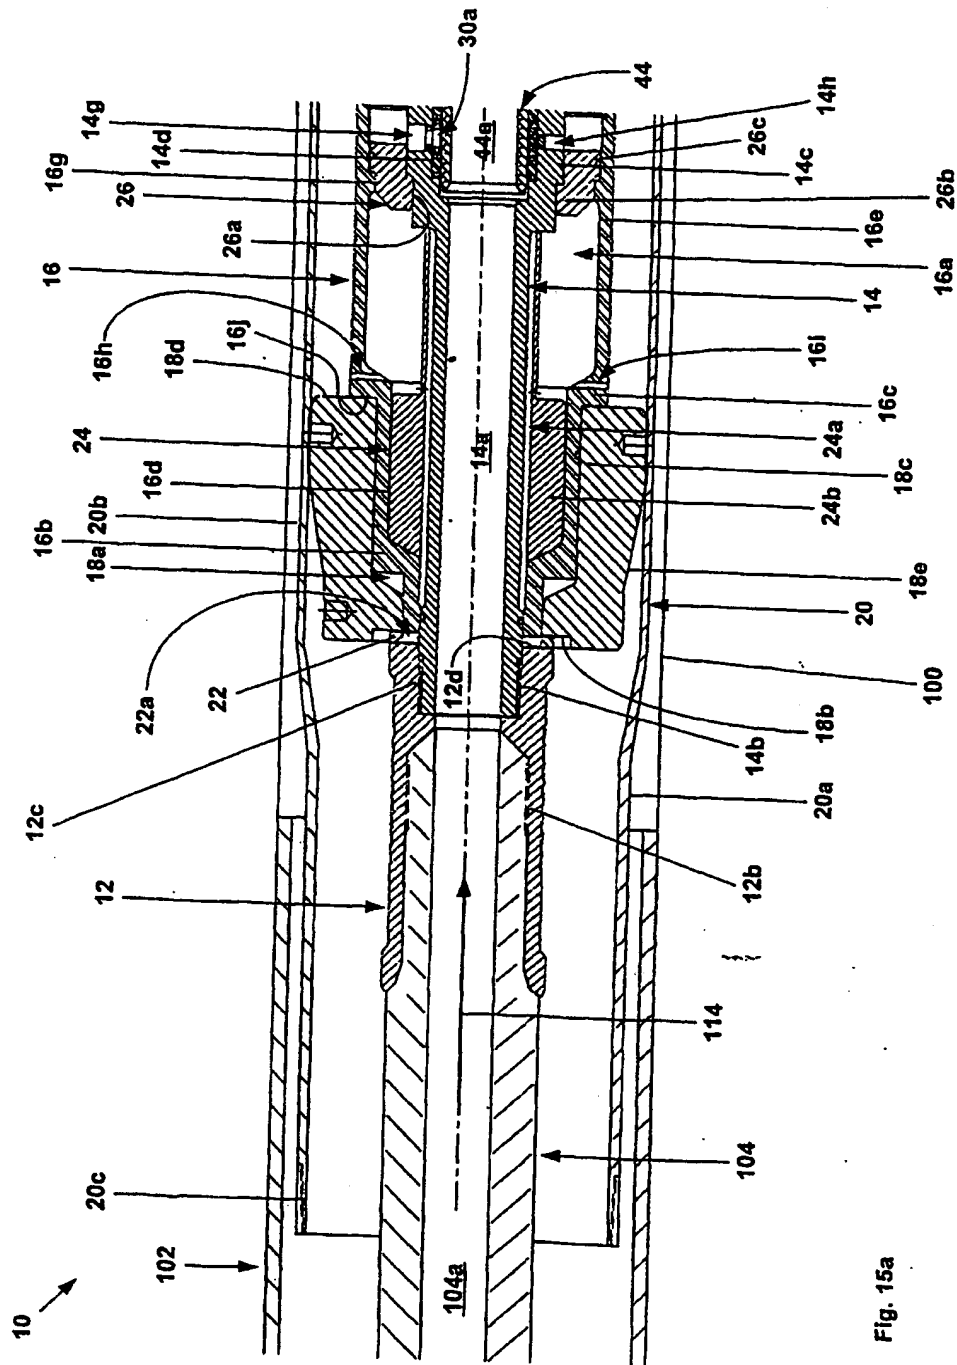


Fig. 15a

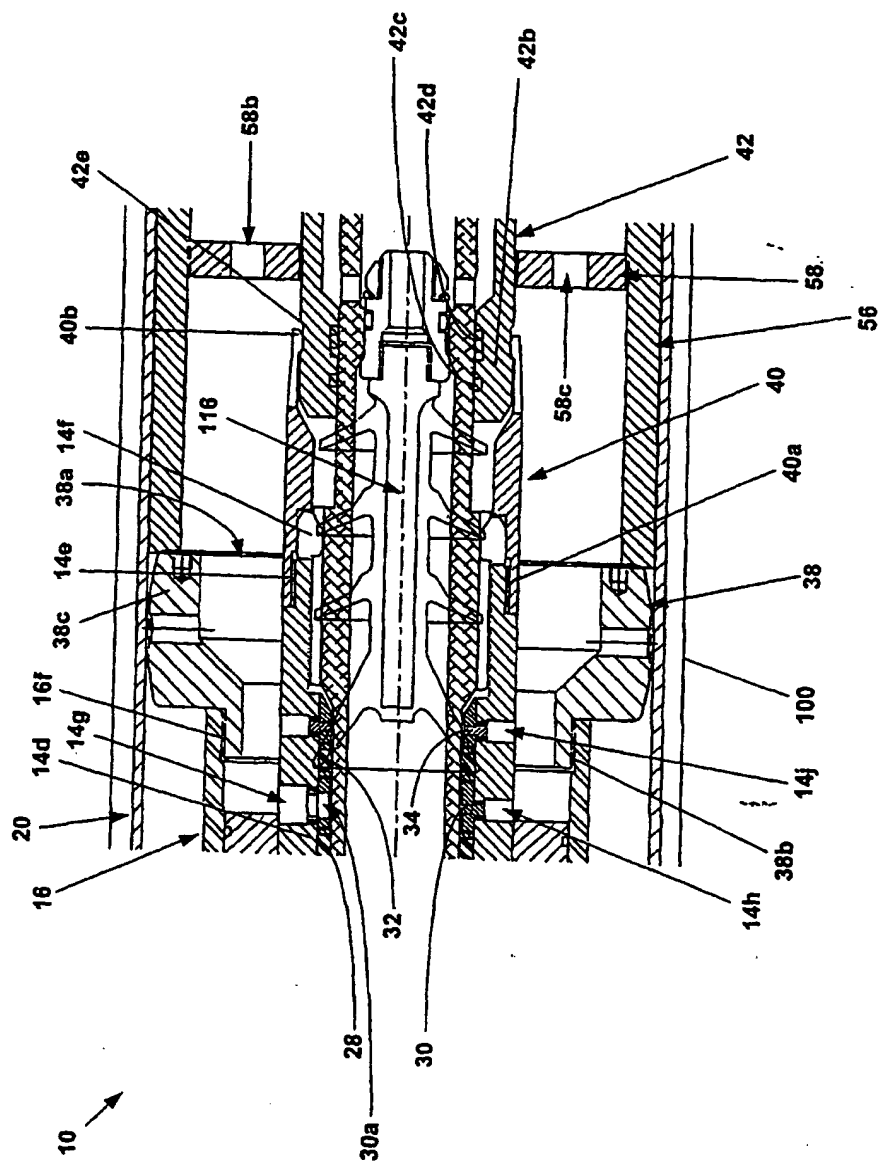


Fig. 15b

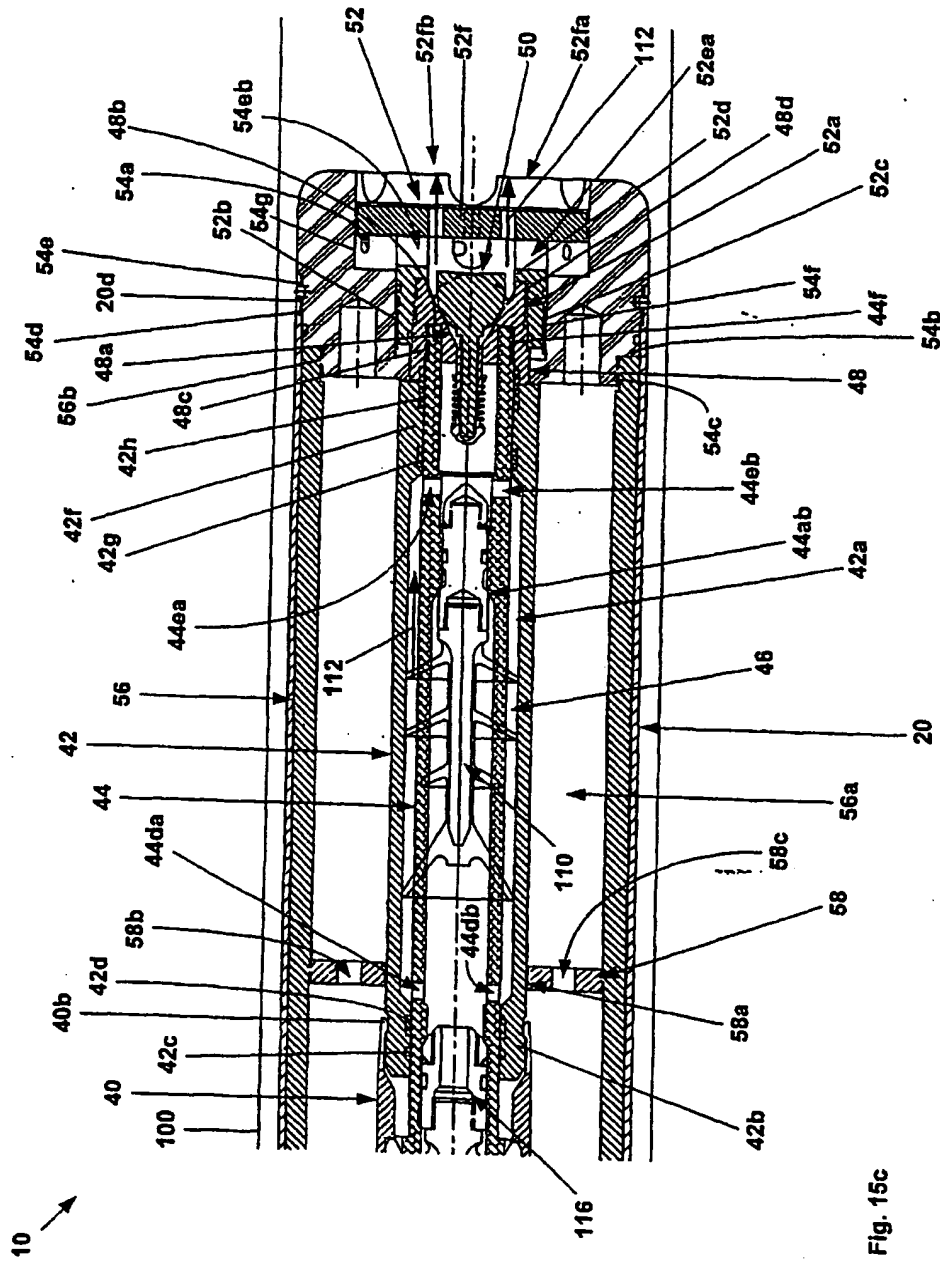


Fig. 15c



1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
84

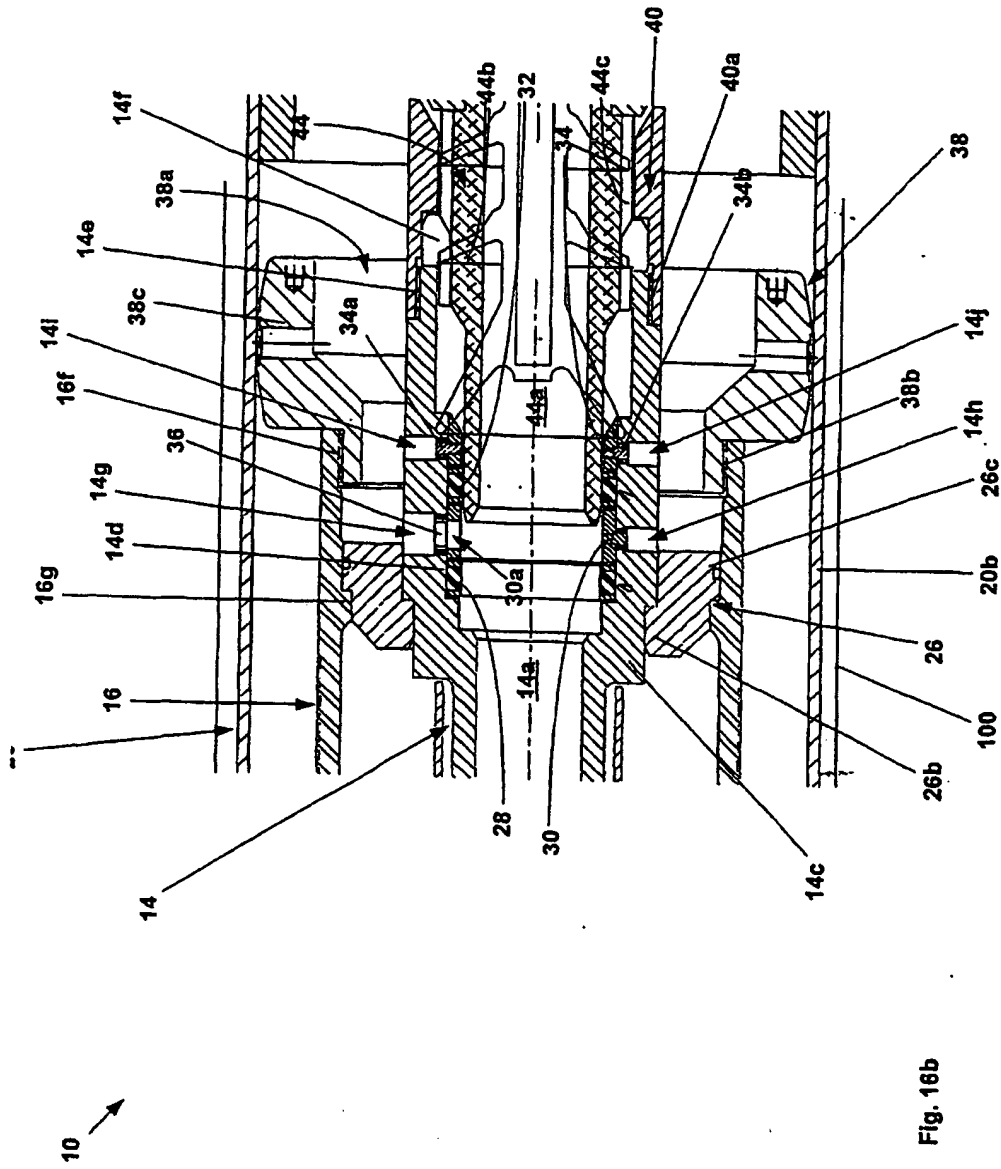
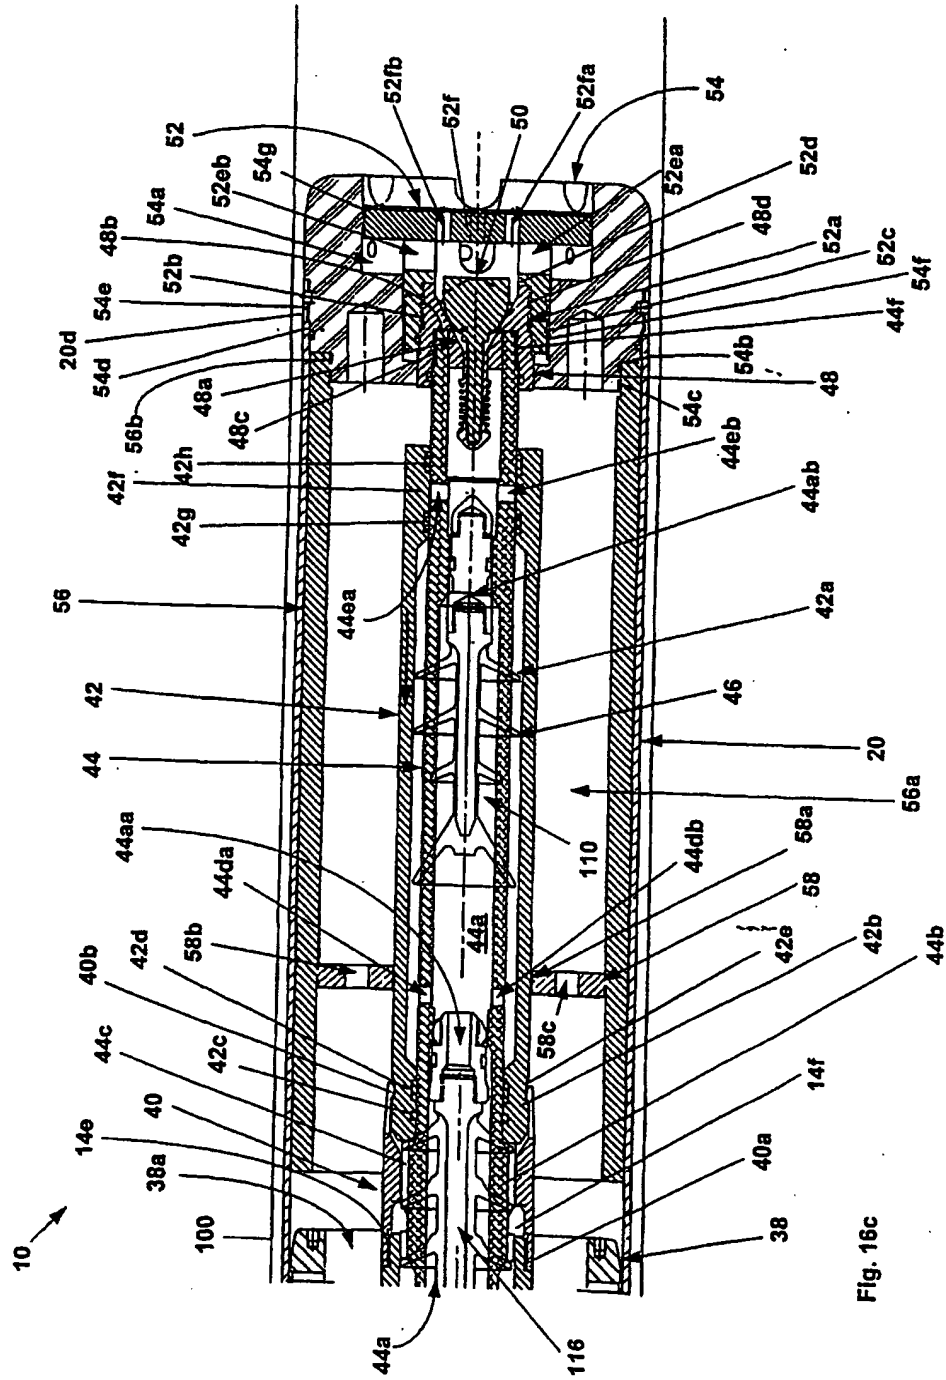


Fig. 16b



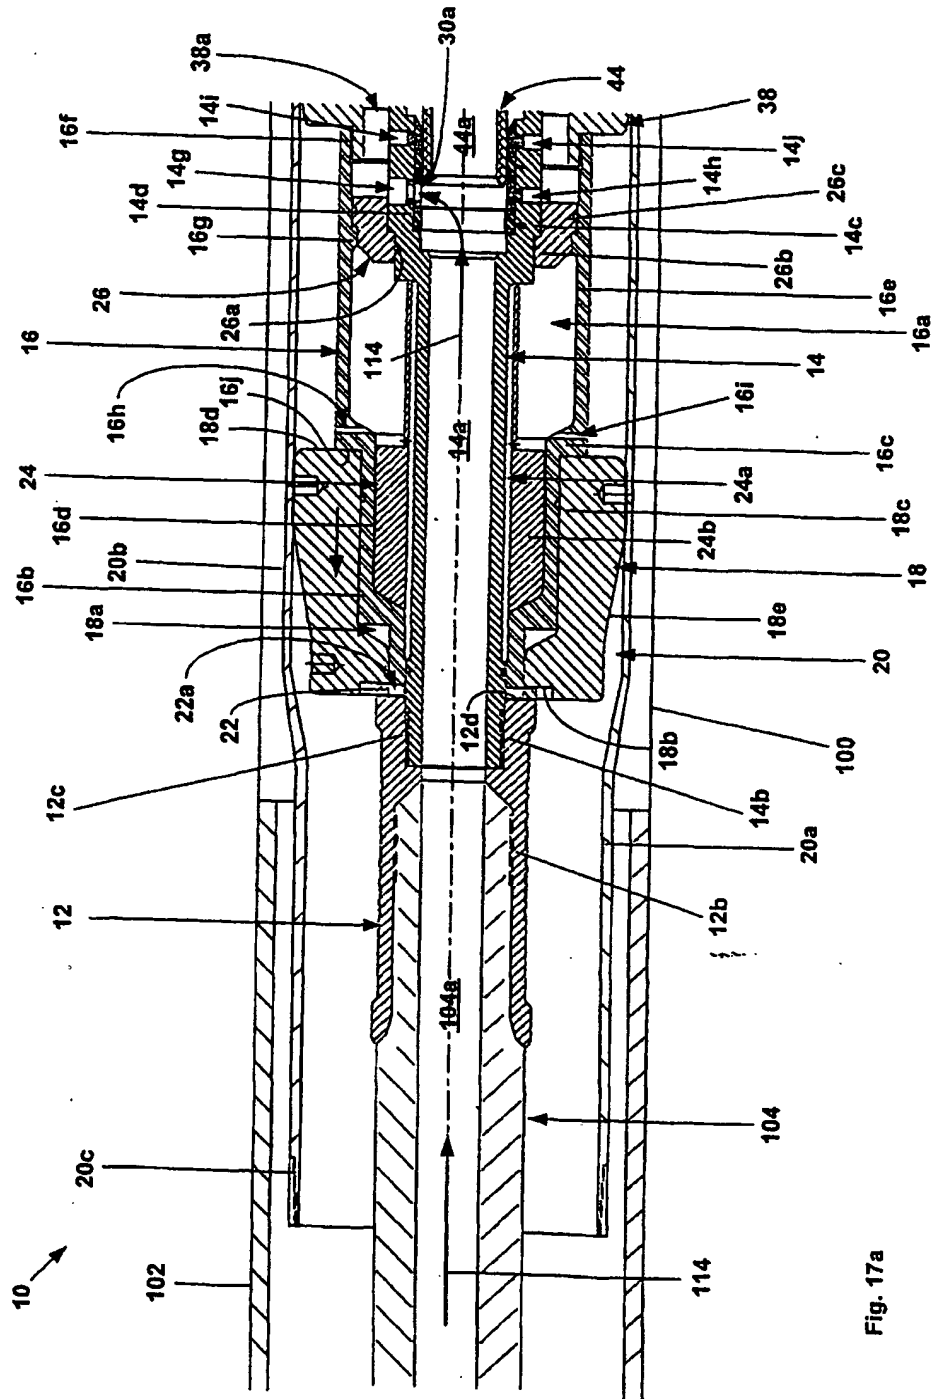
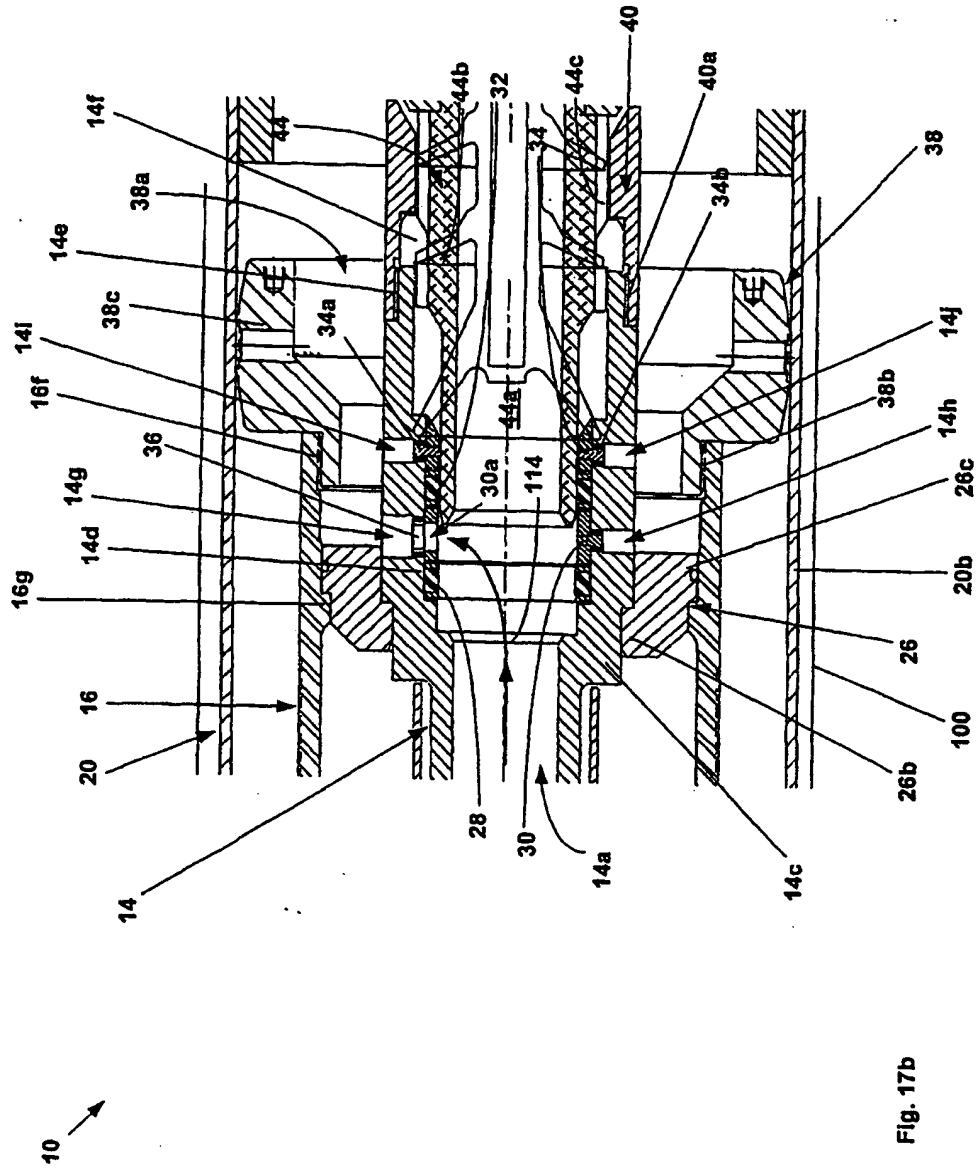


Fig. 17a



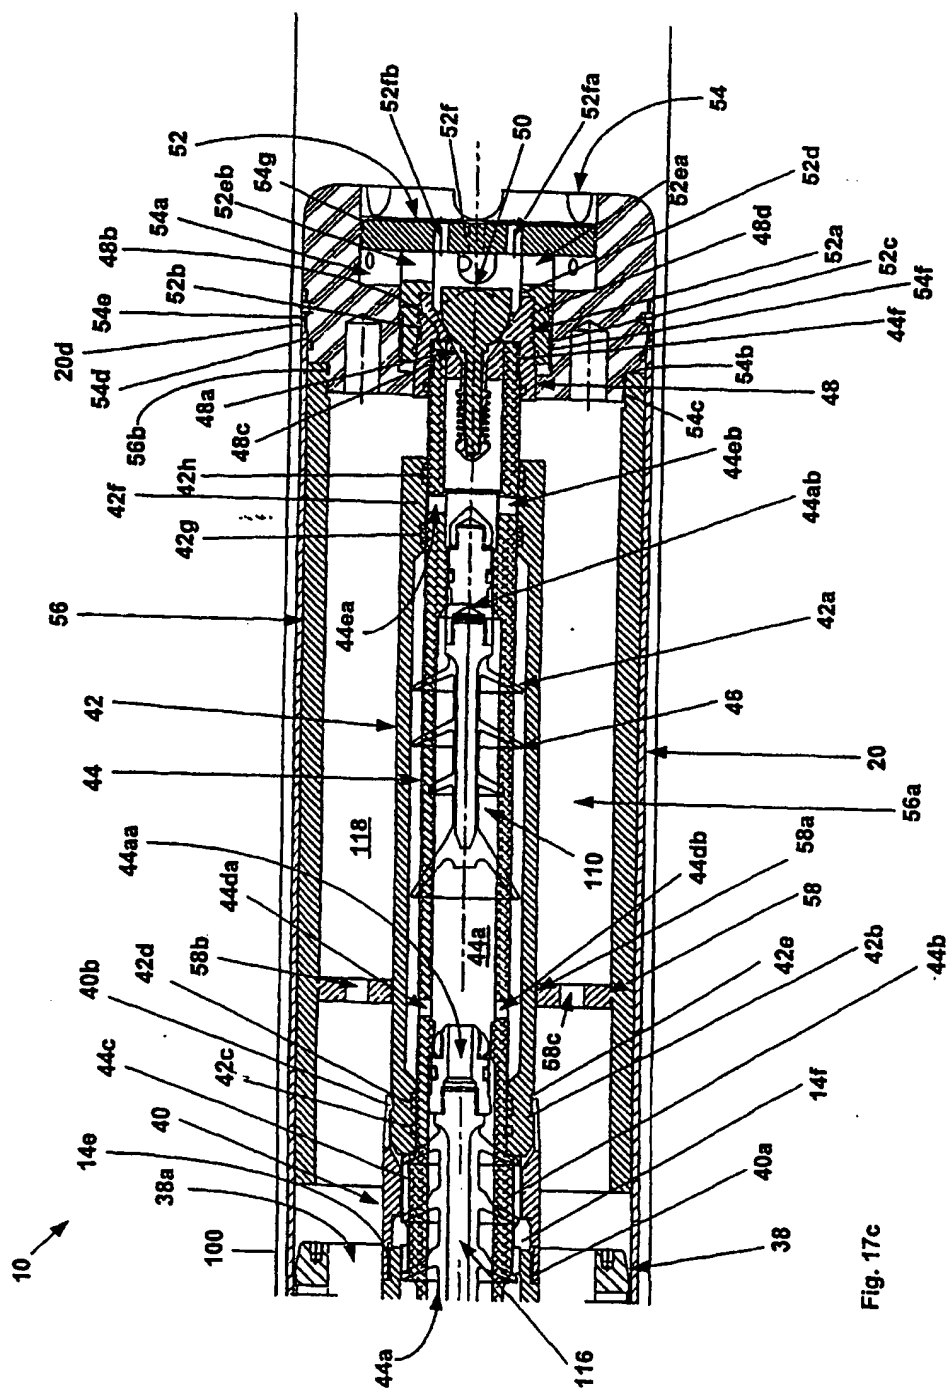


Fig. 17c

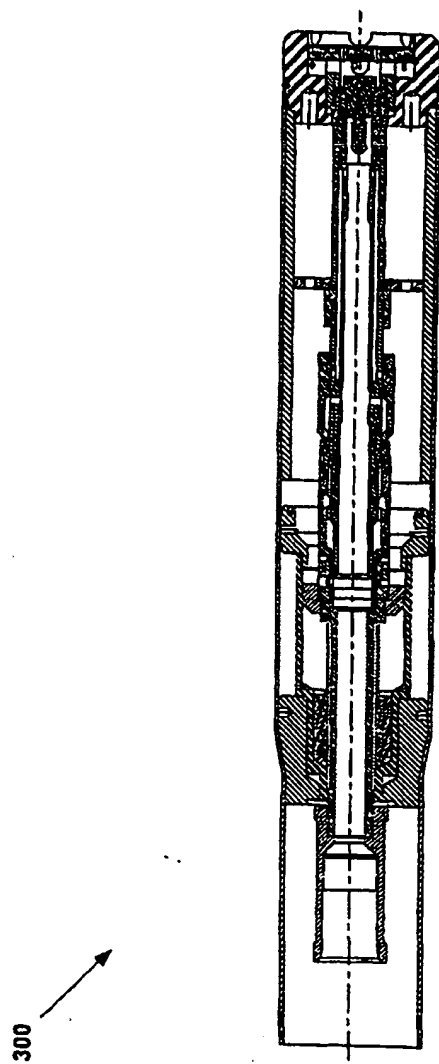


Fig. 18

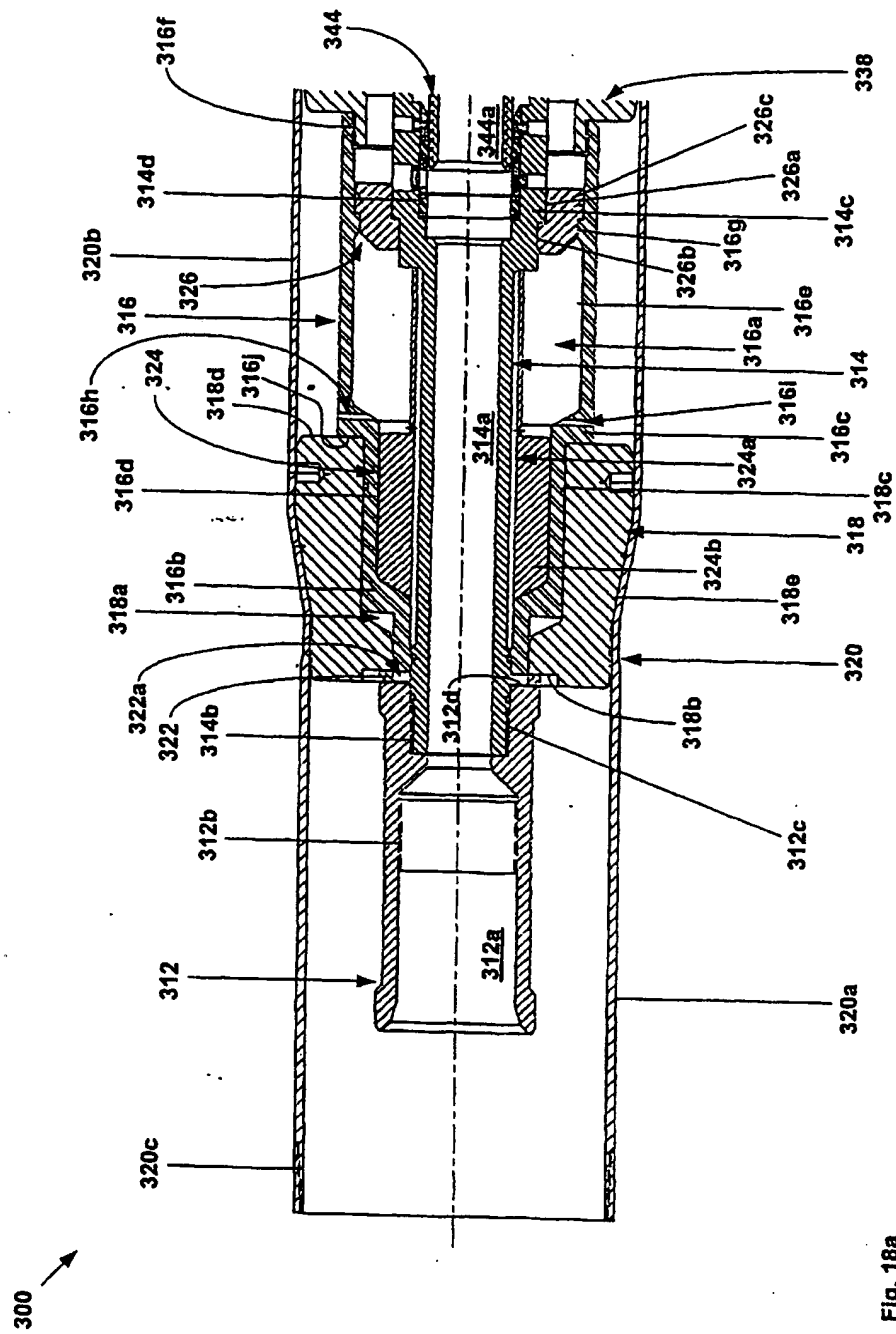




Fig. 18b

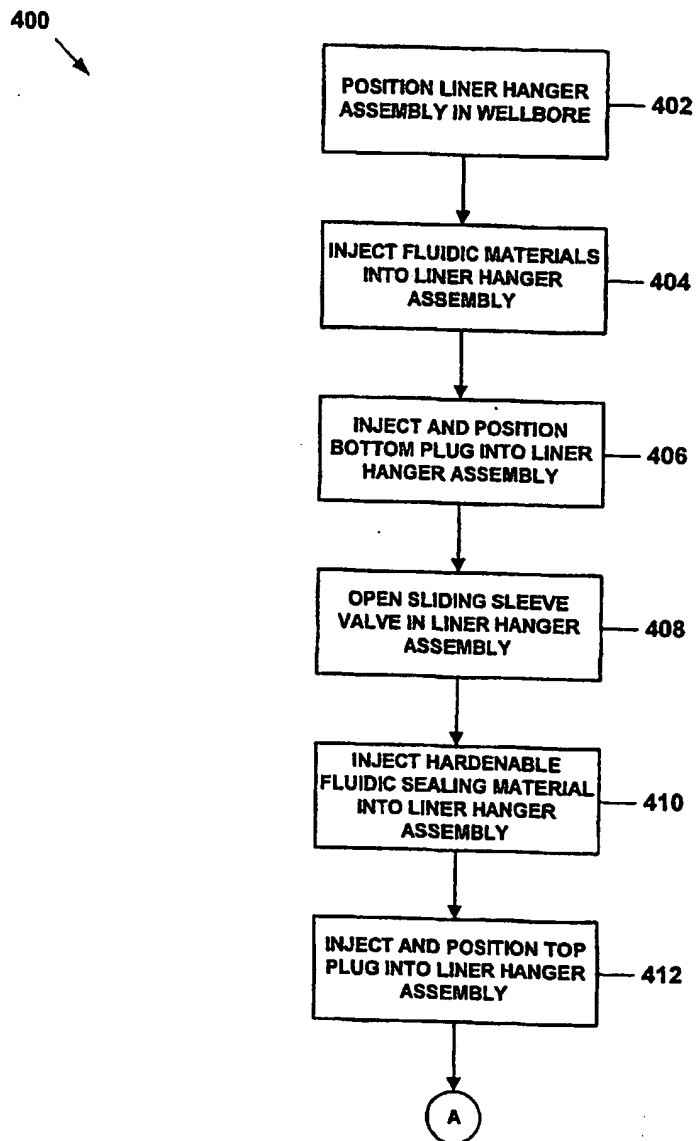


Fig. 19a

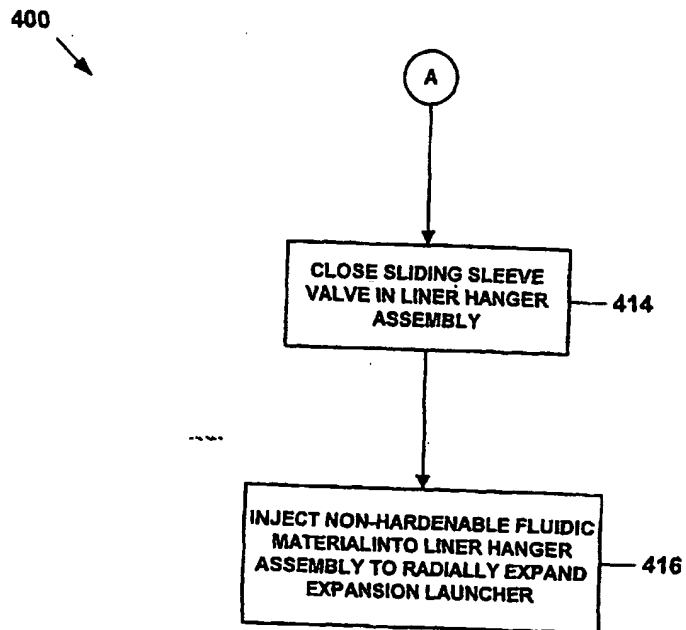
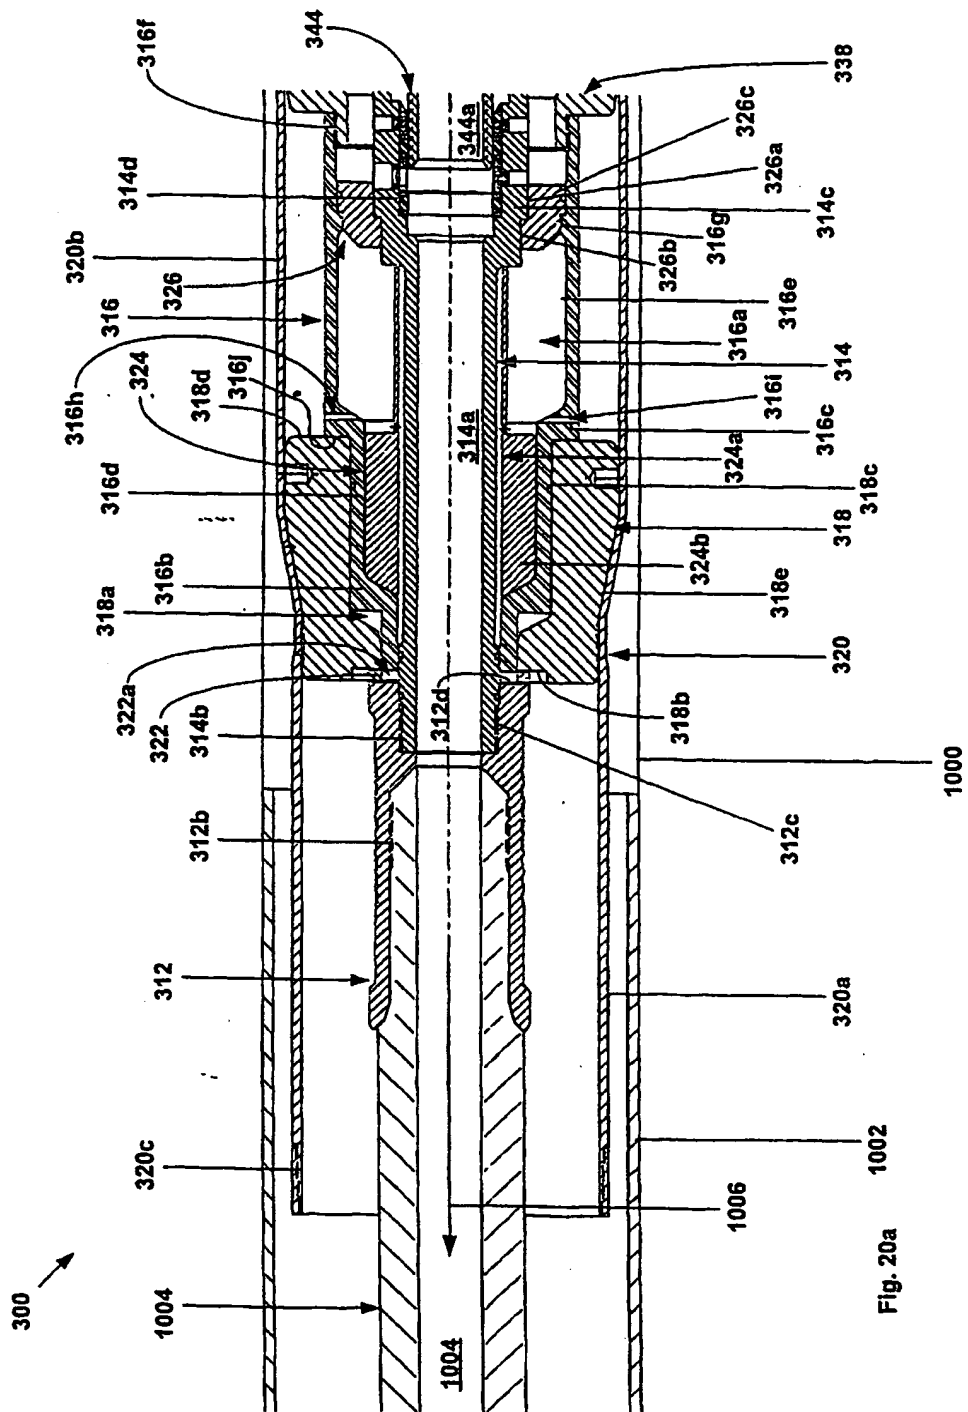
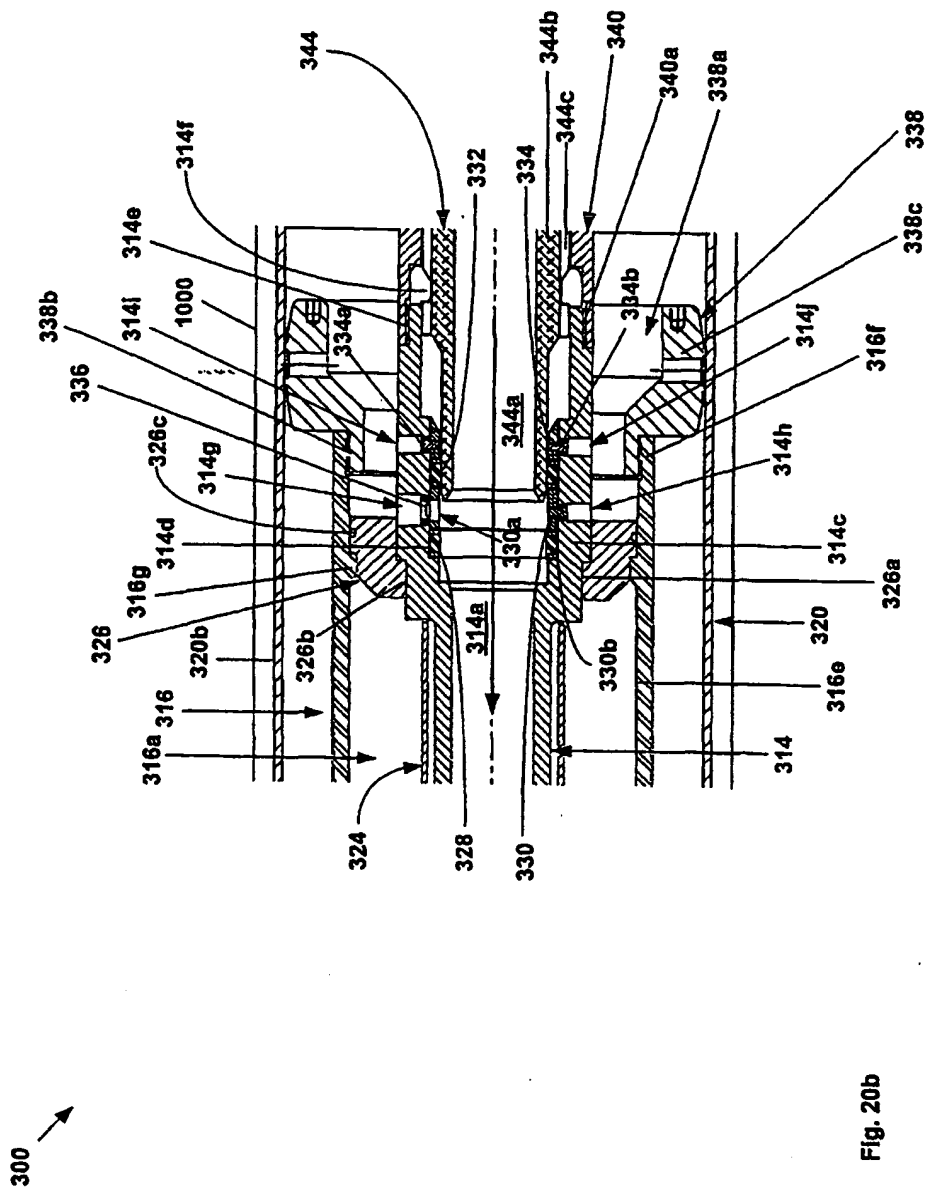


Fig. 19b





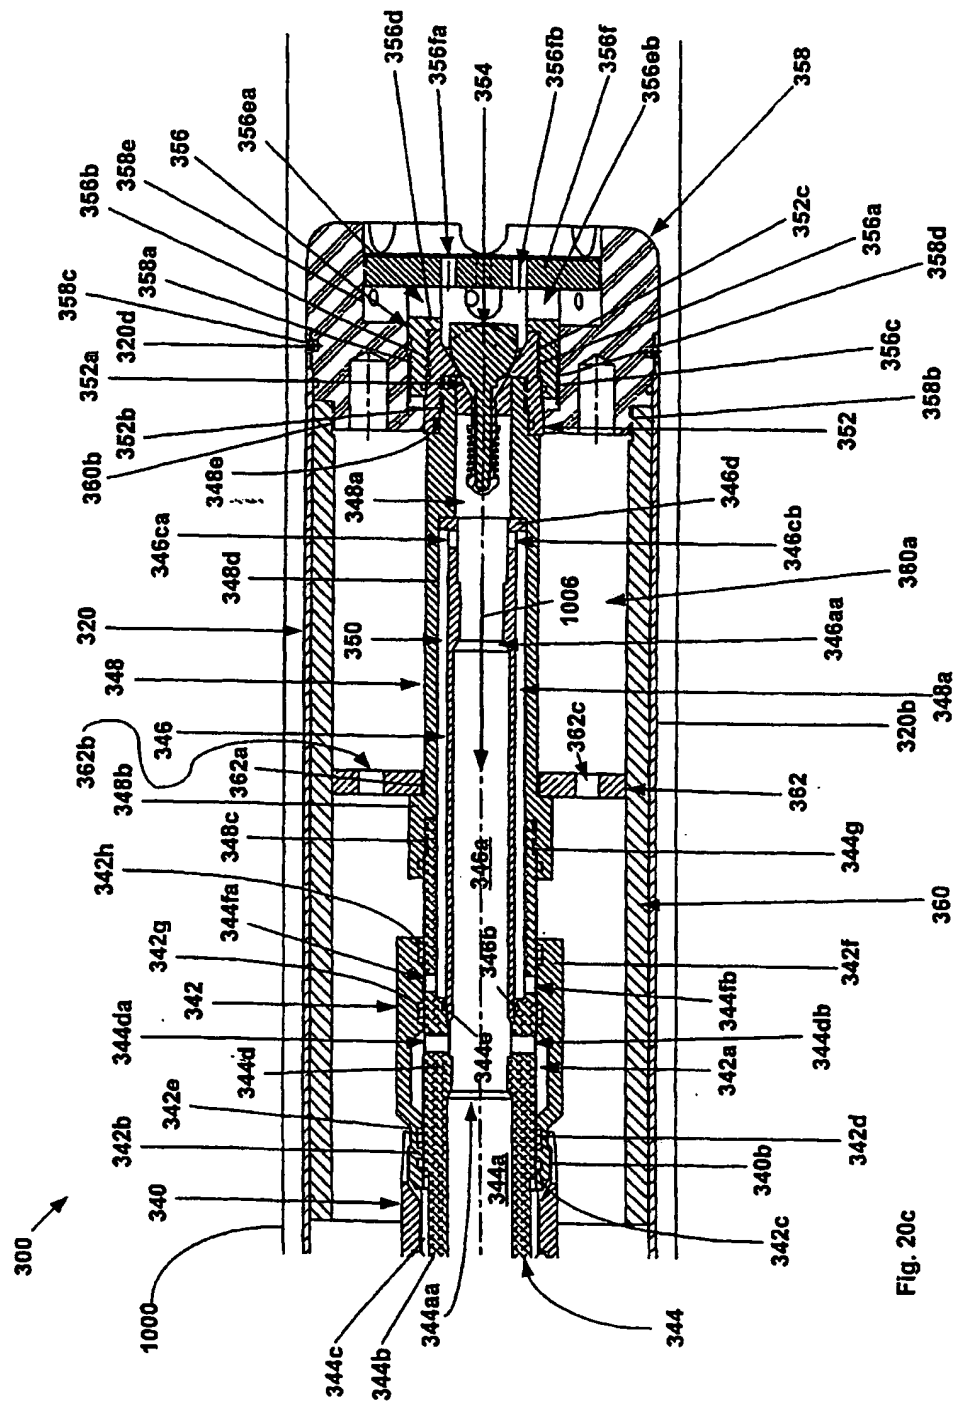


Fig. 20c

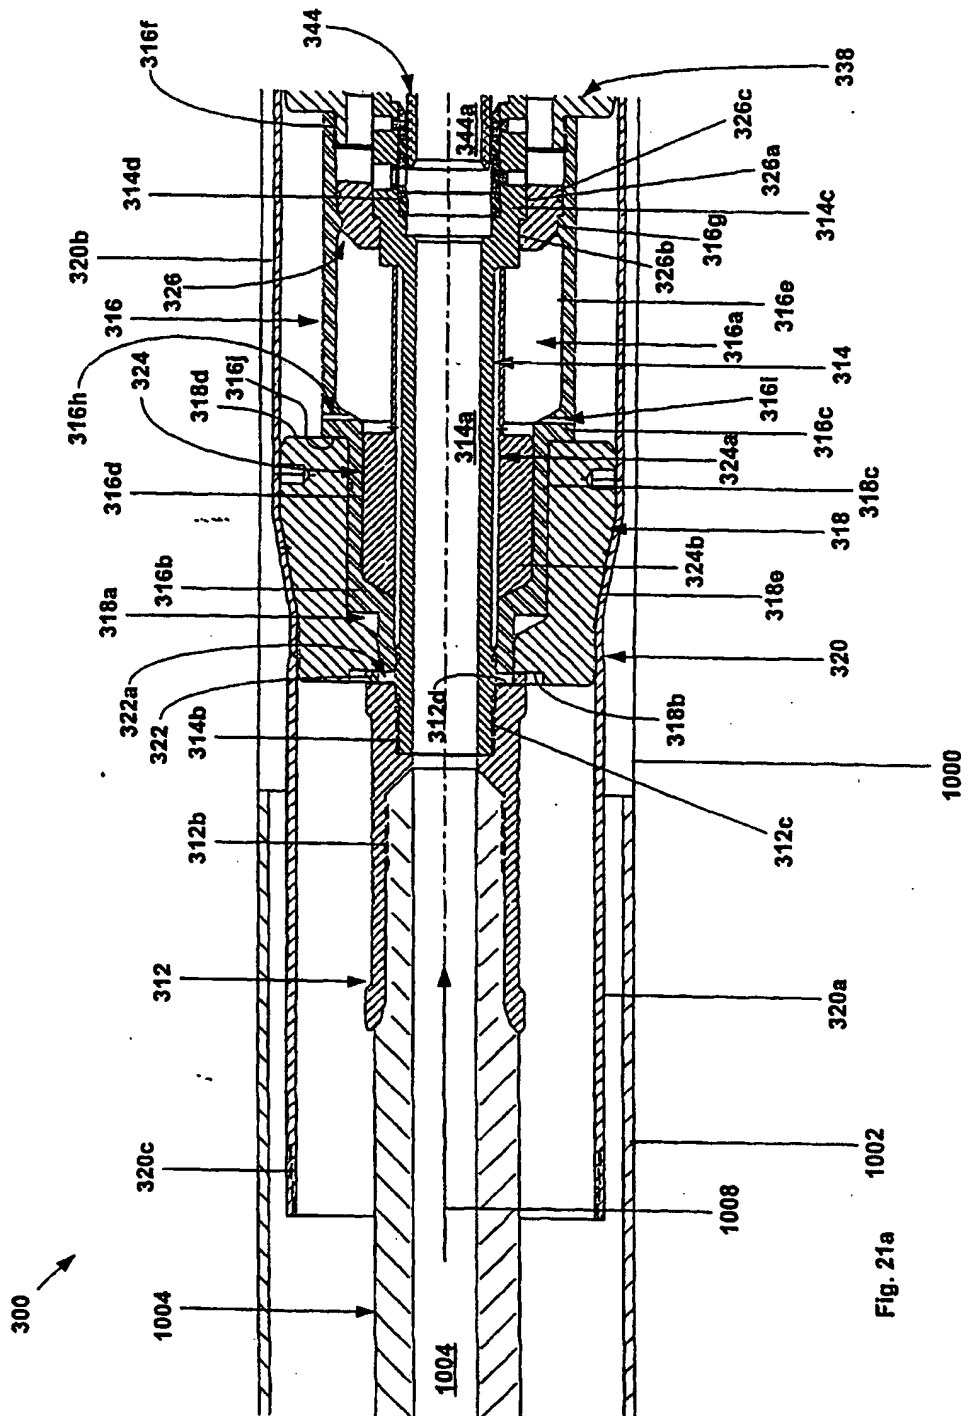
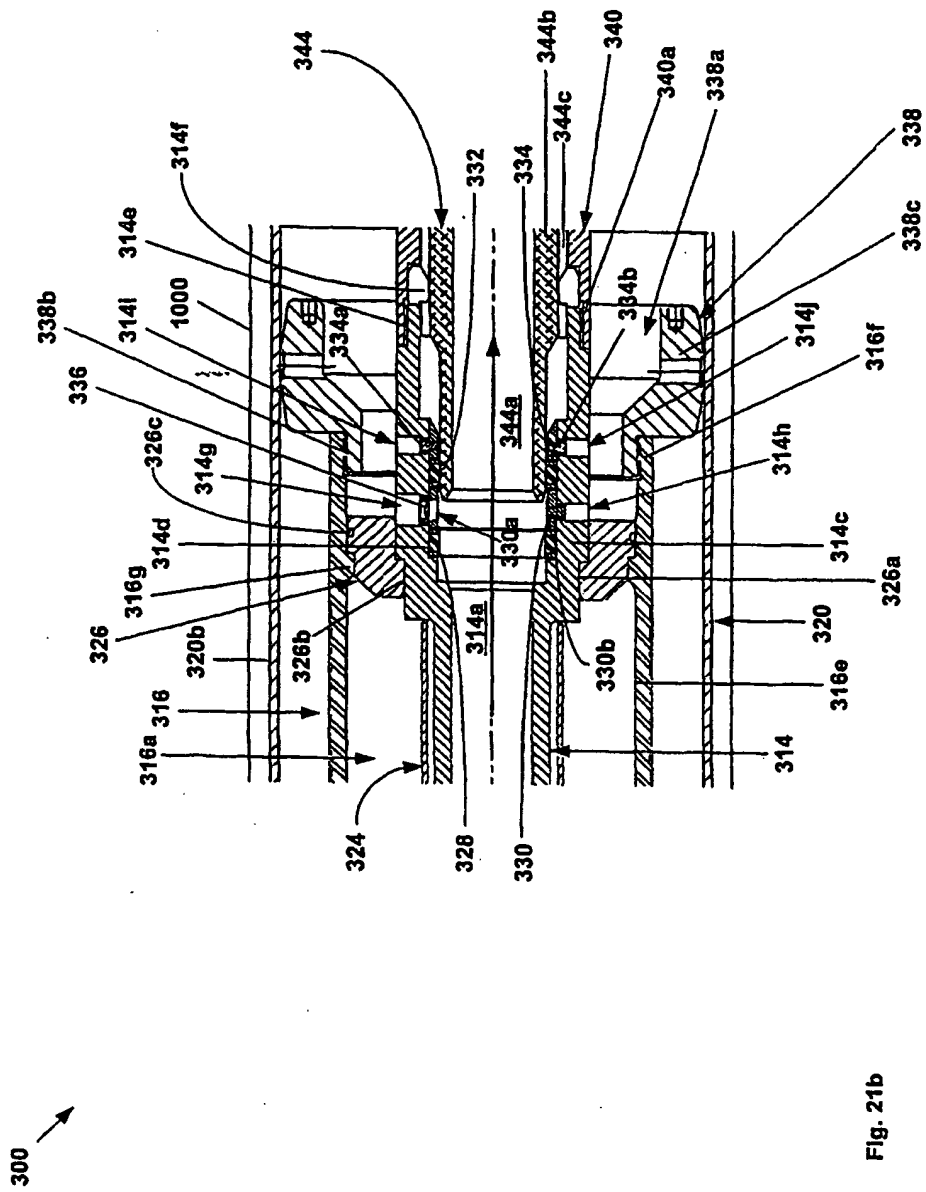


Fig. 21a



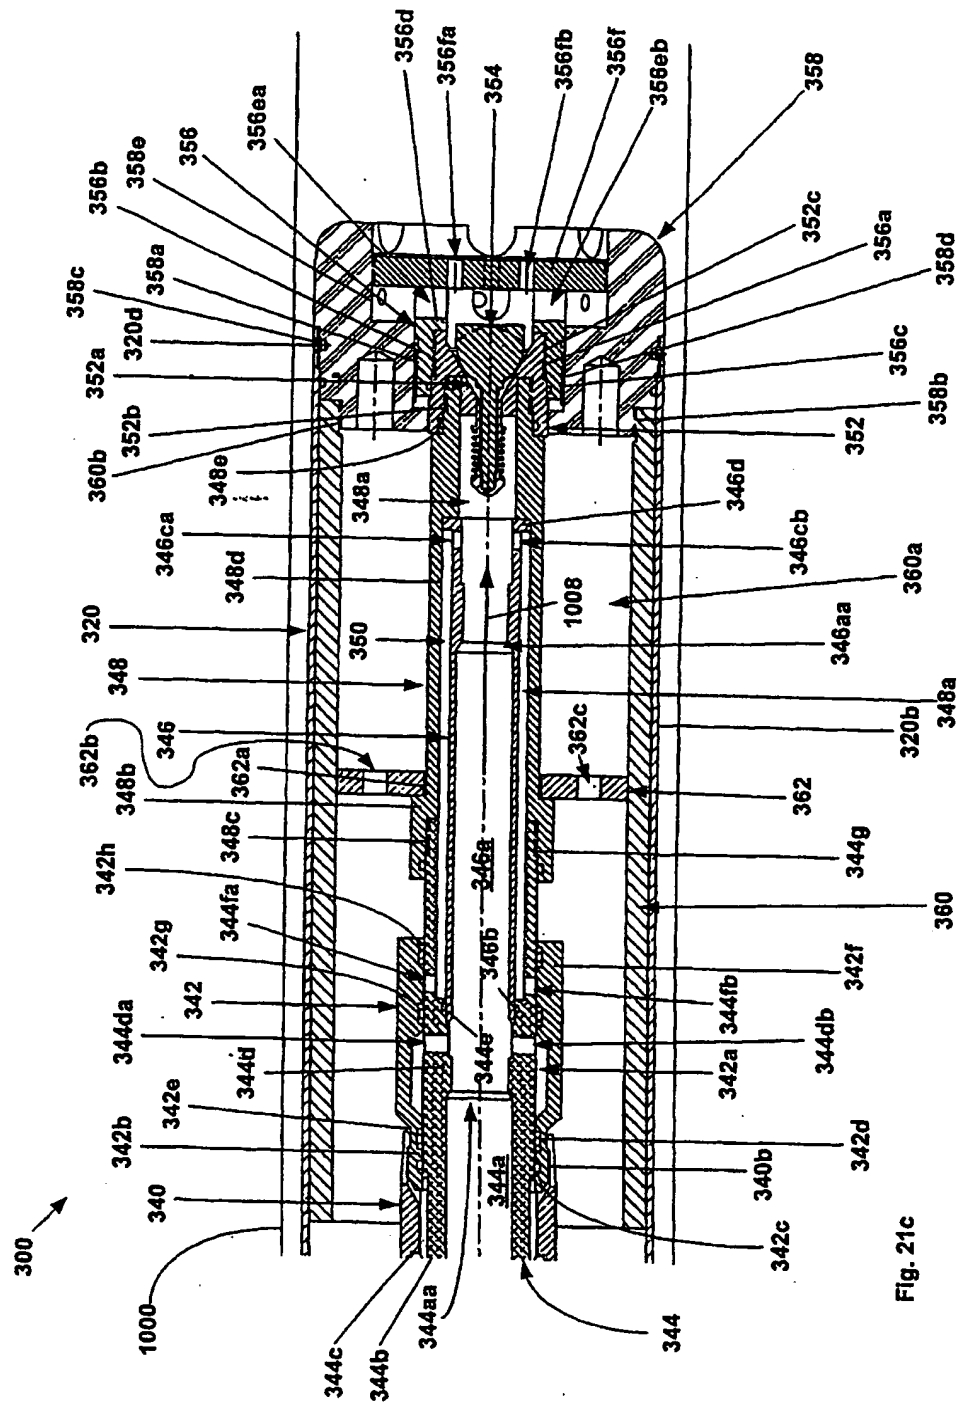


Fig. 21c

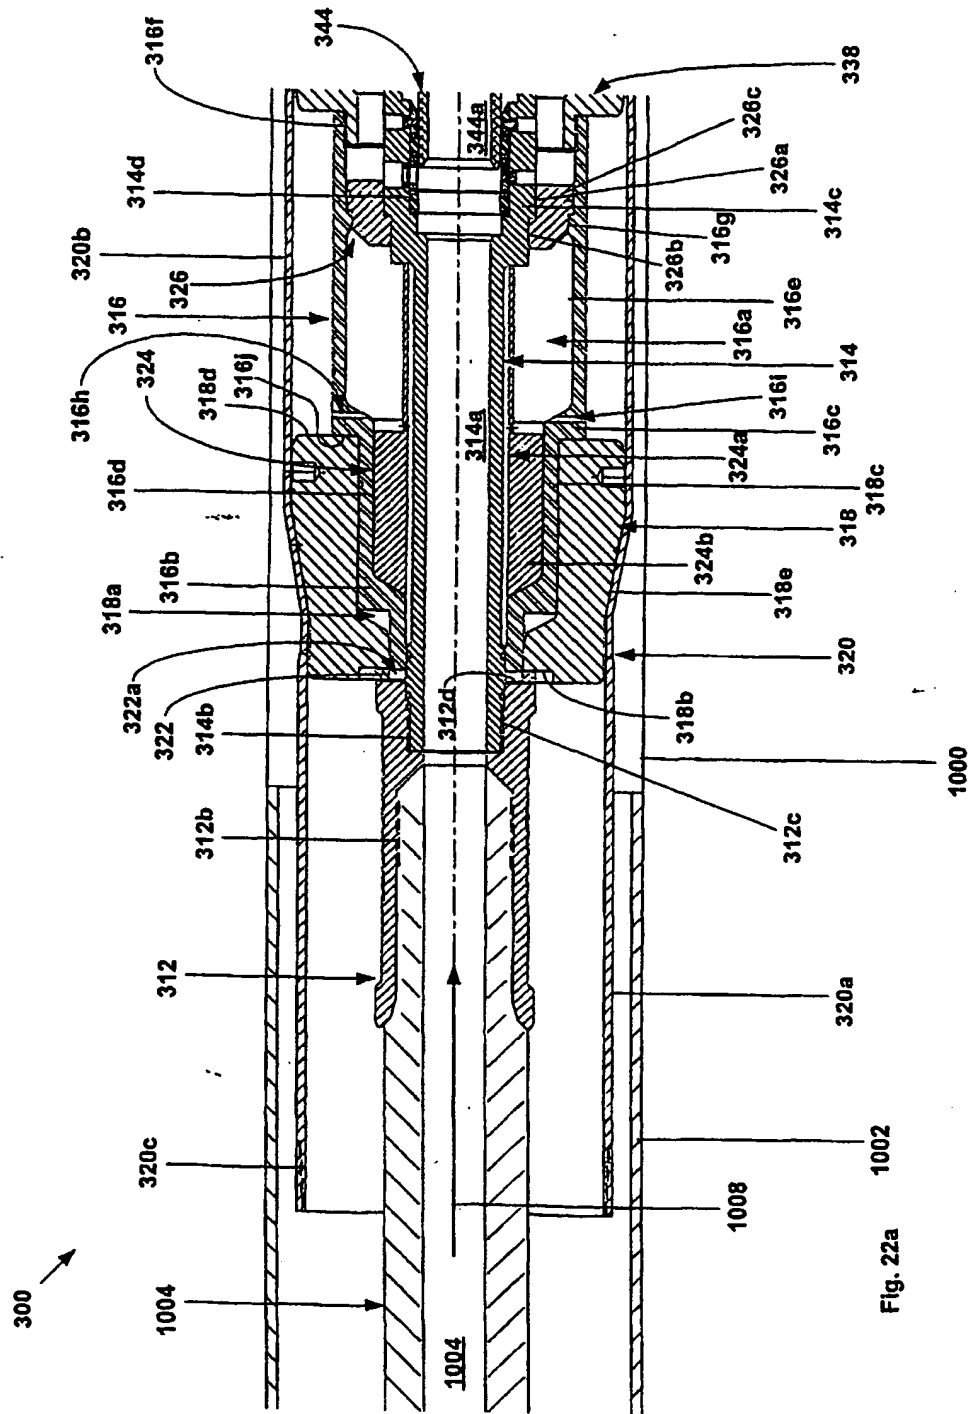
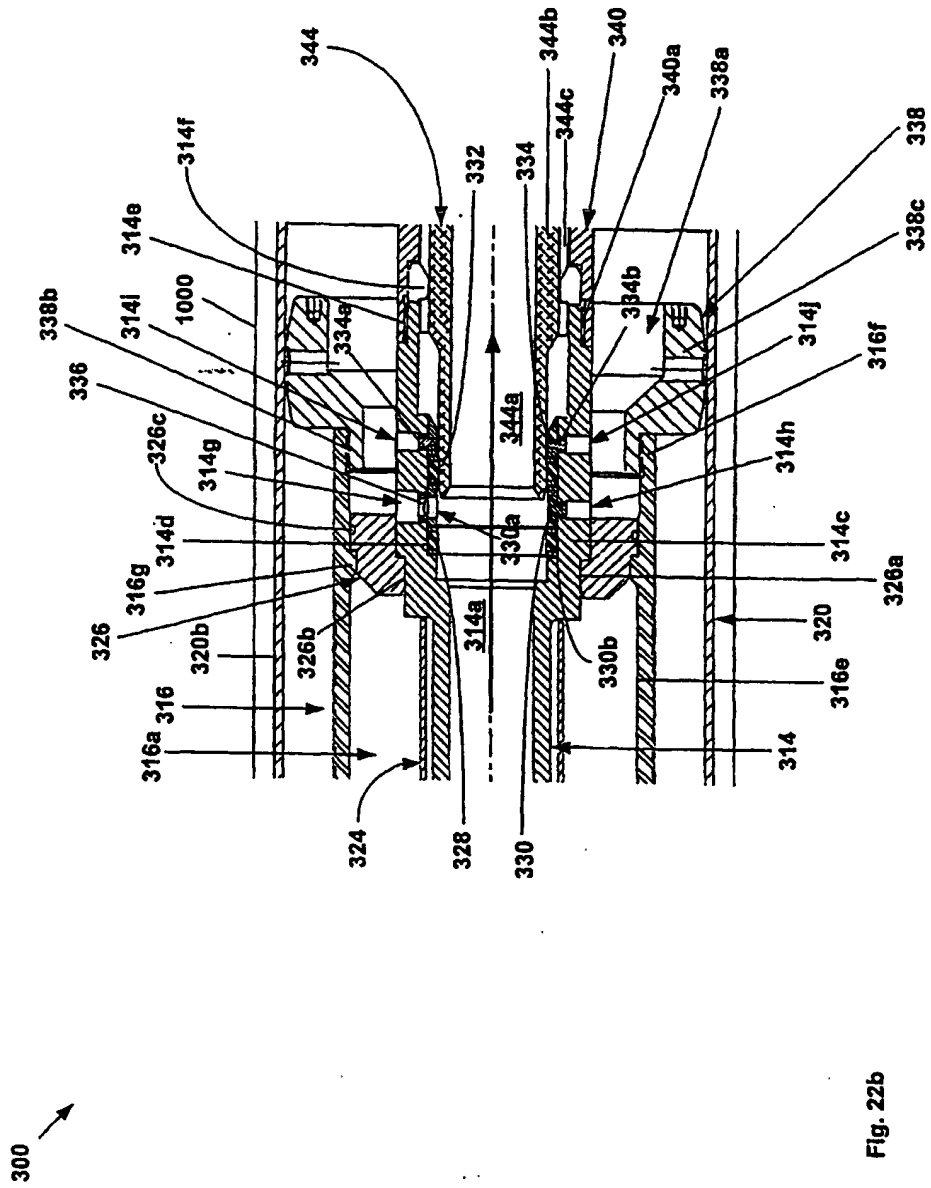


Fig. 22a



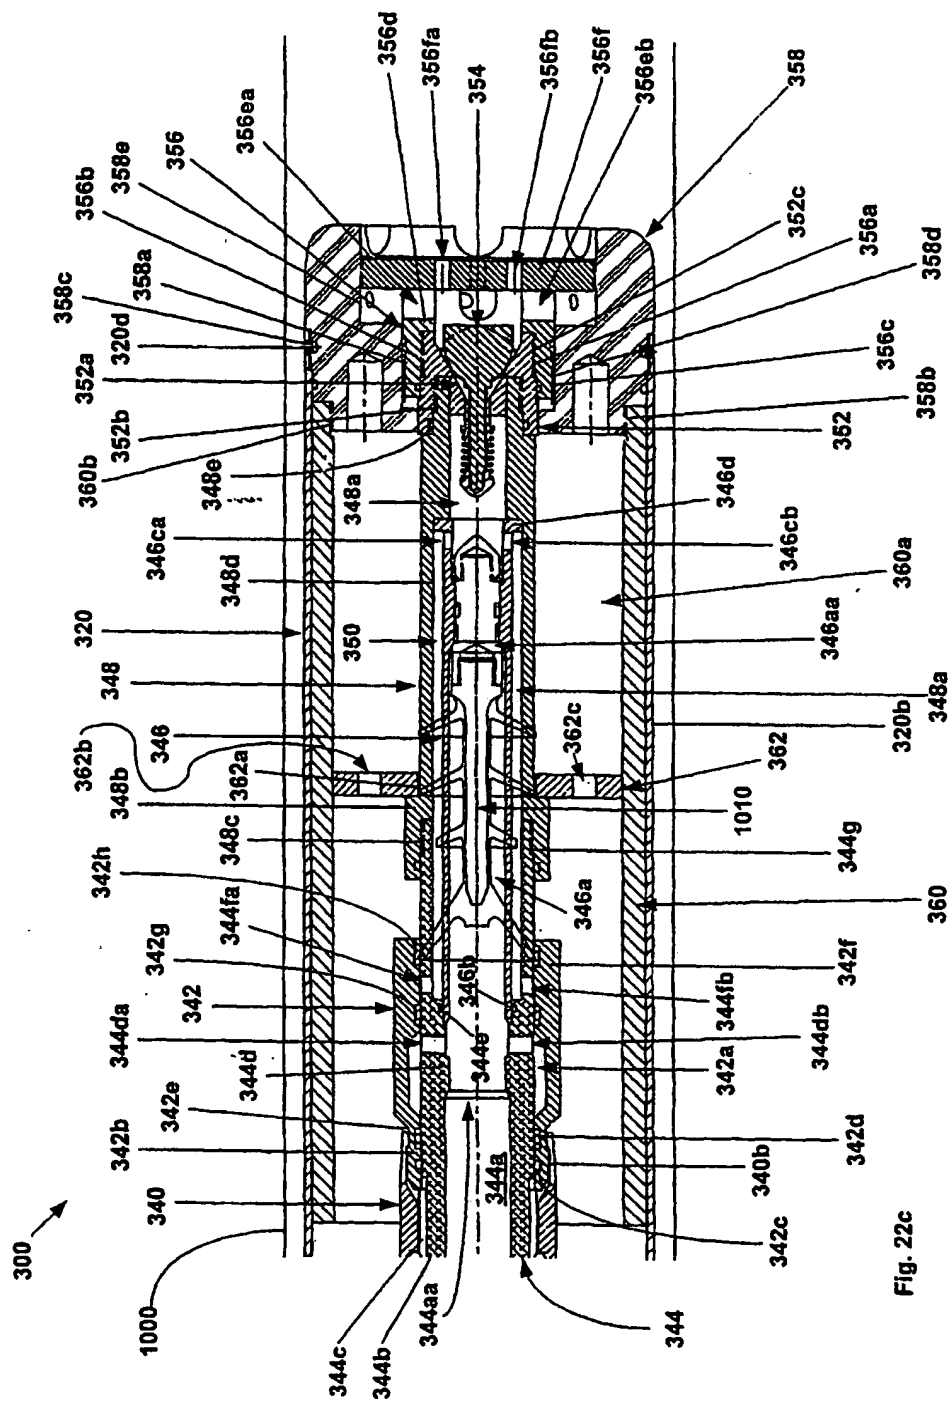


Fig. 22c

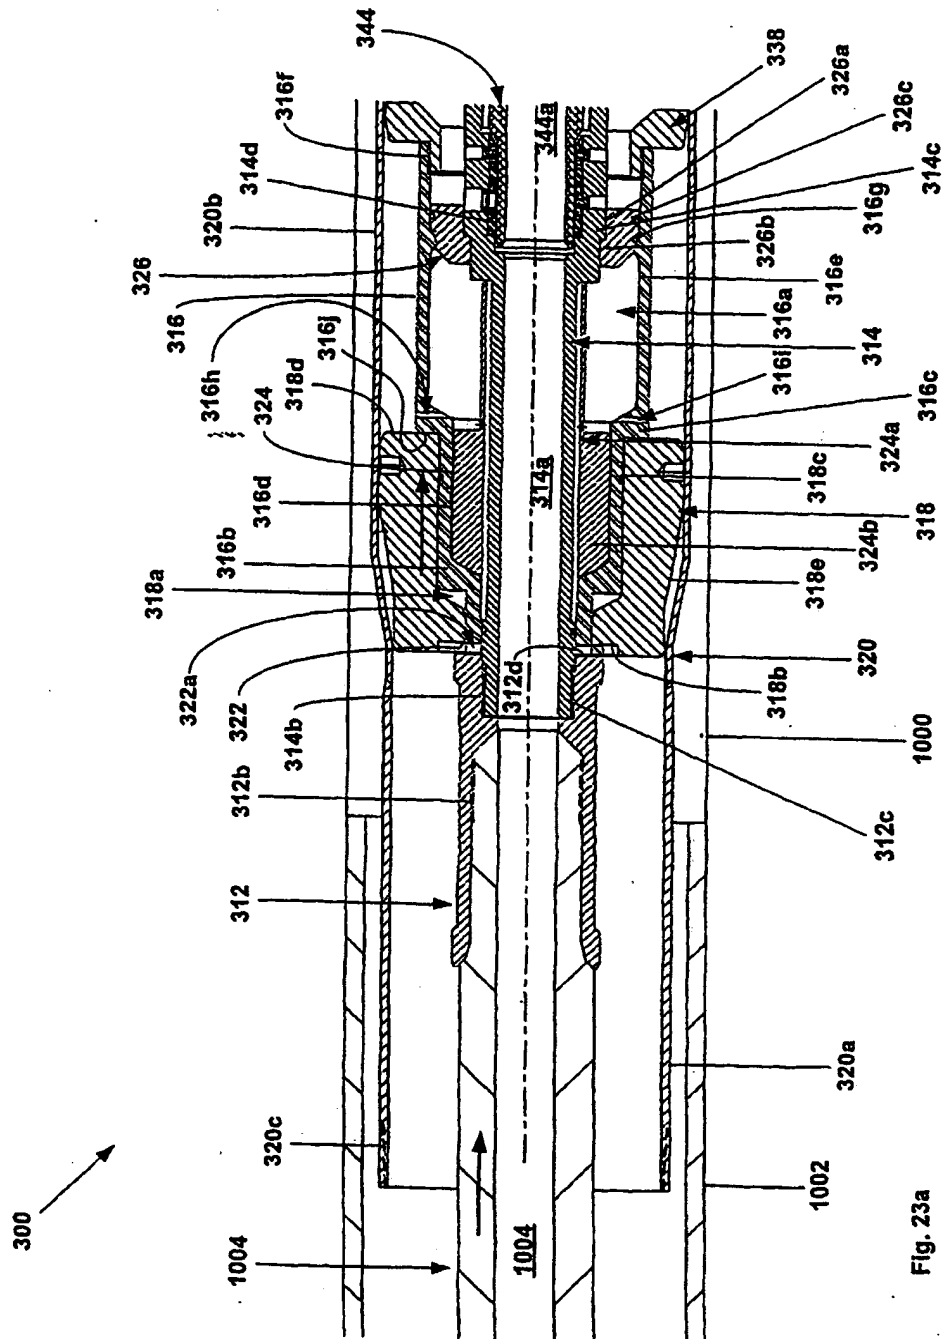


Fig. 23a

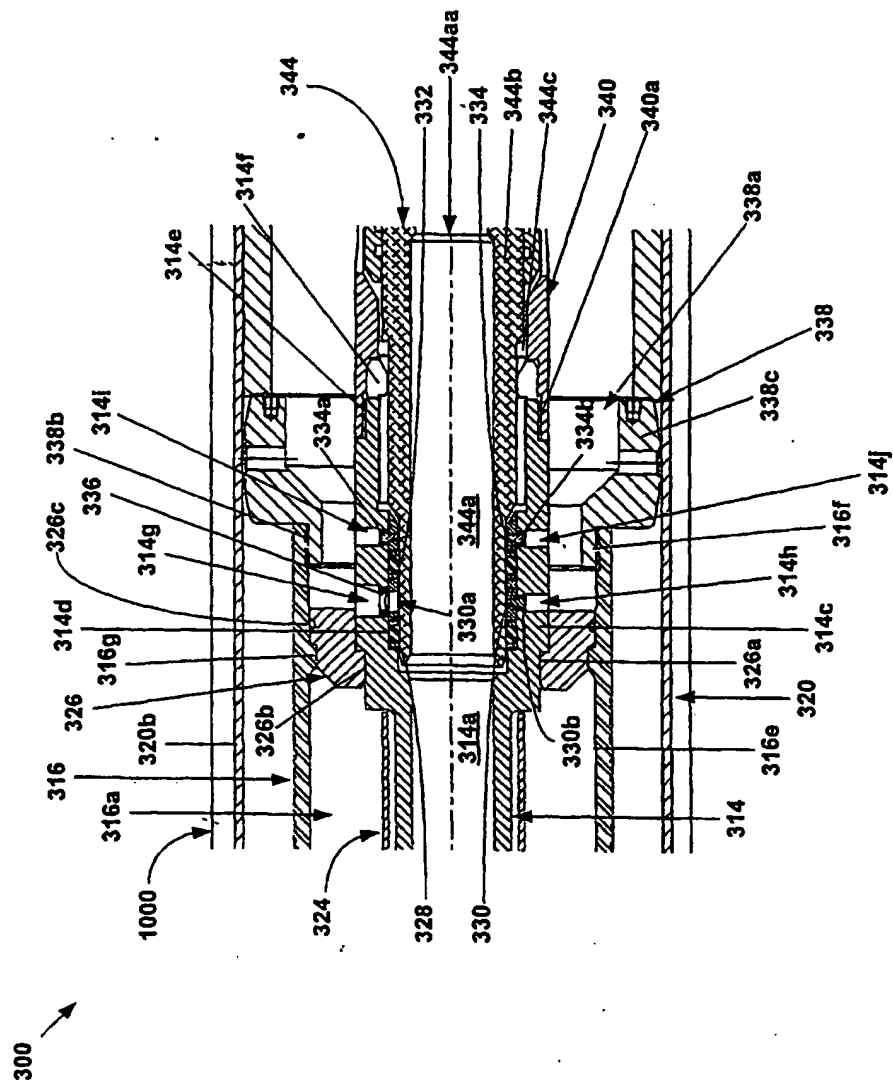


Fig. 23b

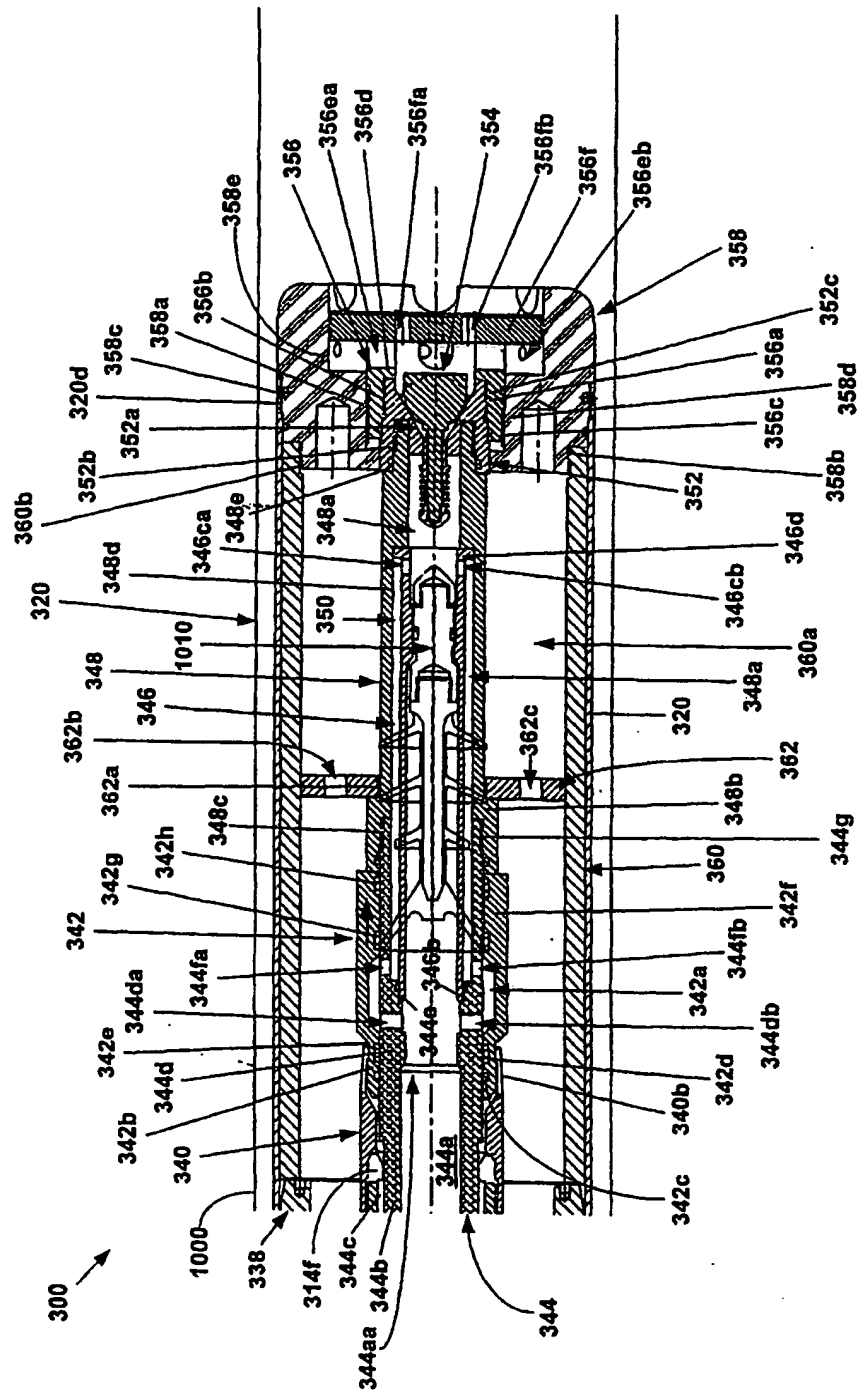


Fig. 23c

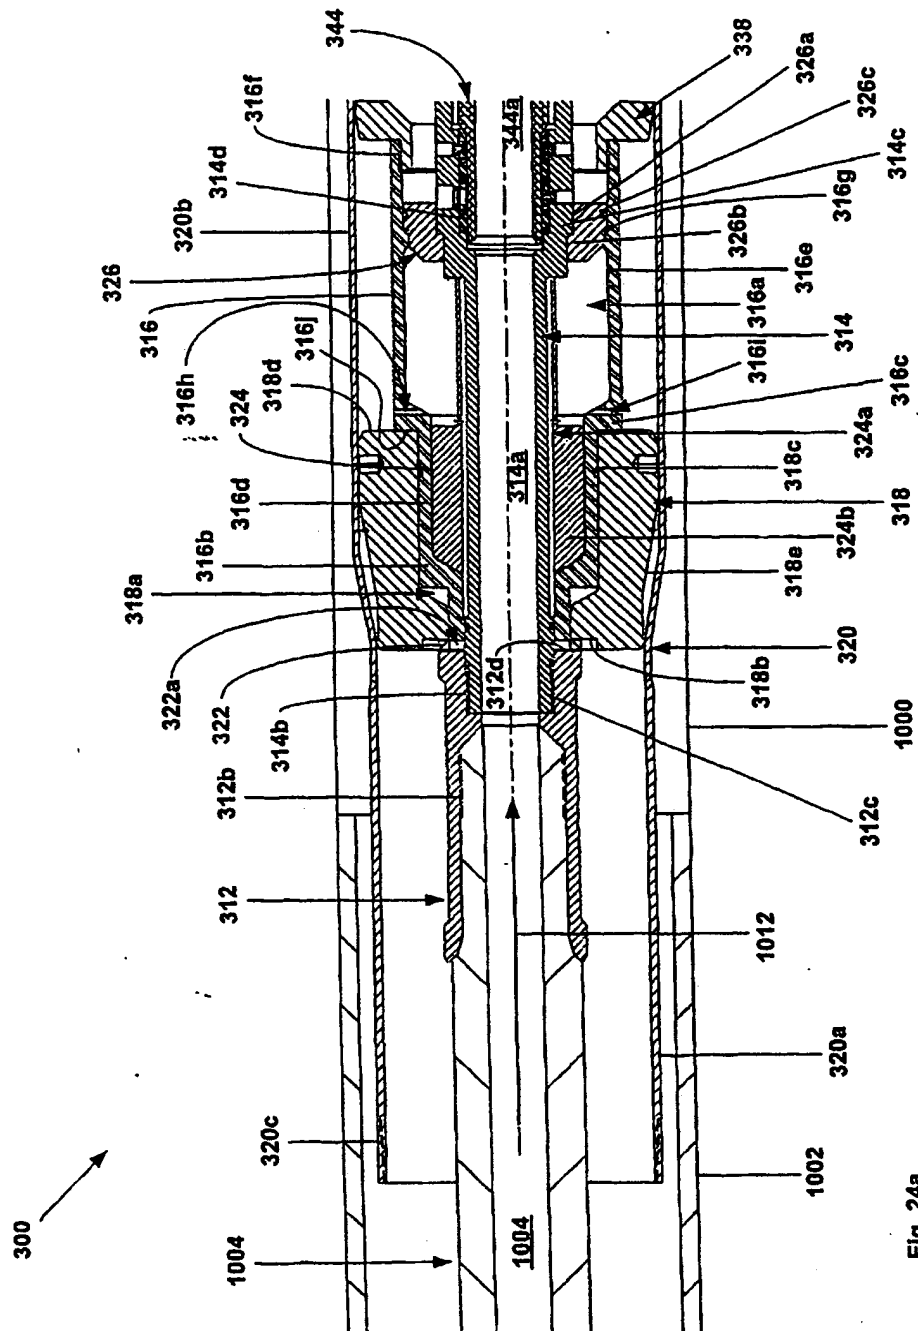


Fig. 24a

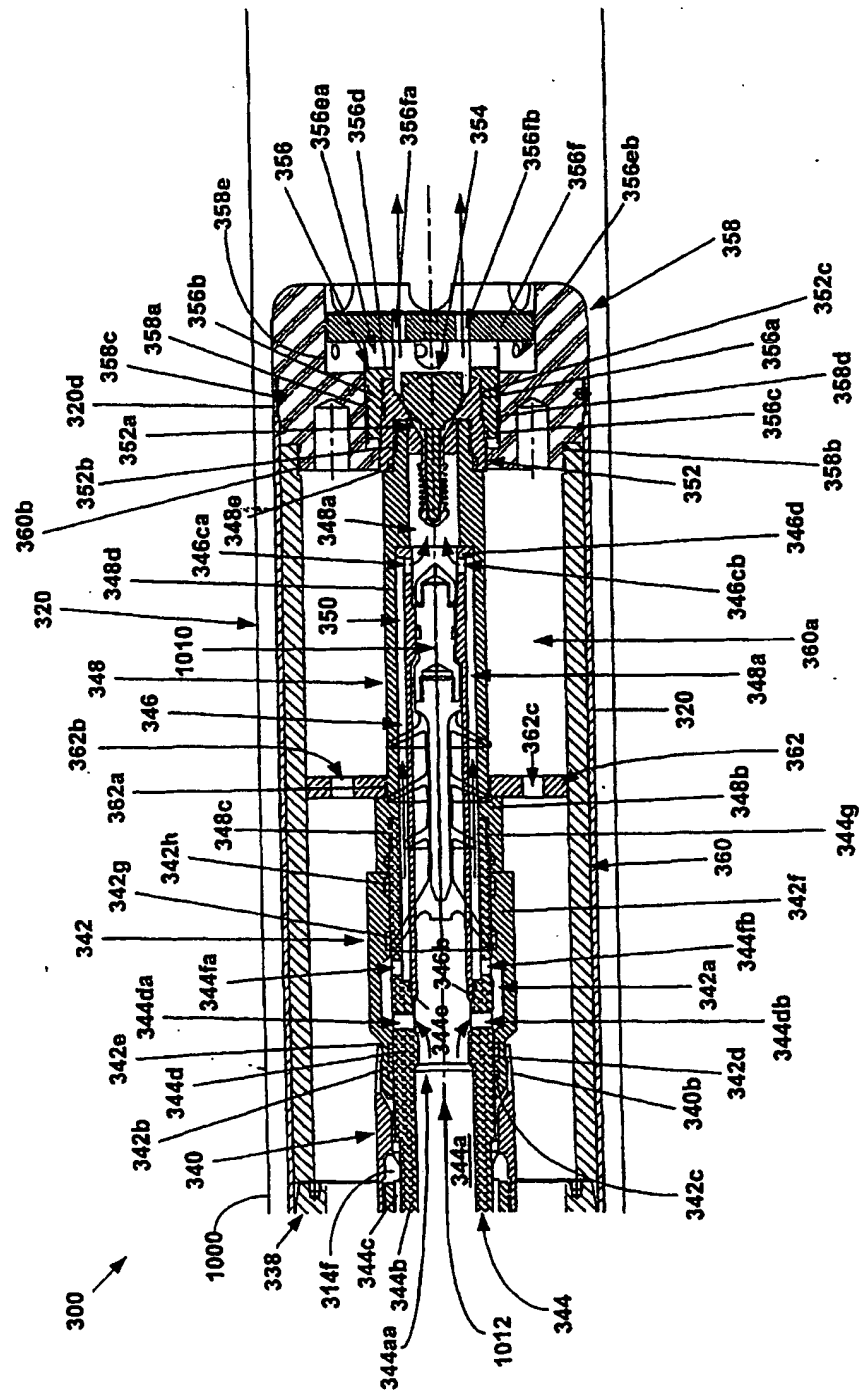


Fig. 24c

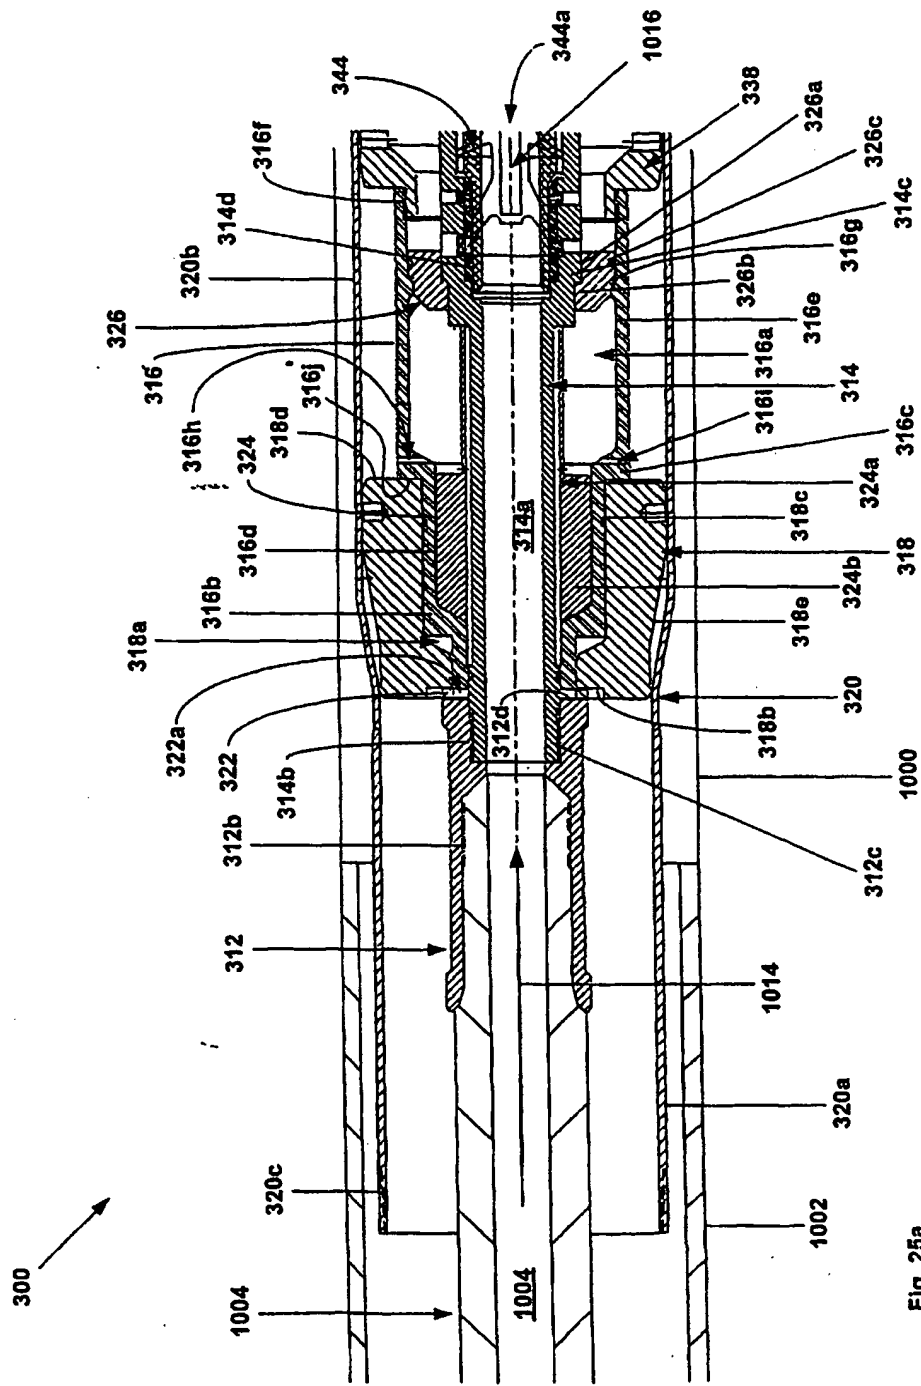
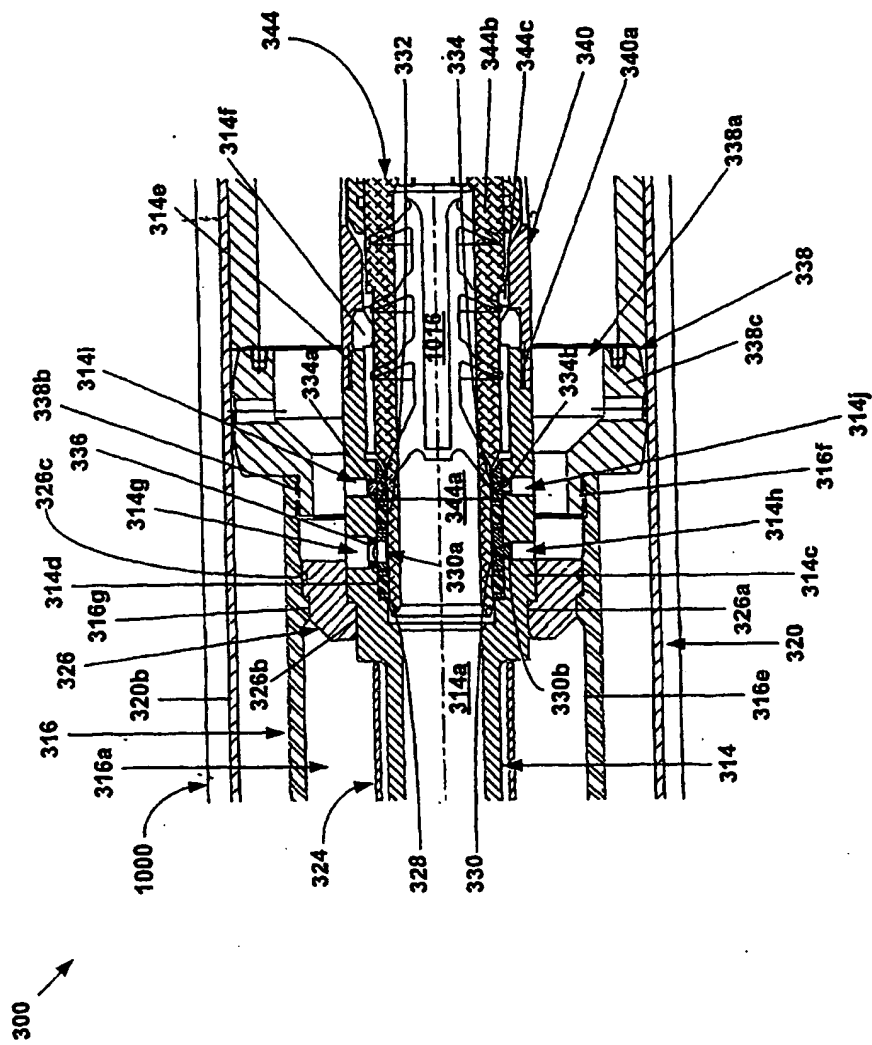


Fig. 25a



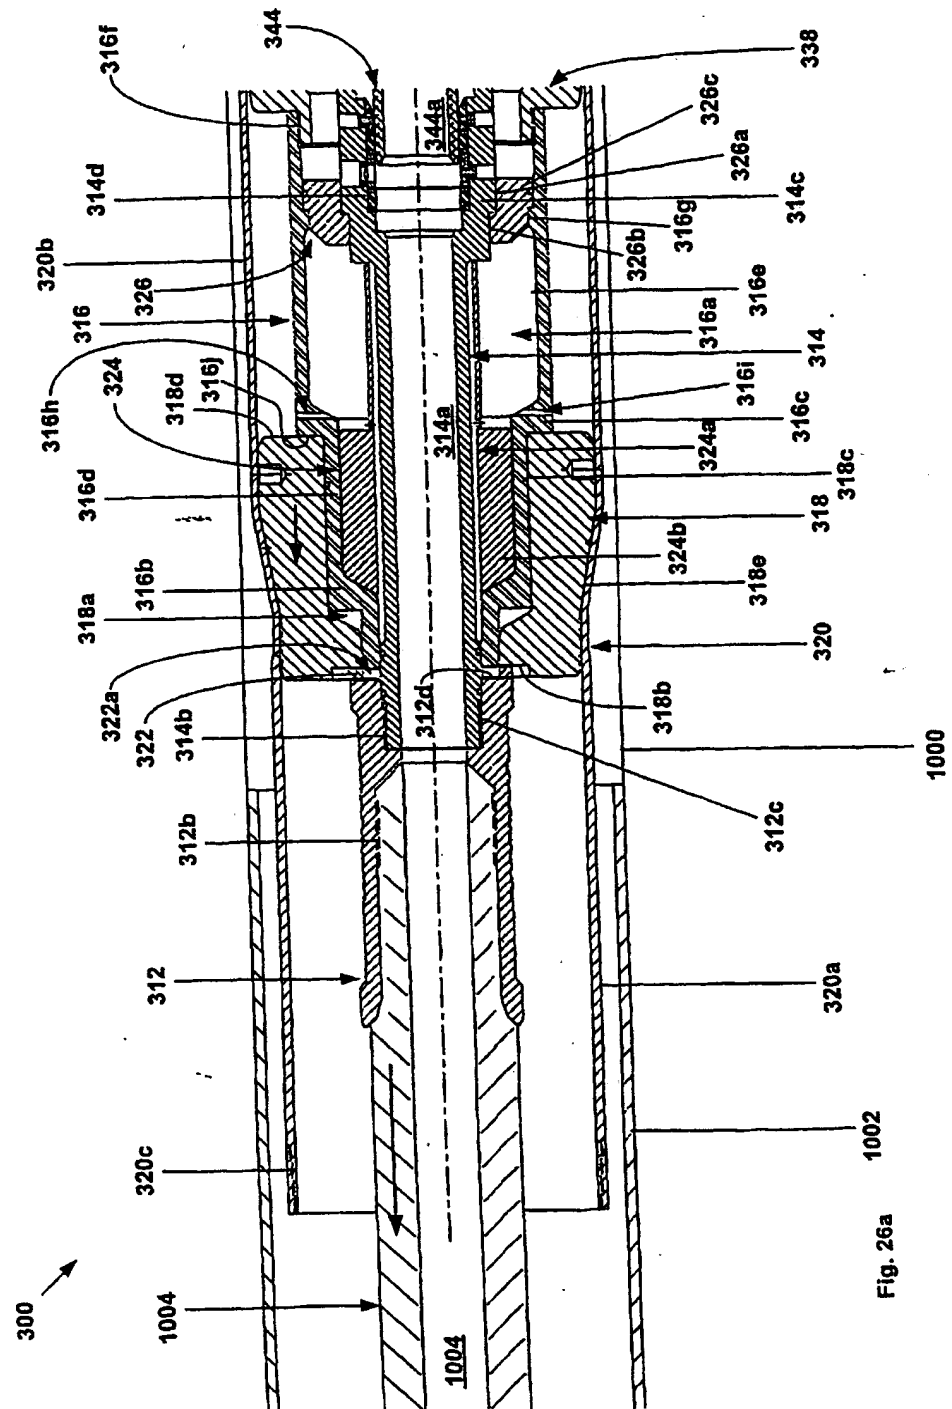
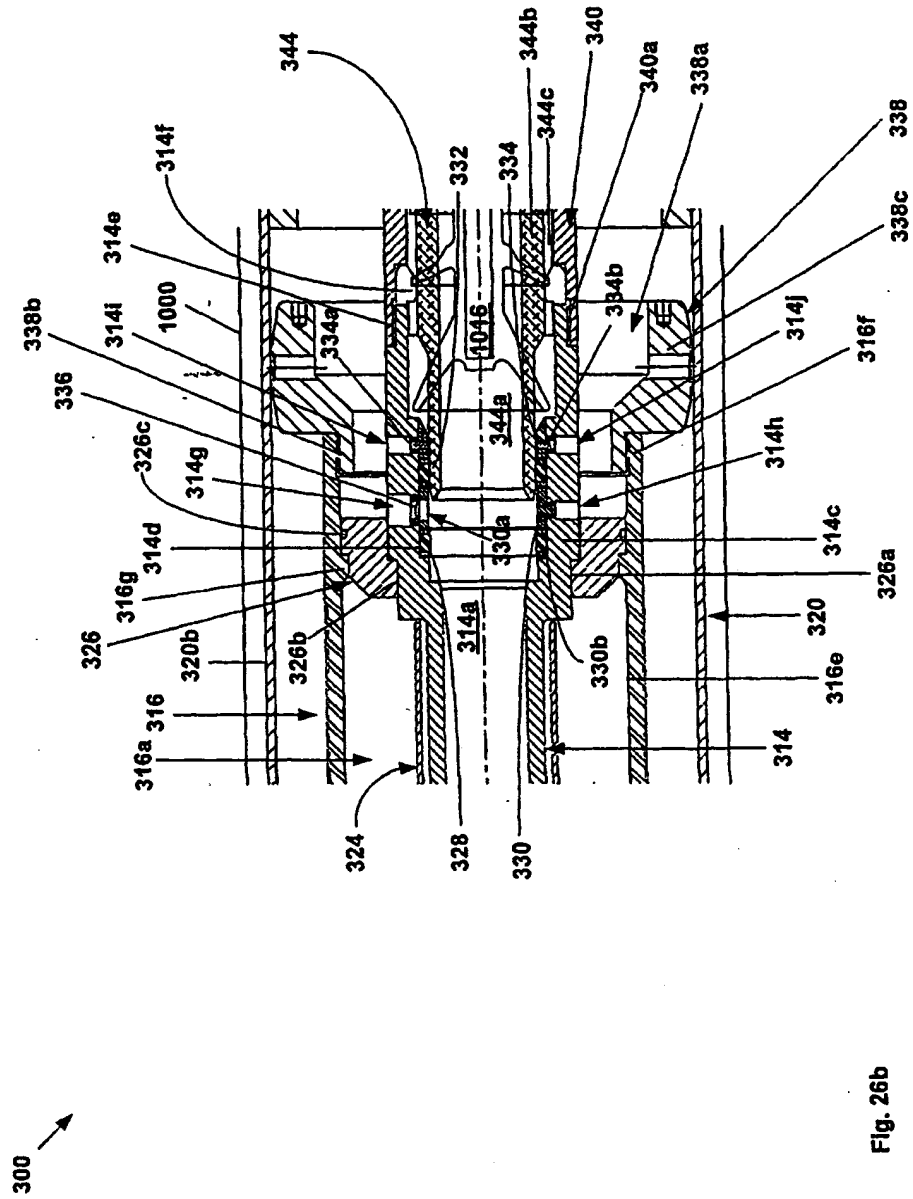
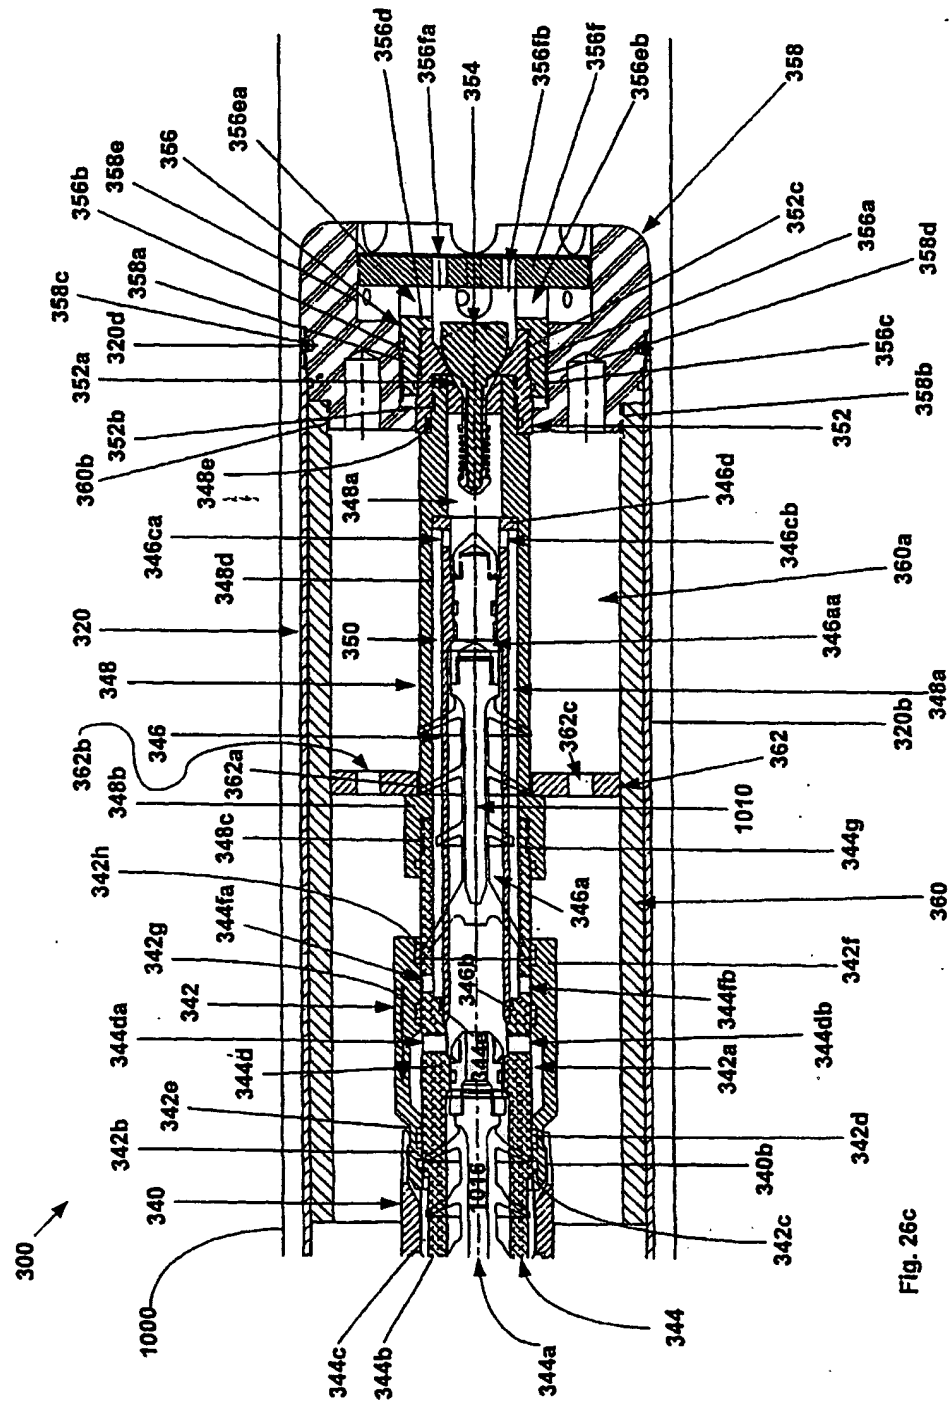


Fig. 26a





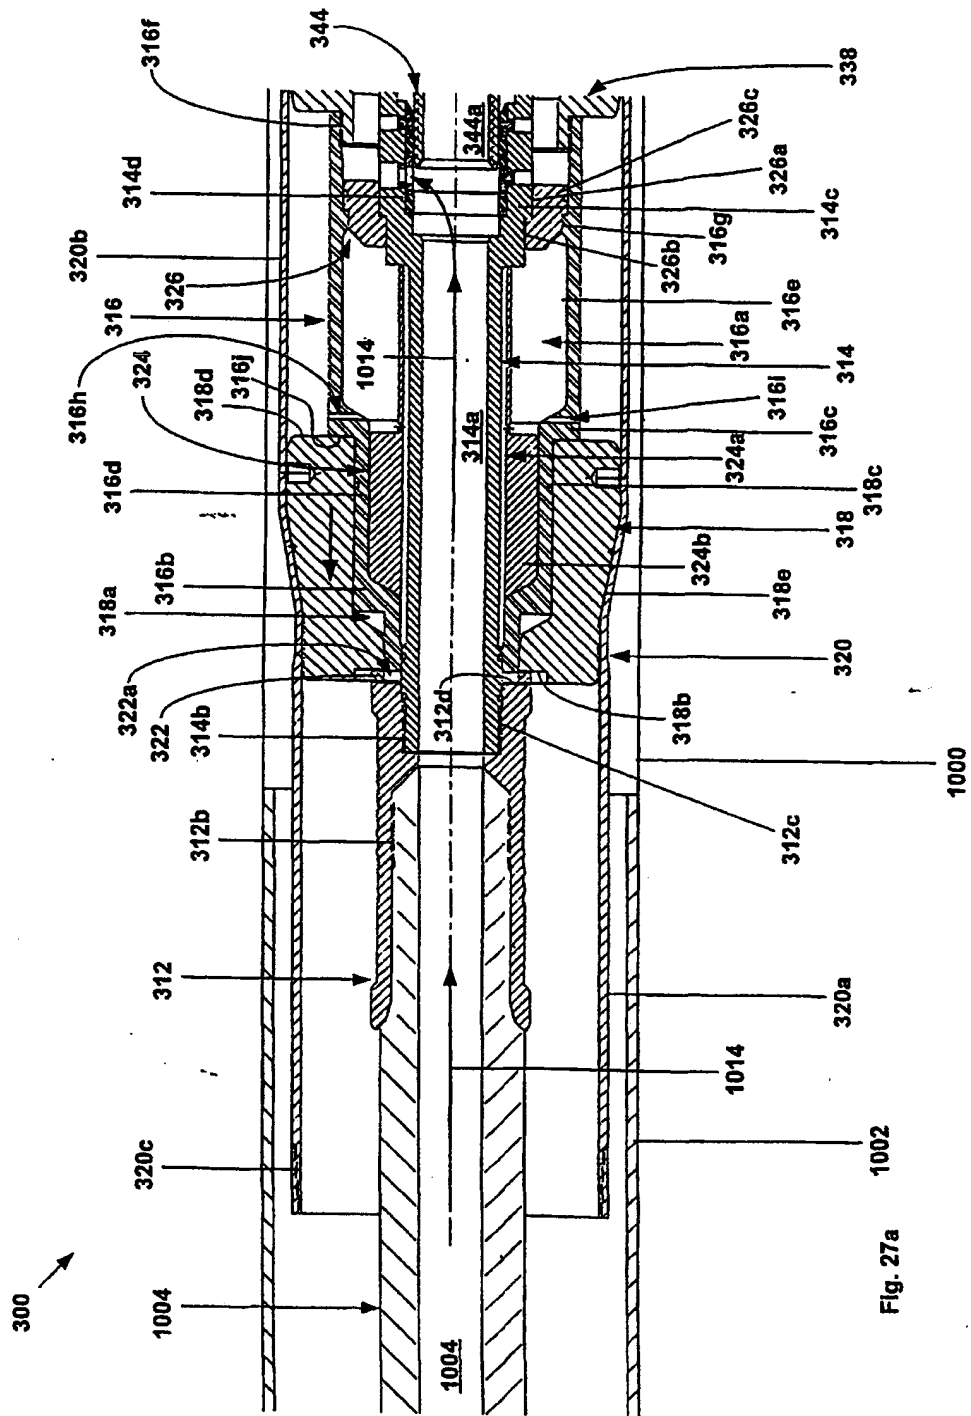
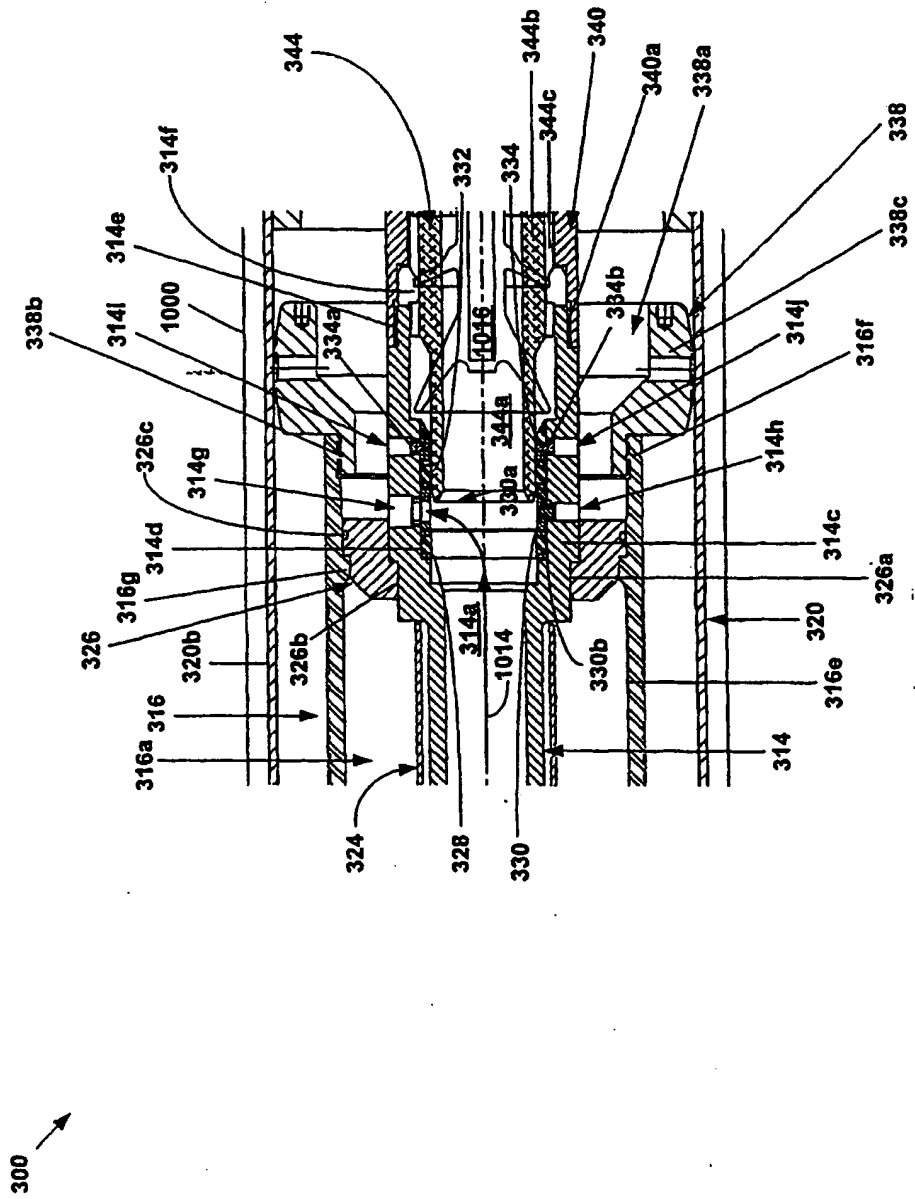


Fig. 27a



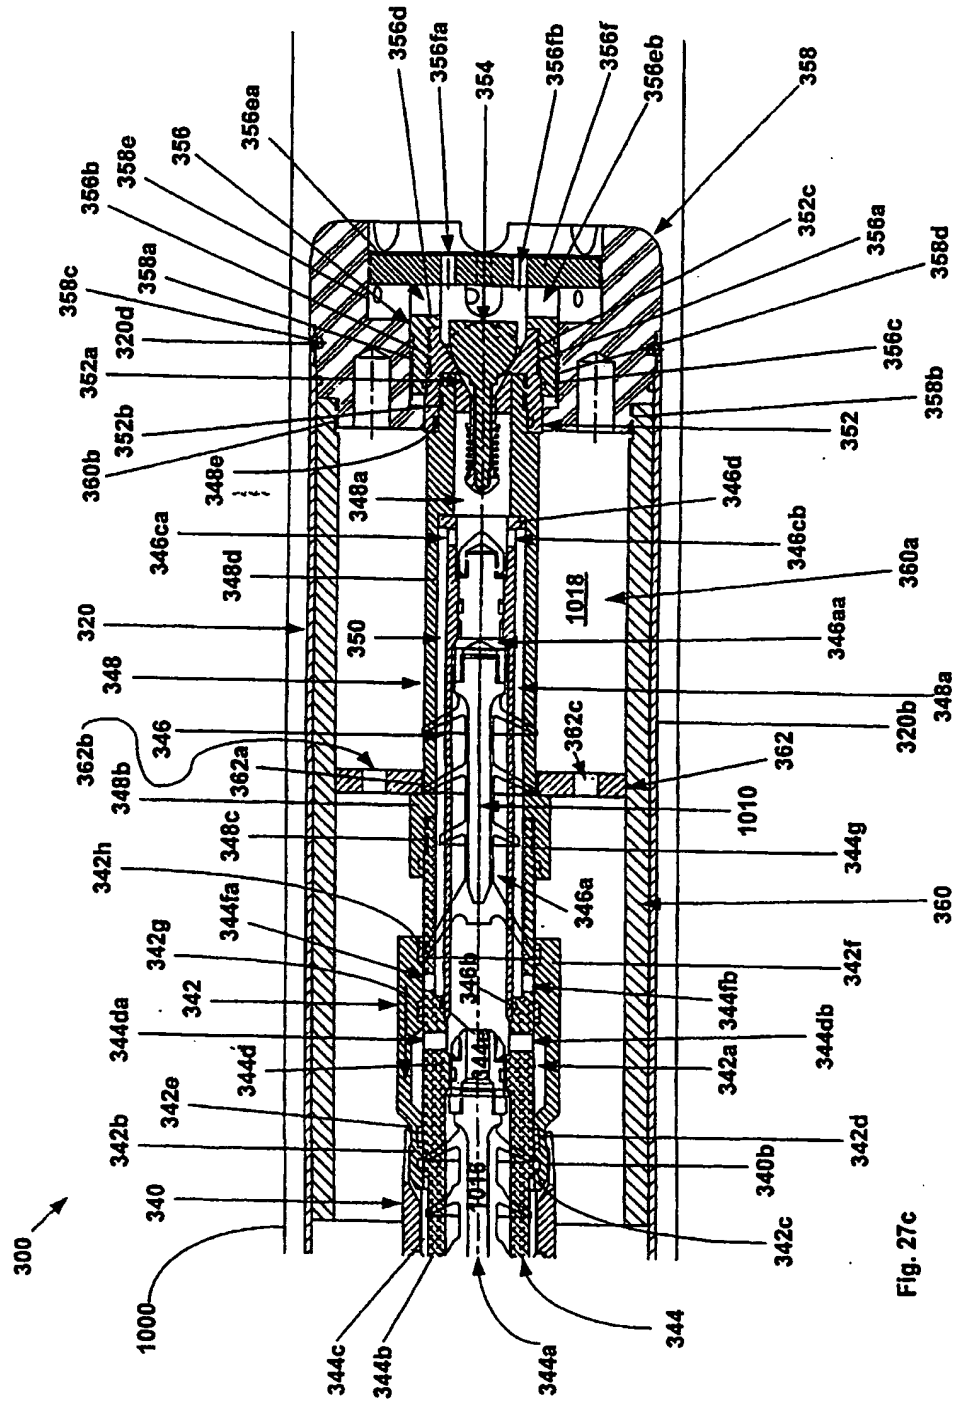


Fig. 27c

450

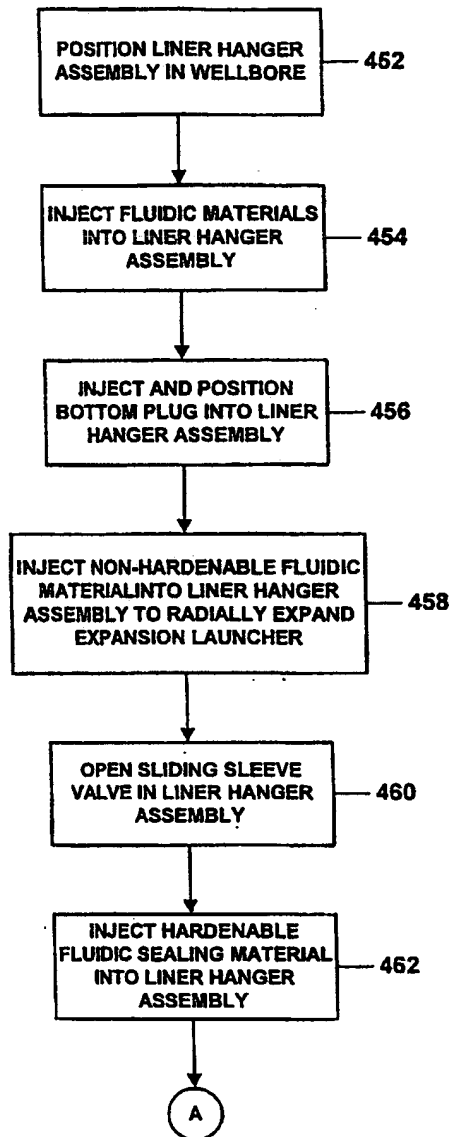


Fig. 28a

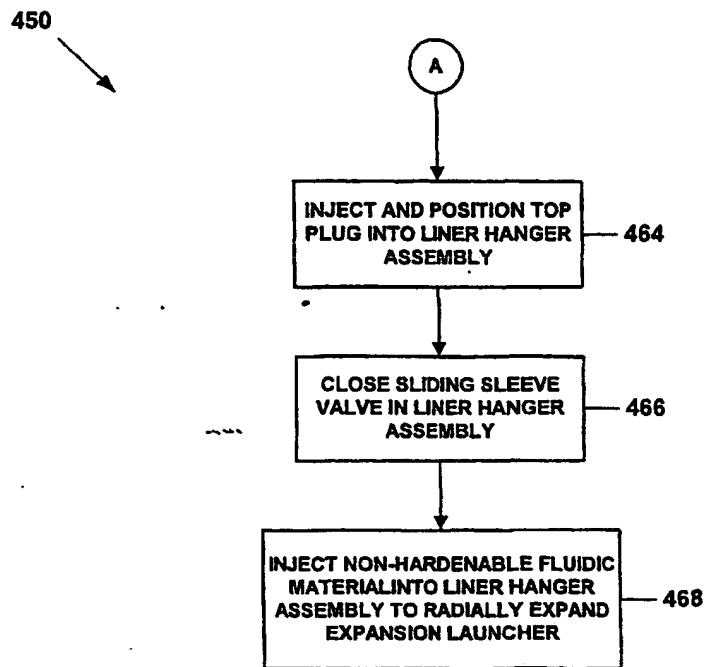
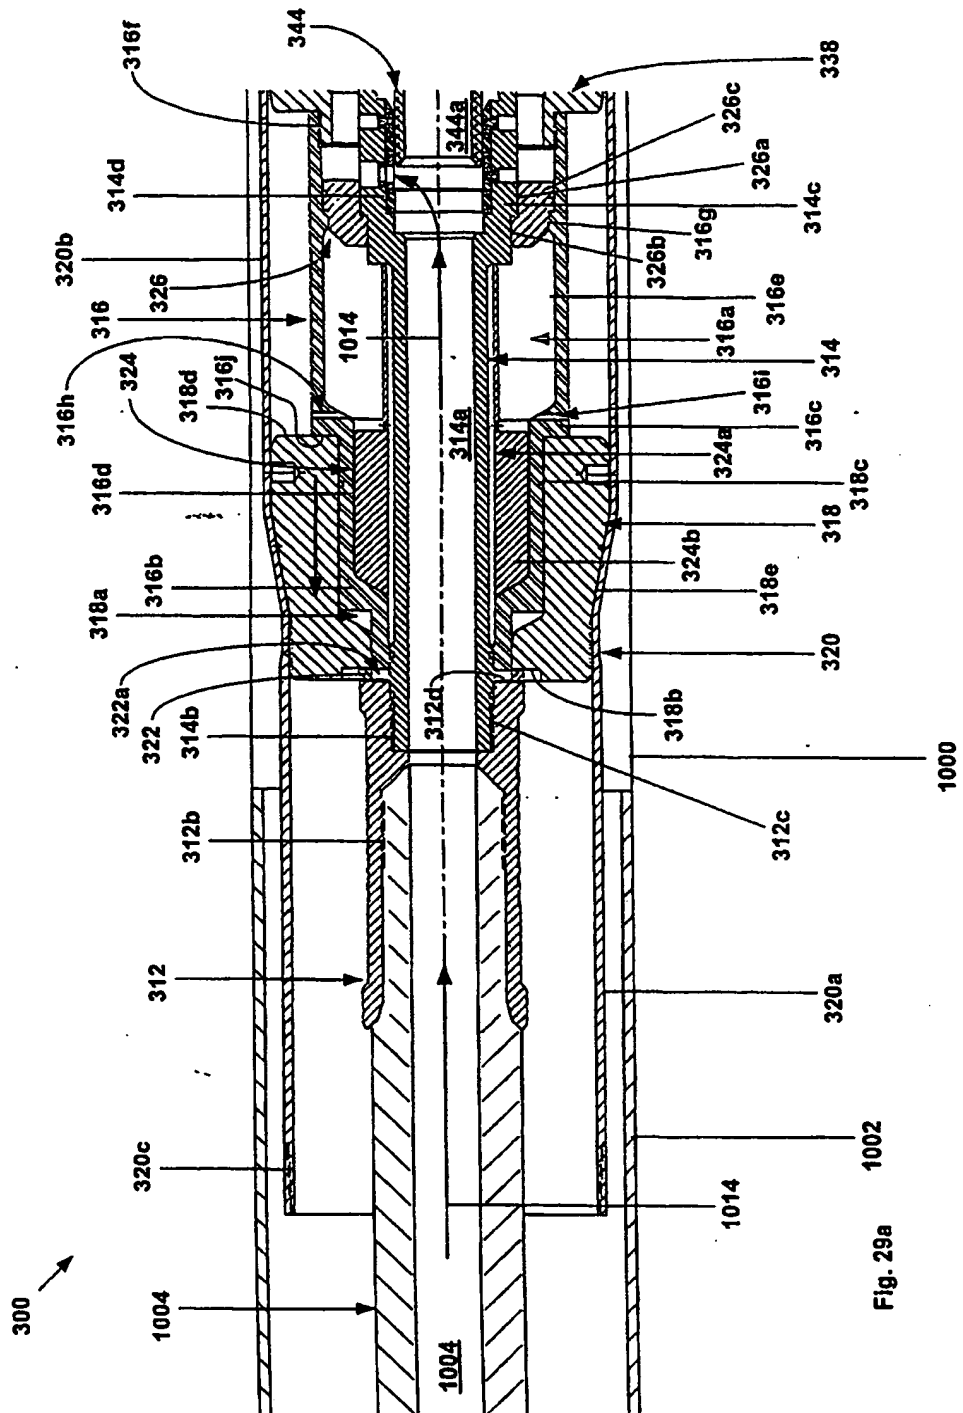


Fig. 28b



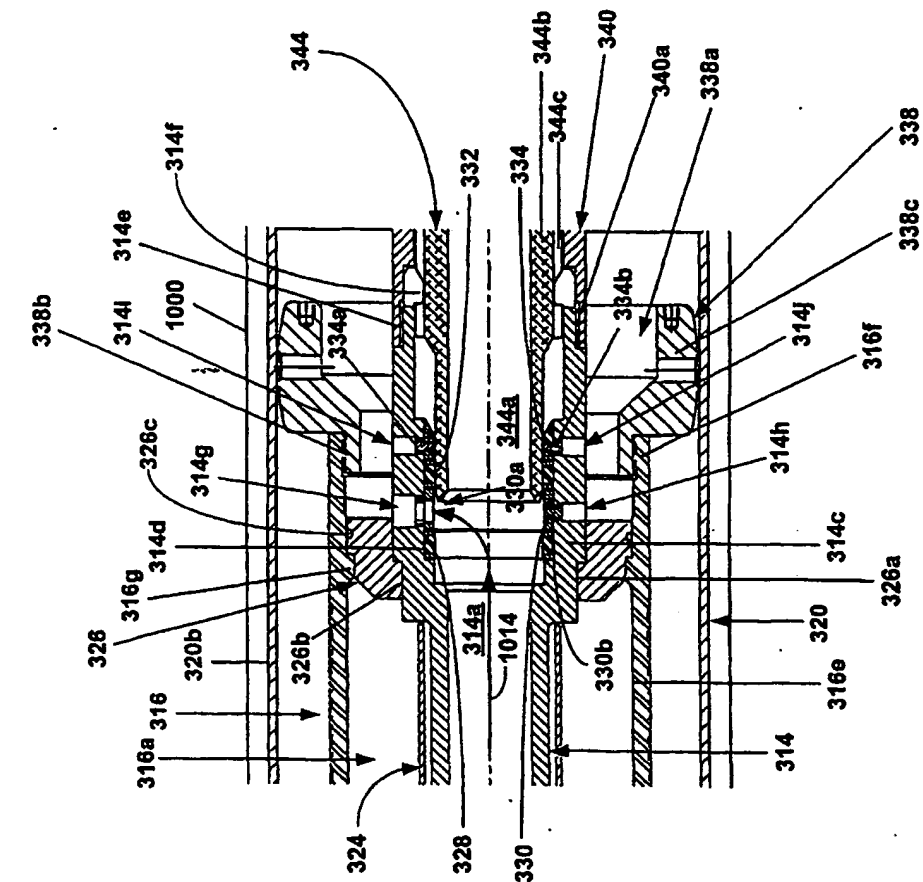


Fig. 29b

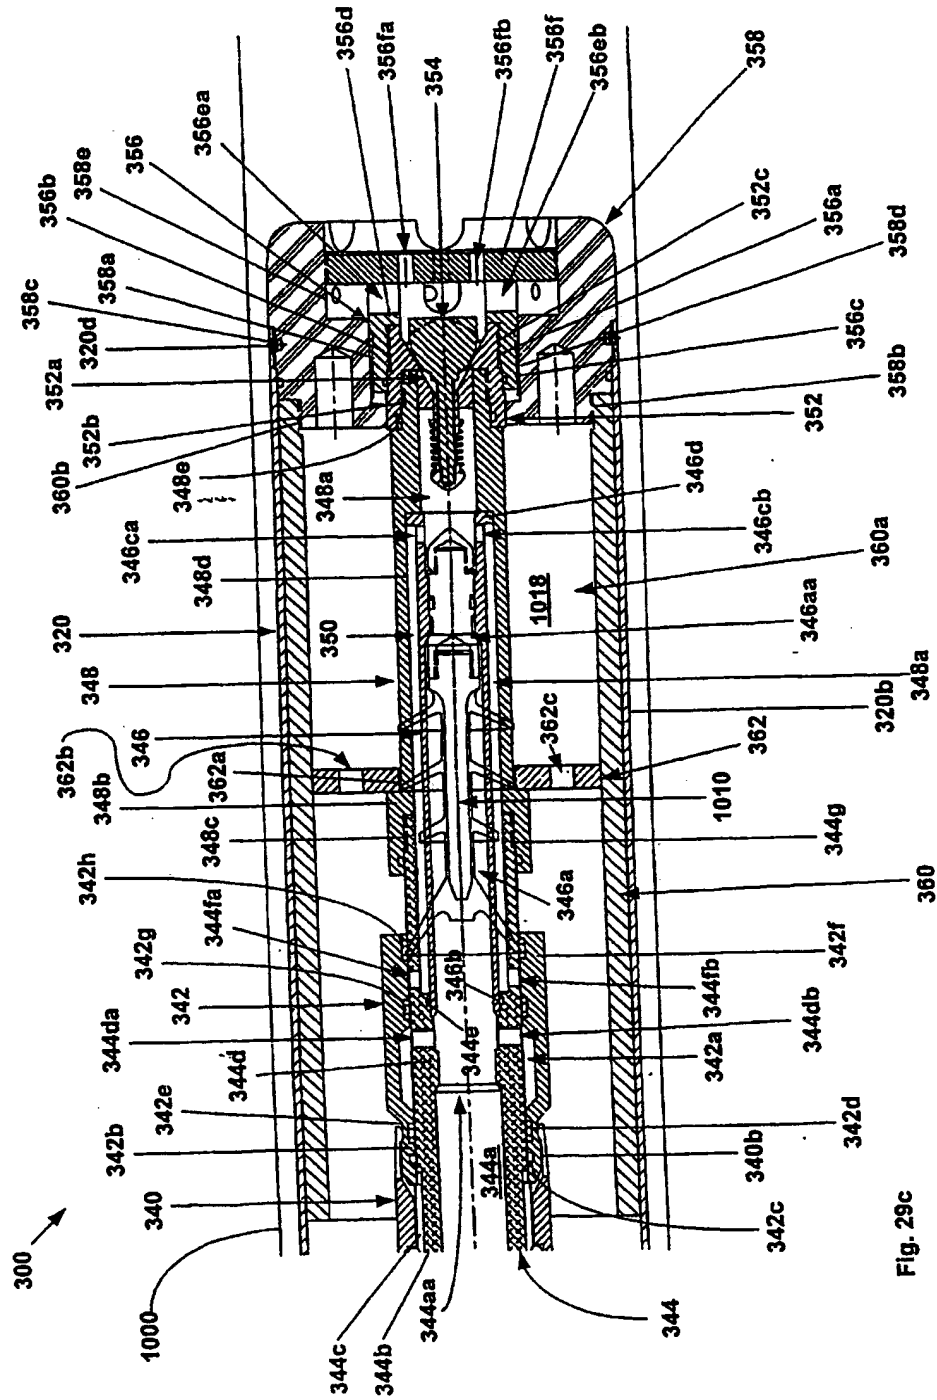


Fig. 29c

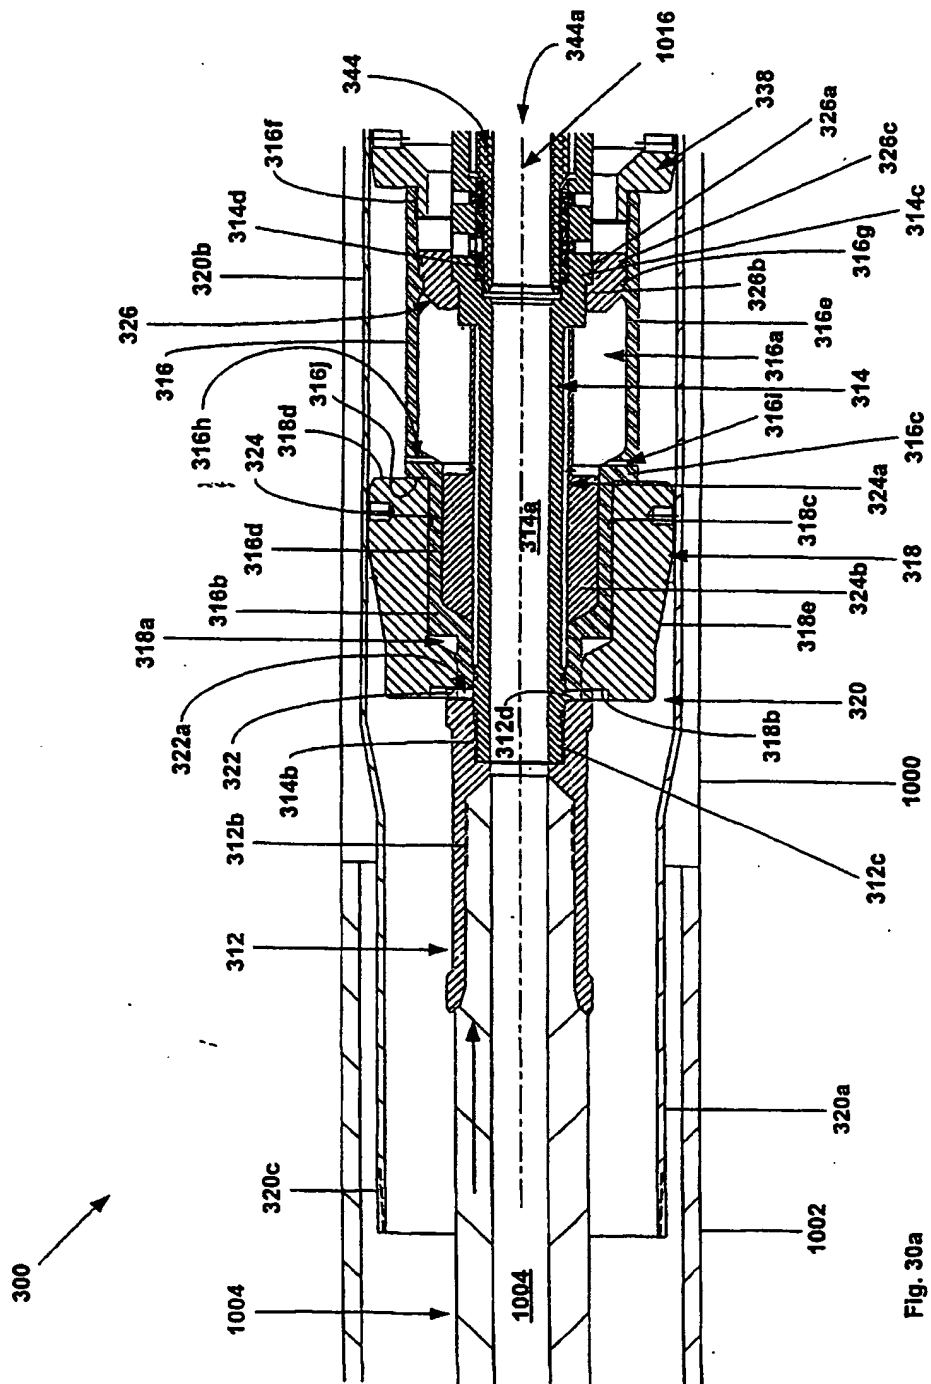


Fig. 30a

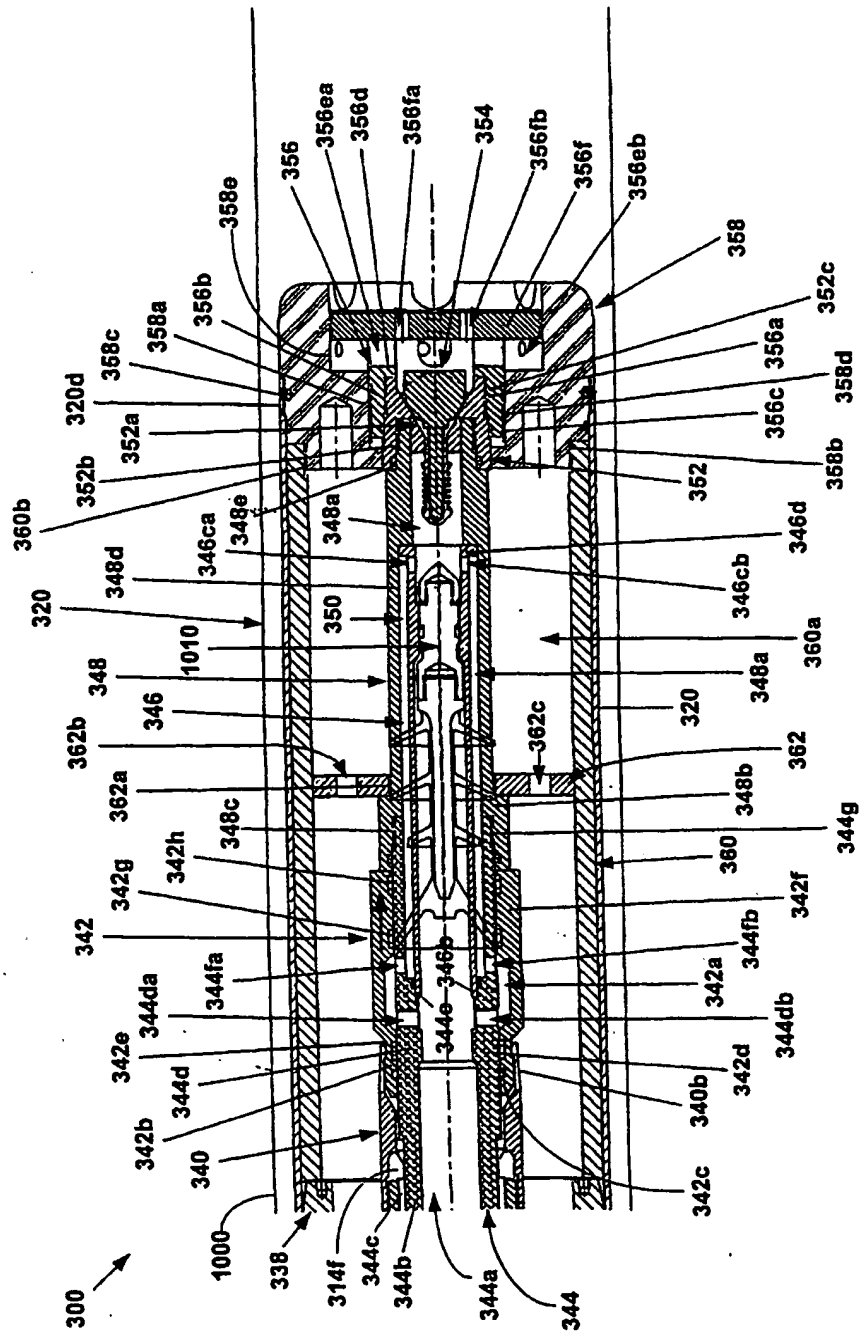


Fig. 30c

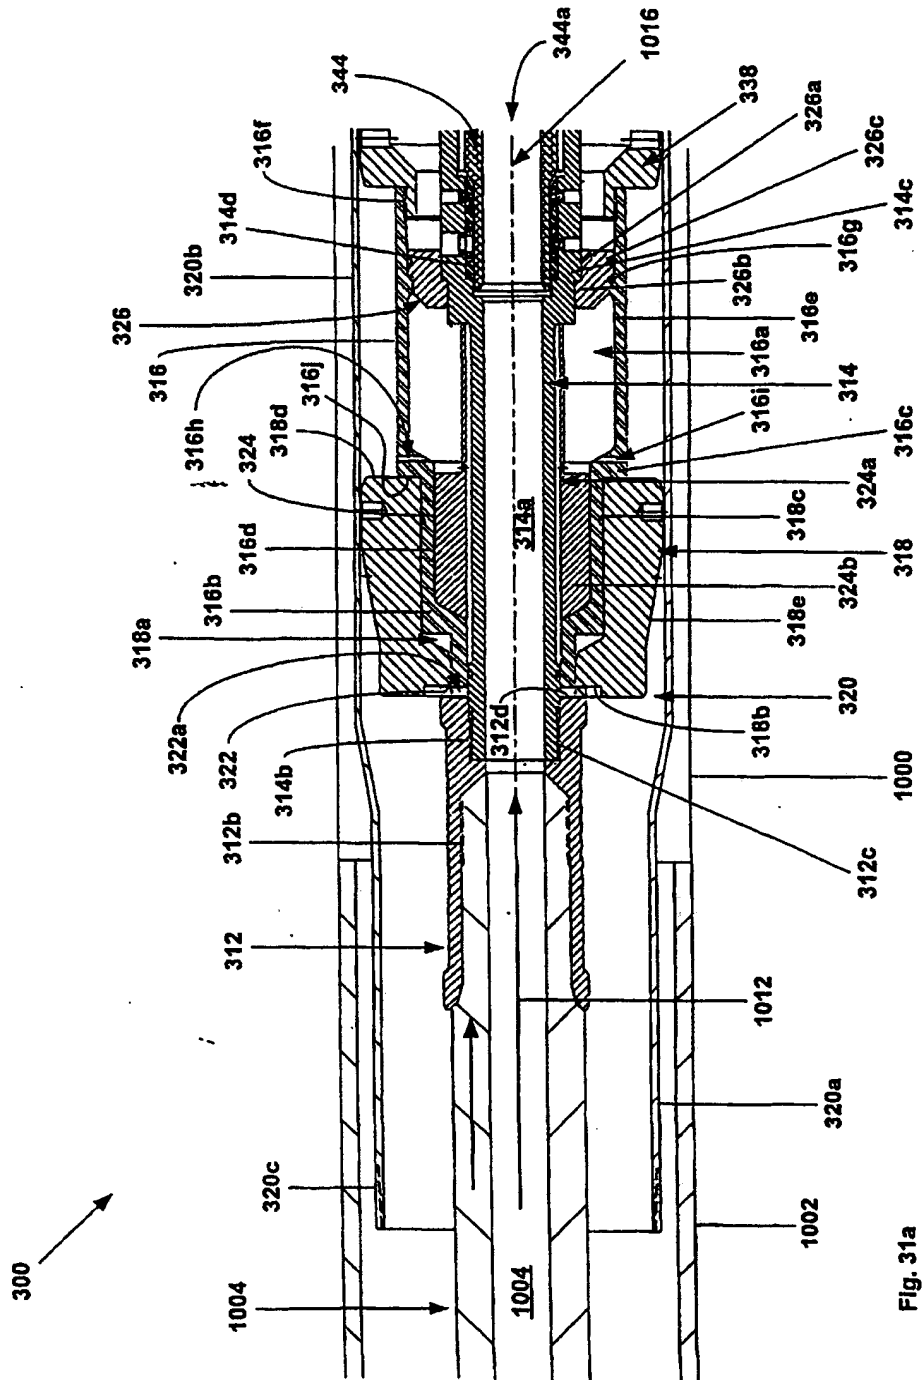


Fig. 31a

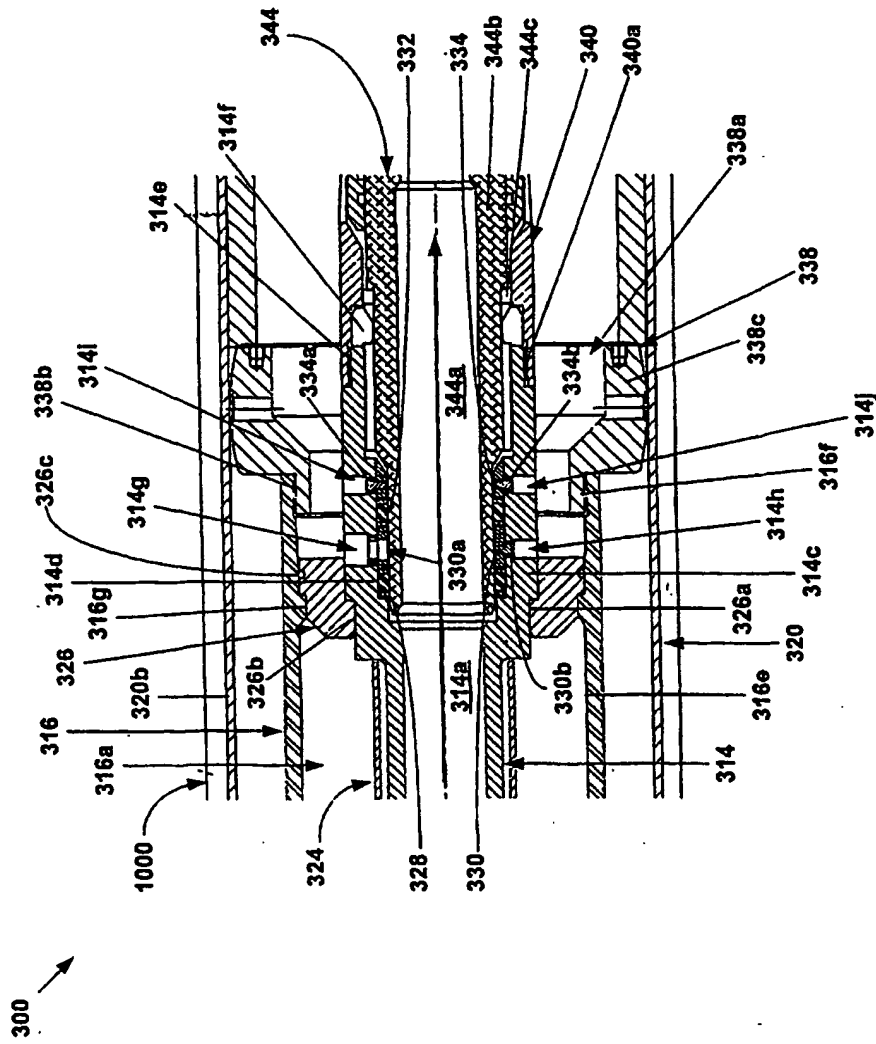


Fig. 31b

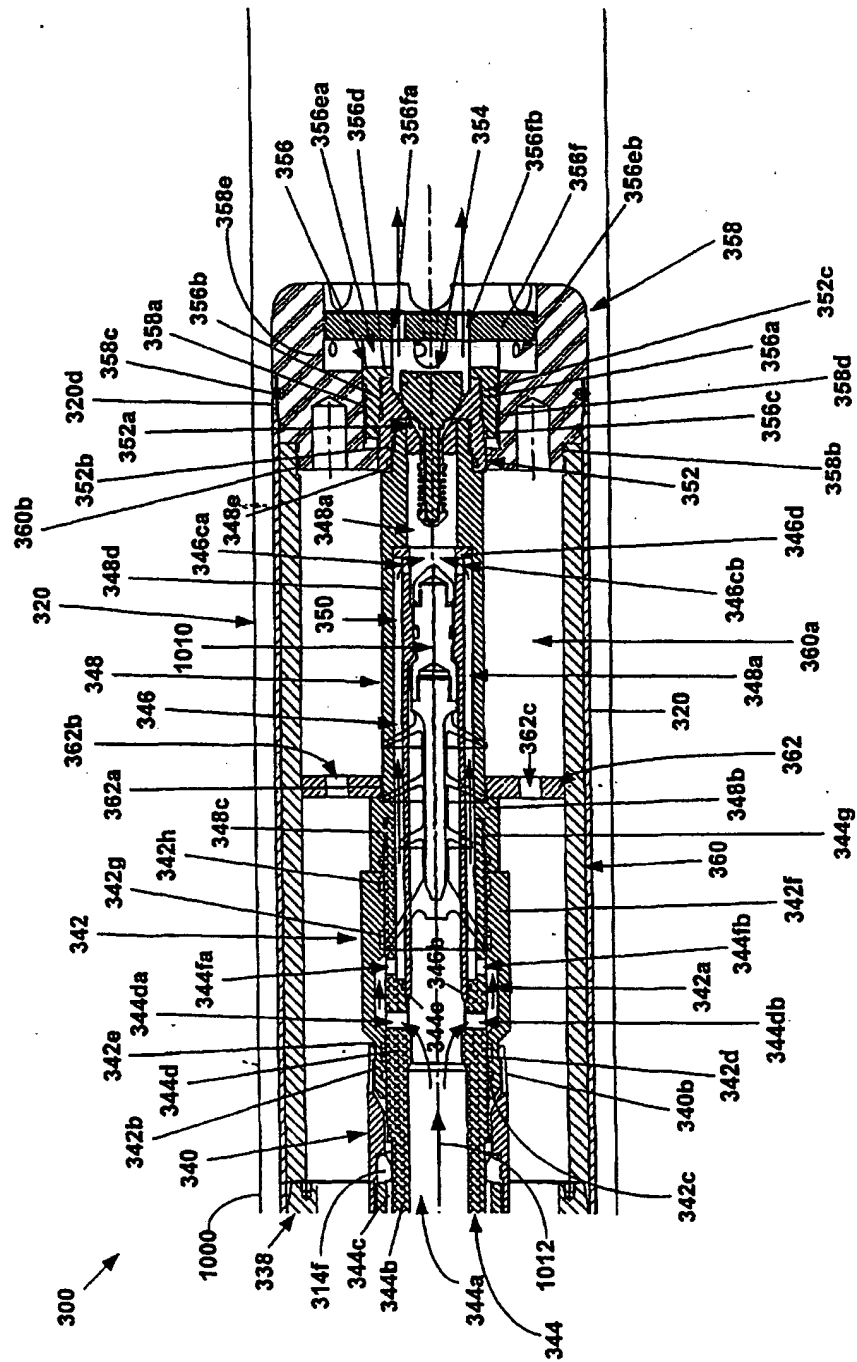


Fig. 31c

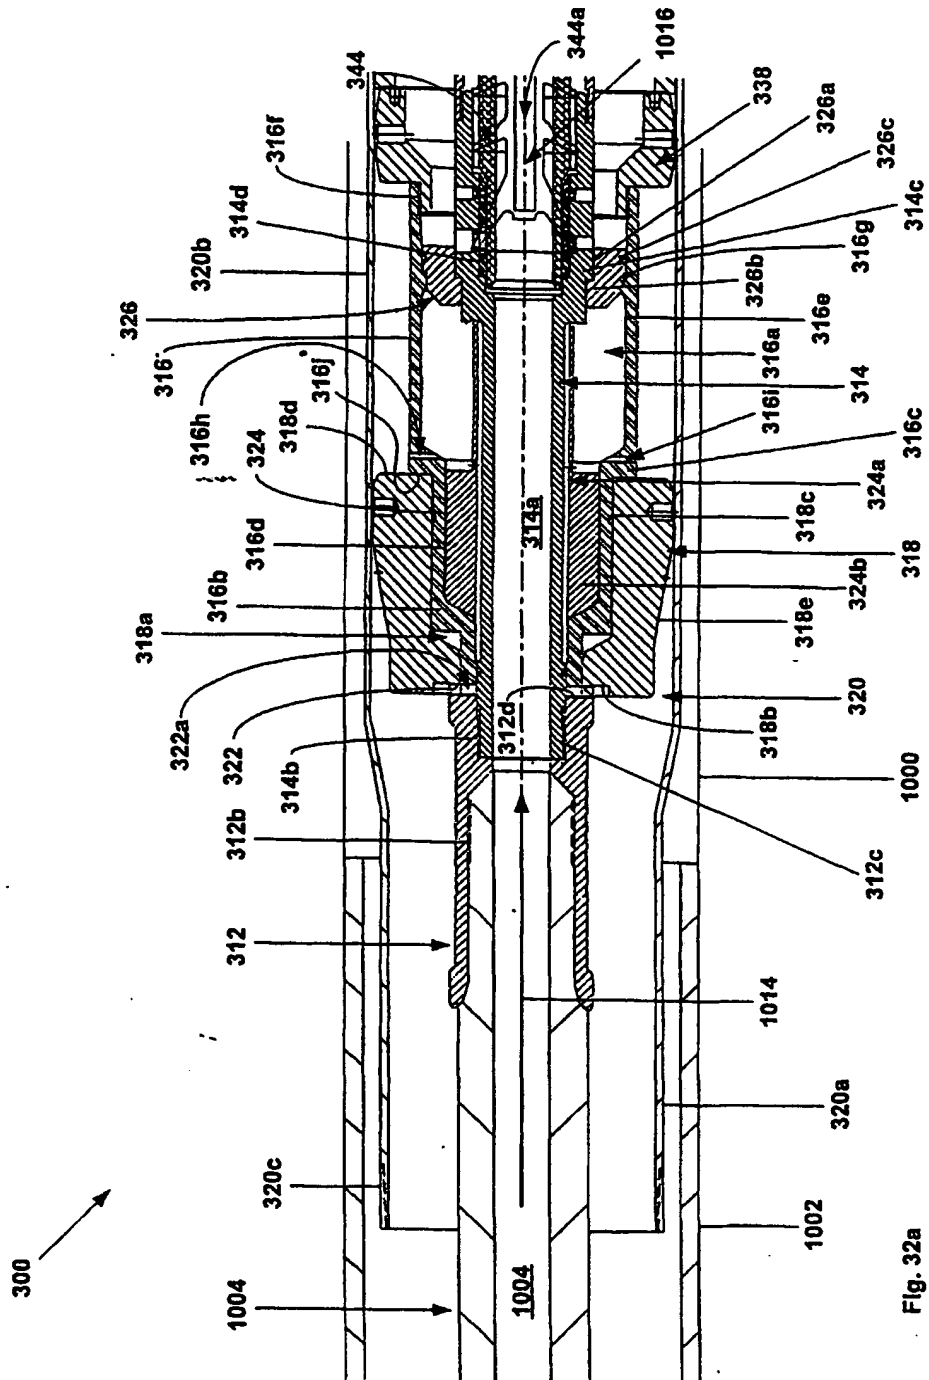


Fig. 32a

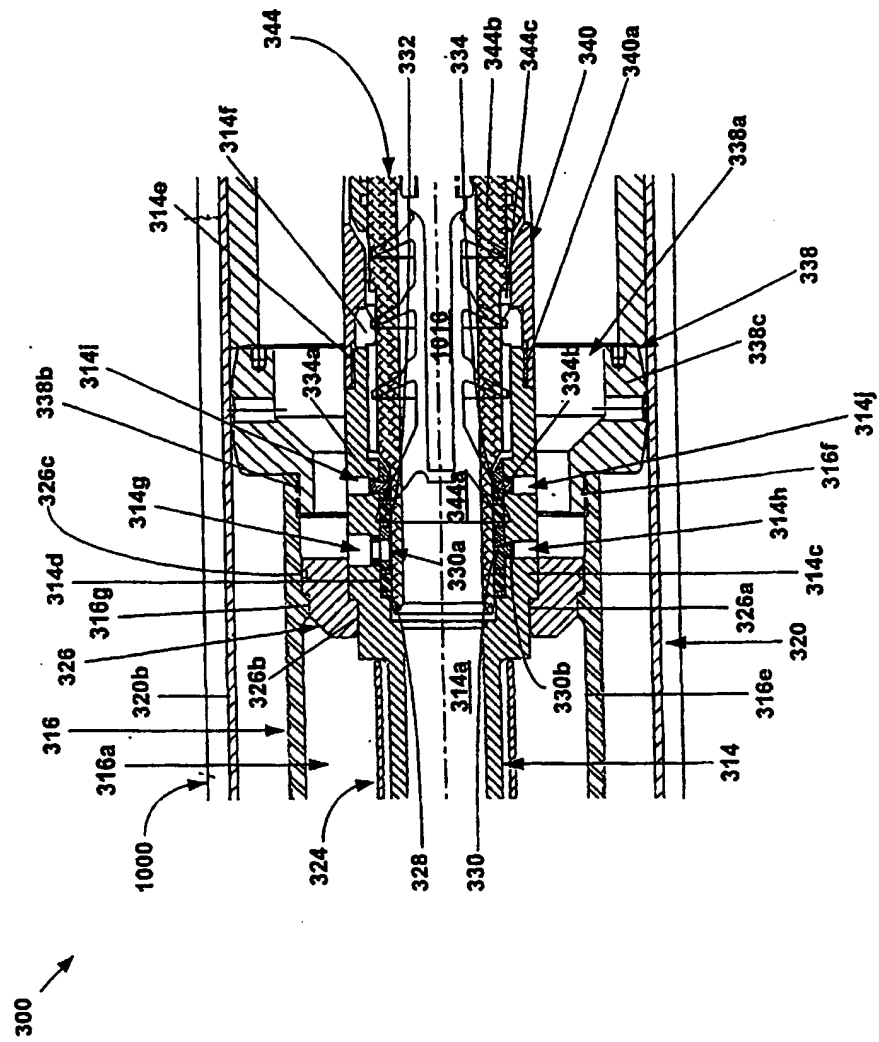


Fig. 32b

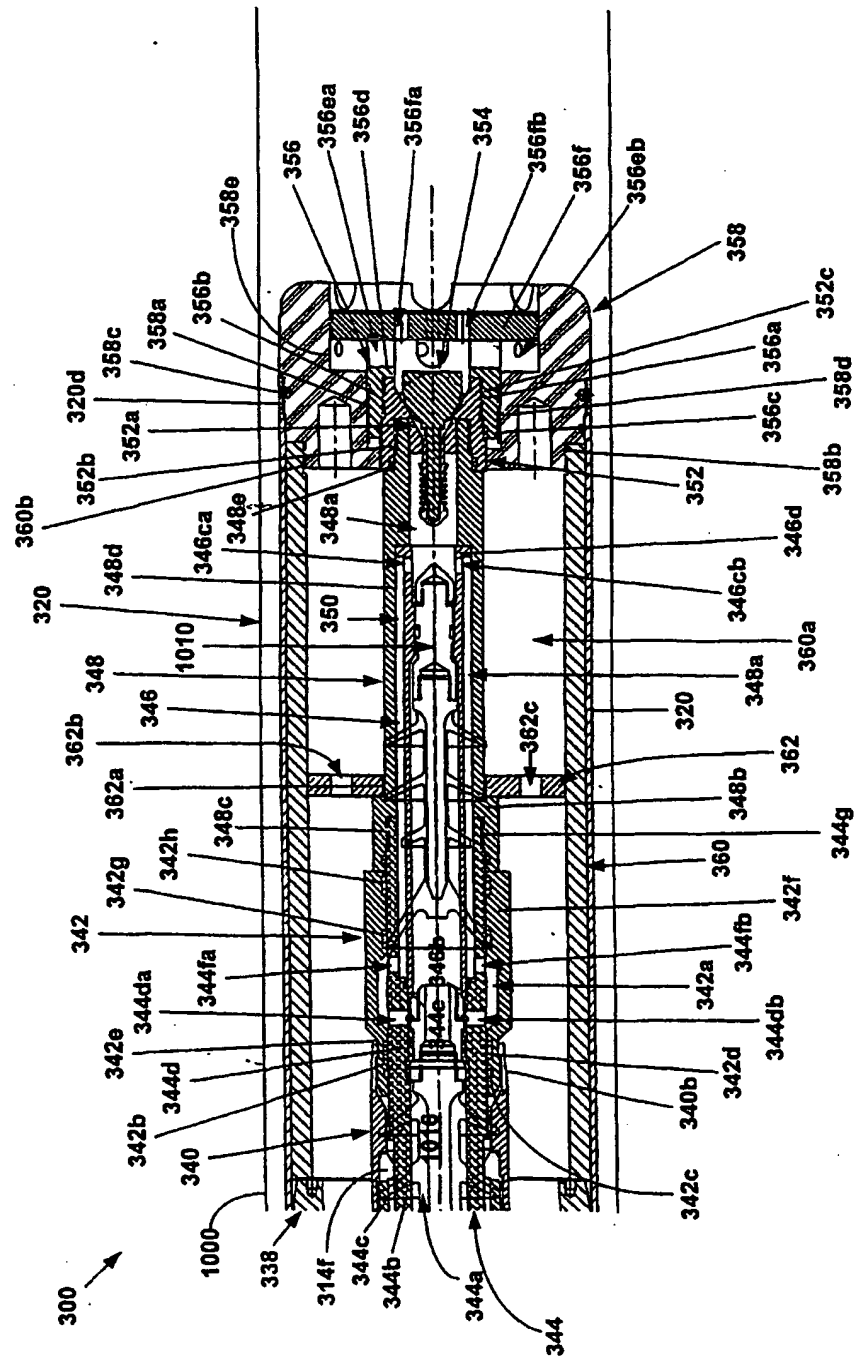


Fig. 32c

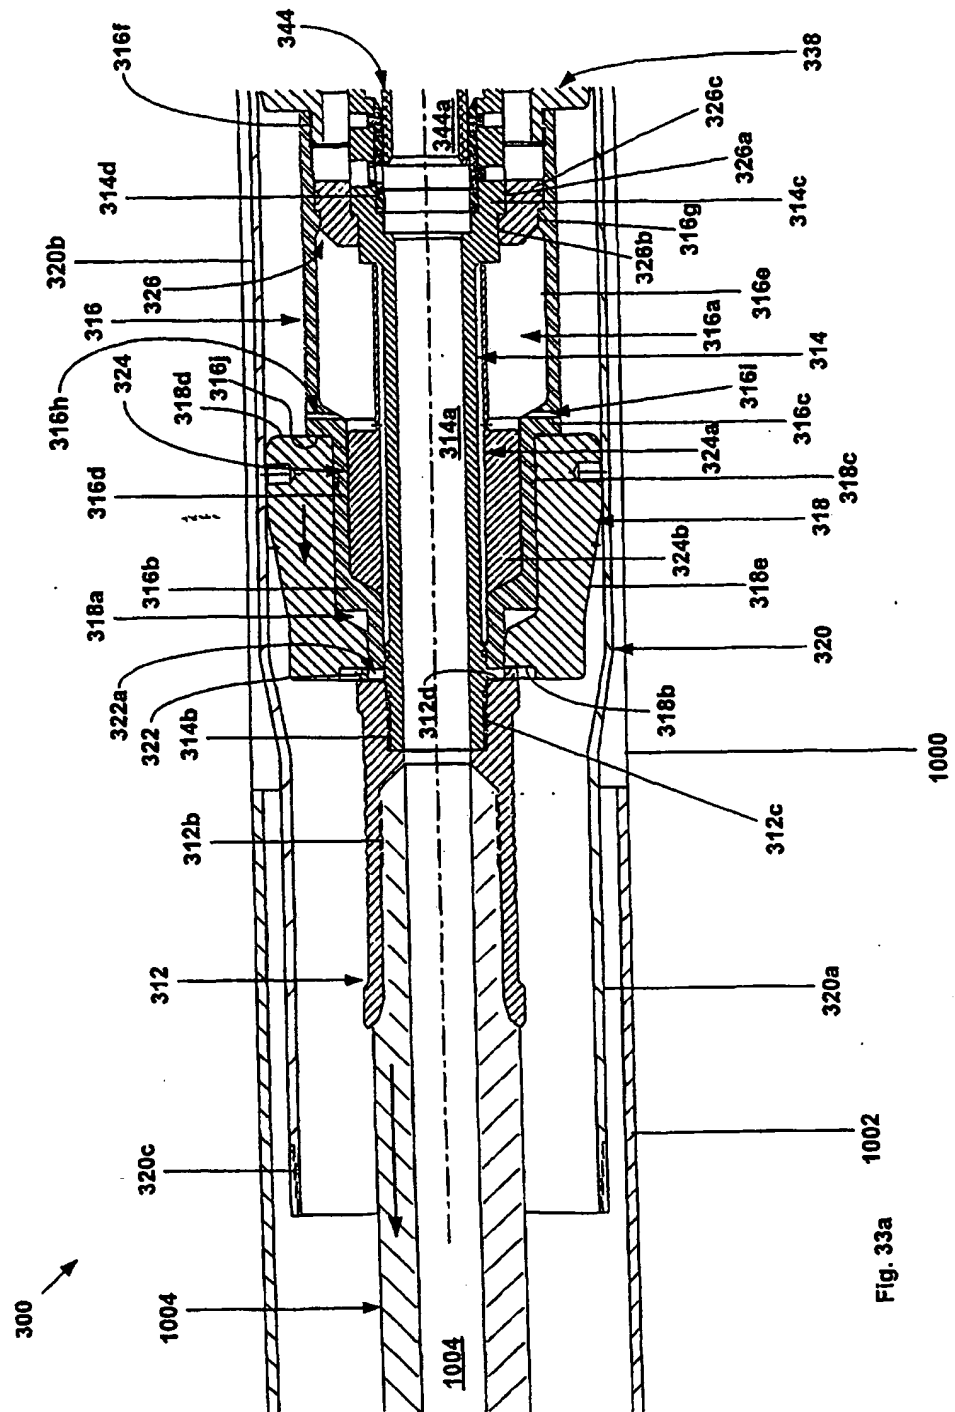


Fig. 33a

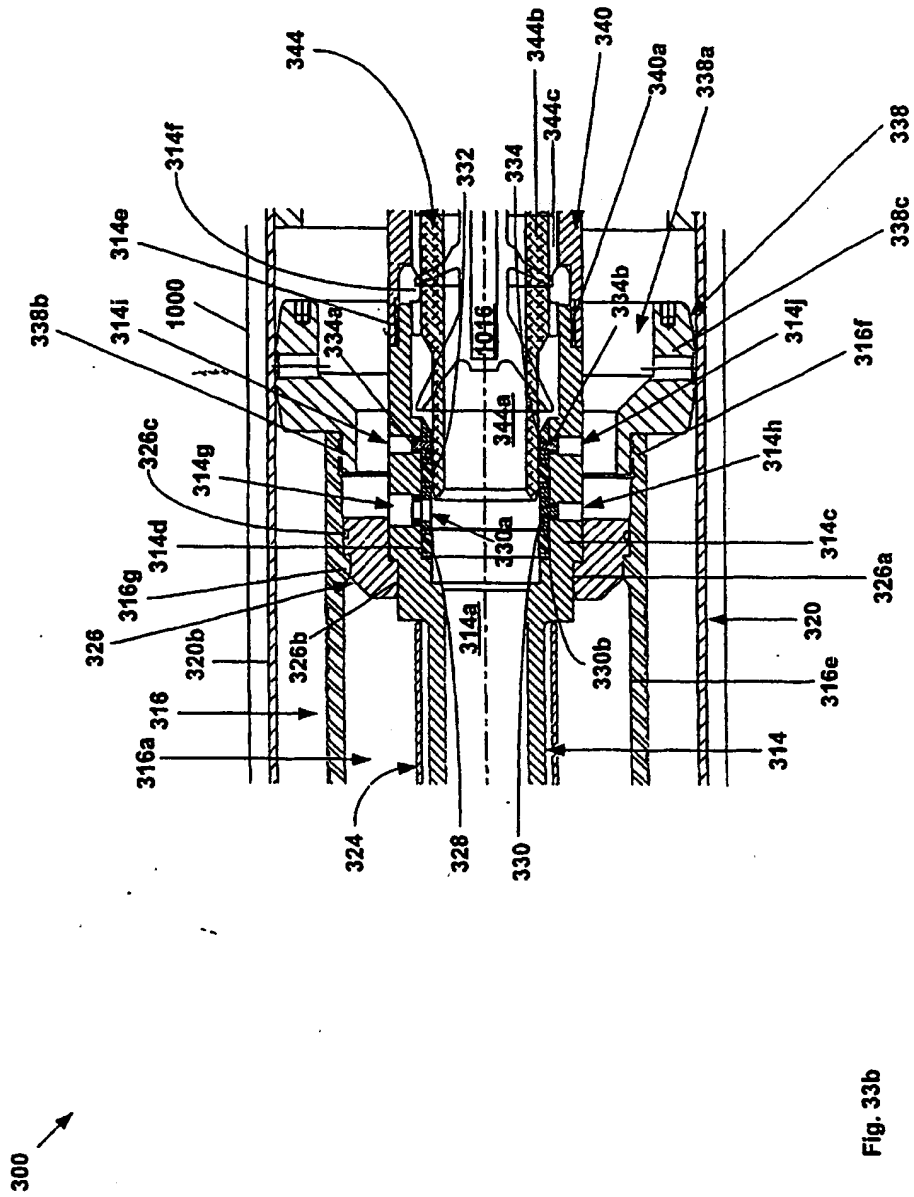


Fig. 33b

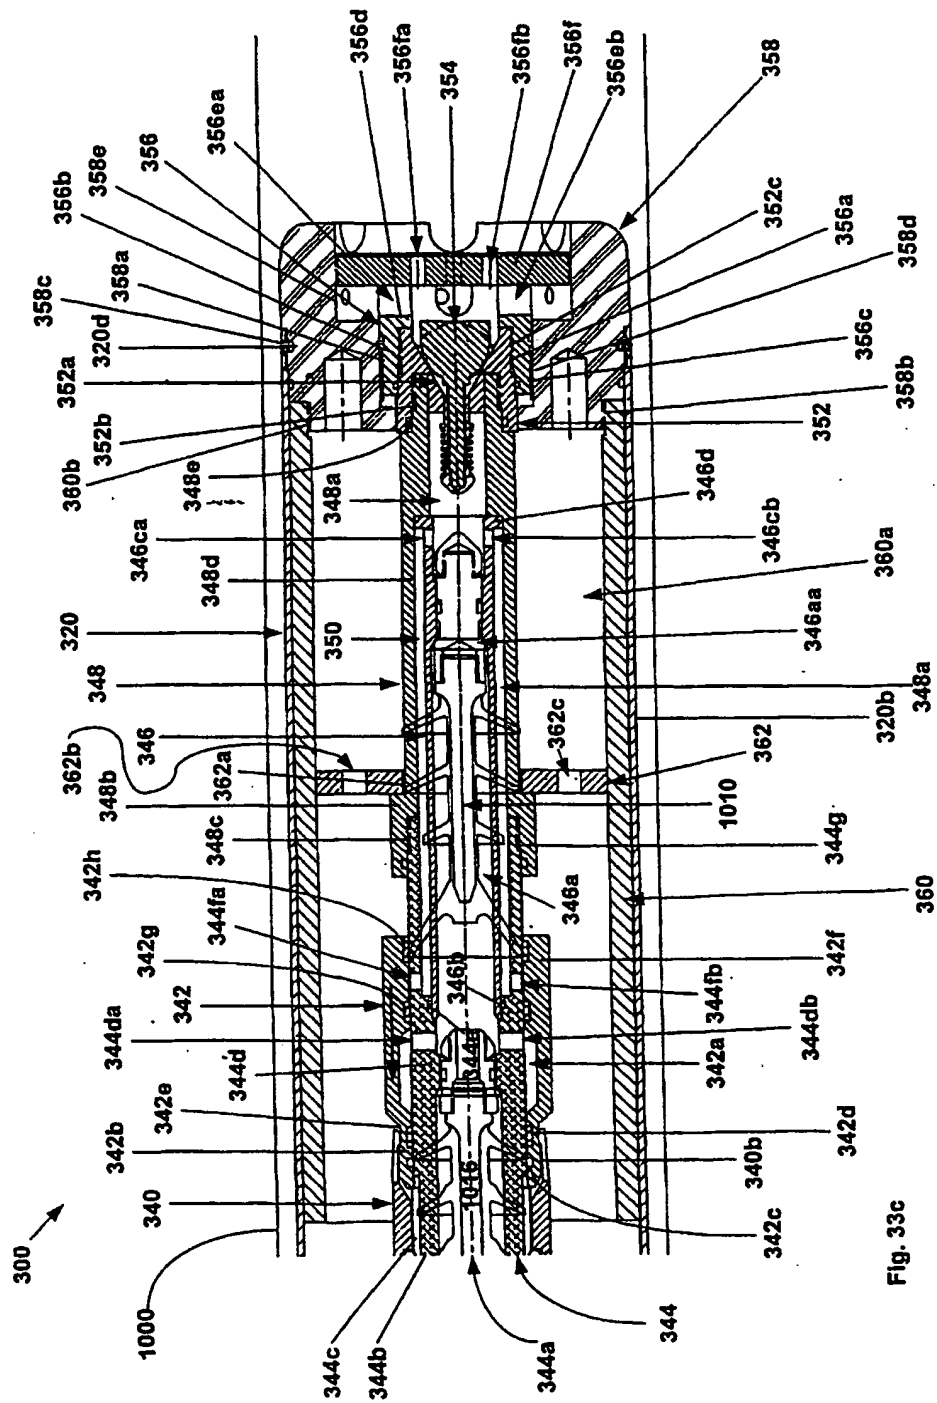


Fig. 33c


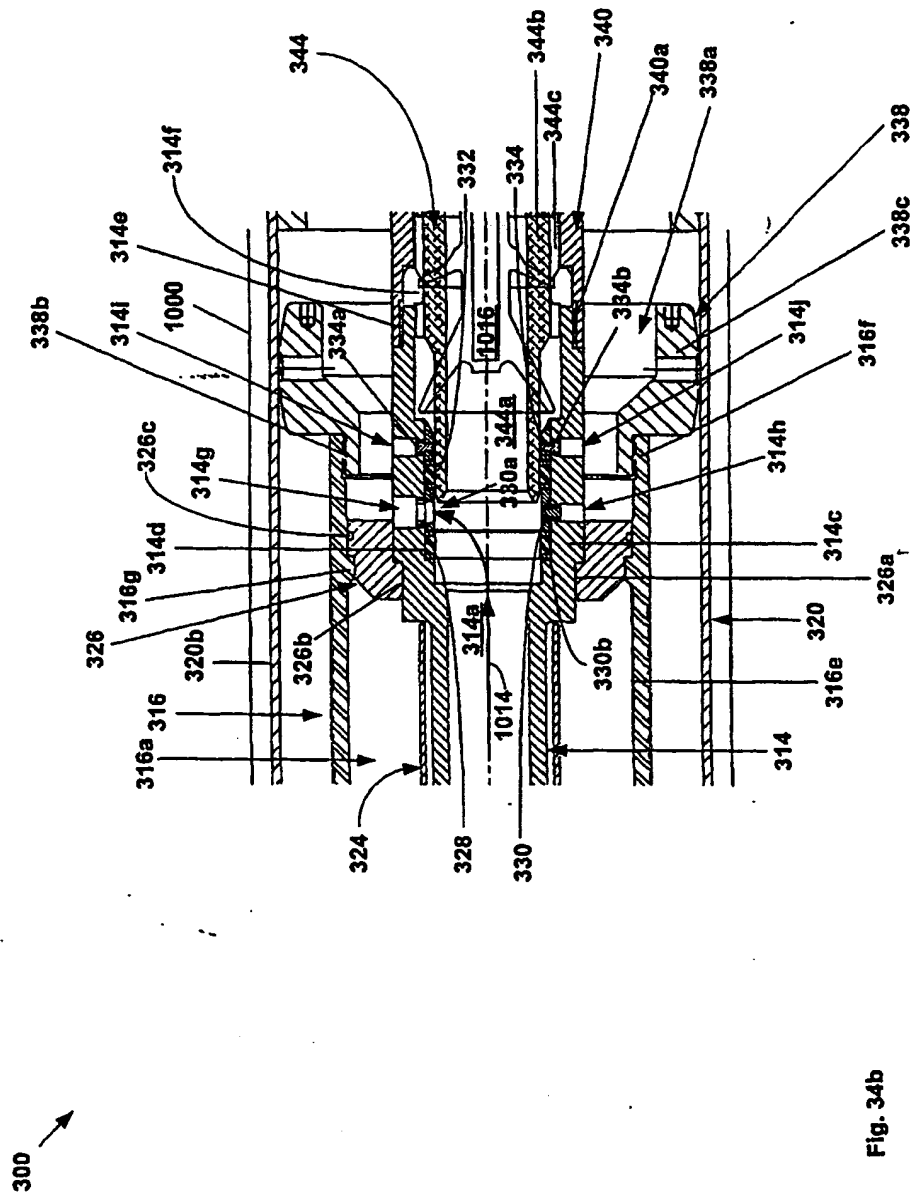


Fig. 34b

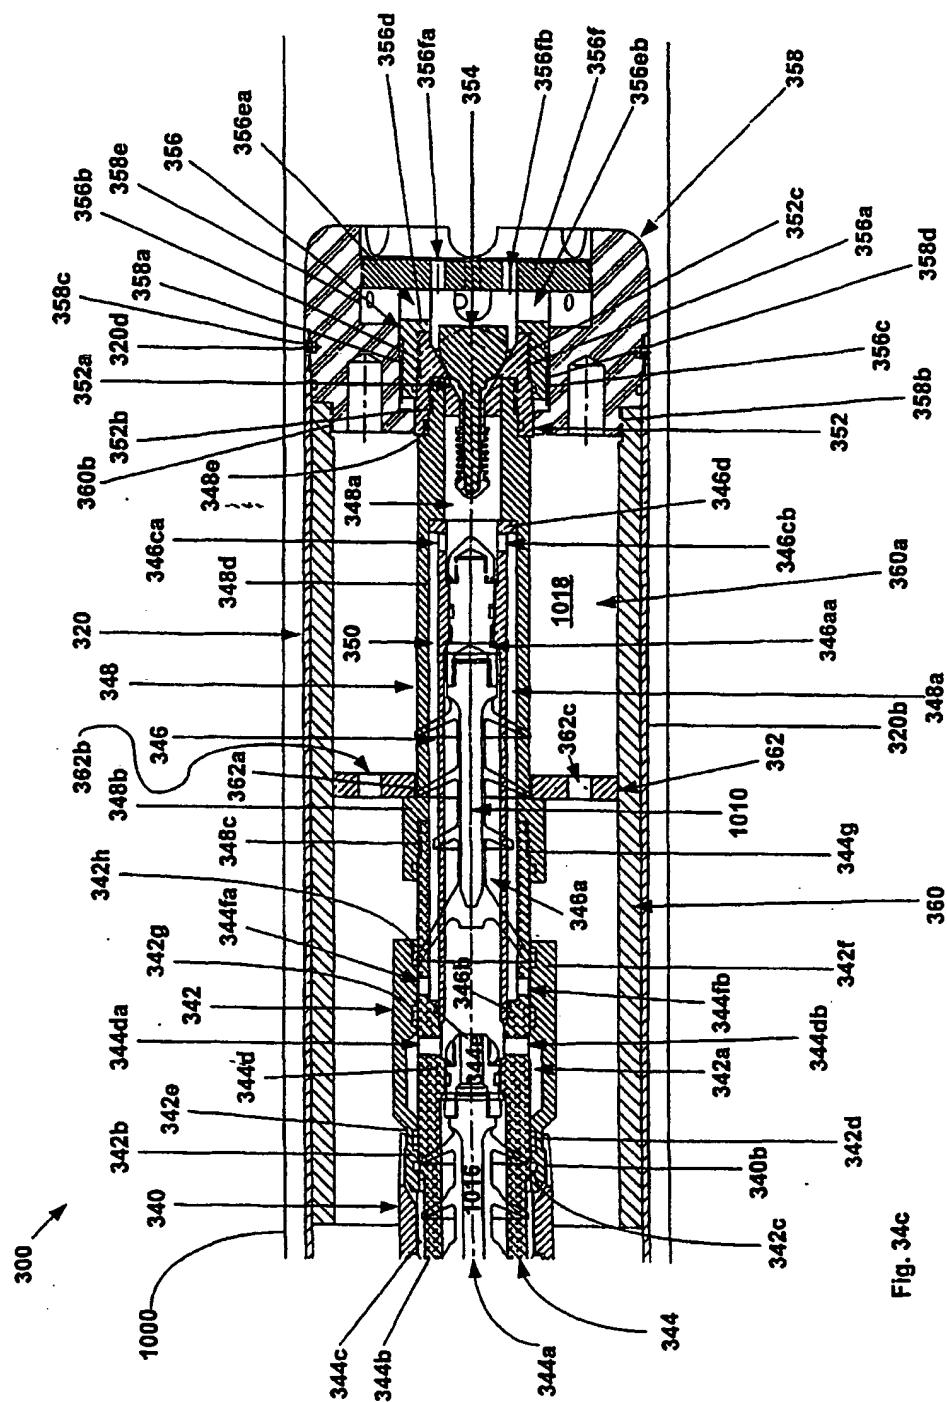

FORMING A WELLBORE CASING

Background of the Invention

This invention relates generally to forming wellbore casings.

Conventionally, when a wellbore is created, a number of casings are installed
5 in the borehole to prevent collapse of the borehole wall and to prevent undesired
outflow of drilling fluid into the formation or inflow of fluid from the formation into
the borehole. The borehole is drilled in intervals whereby a casing which is to be
installed in a lower borehole interval is lowered through a previously installed
casing of an upper borehole interval. As a consequence of this procedure the casing
10 of the lower interval is of smaller diameter than the casing of the upper interval.
Thus, the casings are in a nested arrangement with casing diameters decreasing in
downward direction. Cement annuli are provided between the outer surfaces of the
casings and the borehole wall to seal the casings from the borehole wall. As a
consequence of this nested arrangement a relatively large borehole diameter is
15 required at the upper part of the wellbore. Such a large borehole diameter involves
increased costs due to heavy casing handling equipment, large drill bits and
increased volumes of drilling fluid and drill cuttings. Moreover, increased drilling
rig time is involved due to required cement pumping, cement hardening, required
equipment changes due to large variations in hole diameters drilled in the course of
20 the well, and the large volume of cuttings drilled and removed.

The present invention is directed to overcoming one or more of the
limitations of the existing procedures for forming wellbores.

Summary of the Invention

25 According to one aspect of the present invention there is provided an apparatus
for forming a wellbore casing within a borehole within a subterranean formation,
comprising:

a first annular support member defining a first fluid passage and one or more
first radial passages each having one or more pressure sensitive valves fluidically
30 coupled to the first fluid passage;



an annular expansion cone coupled to the first annular support member;
an expandable tubular member movably coupled to the expansion cone;
a second annular support member defining a second fluid passage coupled to
the expandable tubular member;

5 an annular valve member defining a third fluid passage fluidicly coupled to the
first and second fluid passages having first and second throat passages, defining
second and third radial passages fluidicly coupled to the third fluid passage, coupled
to the second annular support member, and movably coupled to the first annular
support member; and

10 an annular sleeve releasably coupled to the first annular support member and
movably coupled to the annular valve member for controllably fluidicly coupling the
second and third radial passages; and

wherein an annular region is defined by the region between the tubular
member and the first annular support member, the second annular support member,
15 the annular valve member, and the annular sleeve.

According to another aspect of the present invention there is provided a
method of operating an apparatus for forming a wellbore casing within a borehole
within a subterranean formation, the apparatus comprising:

20 a first annular support member defining a first fluid passage and one or more
first radial passages, each of the one or more first radial passages having a pressure
sensitive valve fluidicly coupled to the first fluid passage;

an annular expansion cone coupled to the first annular support member;
an expandable tubular member movably coupled to the expansion cone;
a second annular support member defining a second fluid passage coupled to
25 the expandable tubular member;

an annular valve member defining a third fluid passage fluidicly coupled to the
first and second fluid passages and having a top and a bottom throat passage,
defining second and third radial passages fluidicly coupled to the third fluid passage,
coupled to the second annular support member, and movably coupled to the first
30 annular support member; and

an annular sleeve releasably coupled to the first annular support member and movably coupled to the annular valve member for controllably fluidically coupling the second and third radial passages; and

wherein an annular region is defined by the region between the tubular member and the first annular support member, the second annular support member, the annular valve member, and the annular sleeve;

the method comprising:

positioning the apparatus within the borehole;

injecting fluidic materials into the first, second and third fluid passages;

positioning a bottom plug in the bottom throat passage;

displacing the annular sleeve to fluidically couple the second and third radial passages;

injecting a hardenable fluidic sealing material through the first, second, and third fluid passages, and the second and third radial passages;

displacing the annular sleeve to fluidically decouple the second and third radial passages; and

injecting a non-hardenable fluidic material through the first fluid passage and the one or more first radial passages and pressure sensitive valves into the annular region to radially expand the expandable tubular member.

Preferably, positioning the apparatus within the borehole comprises:

positioning an end of the expandable tubular member adjacent to the bottom of the borehole.

Preferably, the method further comprises: positioning a top plug in the top throat passage.

According to another aspect of the present invention there is provided a method of operating an apparatus for forming a wellbore casing within a borehole within a subterranean formation, the apparatus comprising:

a first annular support member defining a first fluid passage and one or more first radial passages, each of the one or more first radial passages having a pressure sensitive valve fluidically coupled to the first fluid passage;

an annular expansion cone coupled to the first annular support member;
an expandable tubular member movably coupled to the expansion cone;
a second annular support member defining a second fluid passage coupled to
the expandable tubular member;

5 an annular valve member defining a third fluid passage fluidically coupled to the
first and second fluid passages having a top and a bottom throat passage, defining
second and third radial passages fluidically coupled to the third fluid passage, coupled
to the second annular support member, and movably coupled to the first annular
support member; and

10 an annular sleeve releasably coupled to the first annular support member and
movably coupled to the annular valve member for controllably fluidically coupling the
second and third radial passages; and

wherein an annular region is defined by the region between the tubular
member and the first annular support member, the second annular support member,

15 the annular valve member, and the annular sleeve;

the method comprising:



positioning the apparatus within the borehole;



injecting fluidic materials into the first, second and third fluid passages;



positioning a bottom plug in the bottom throat passage;

20 injecting a non-hardenable fluidic material through the first fluid passages and
the first radial passages and pressure sensitive valves into the annular region to
radially expand a portion of the expandable tubular member;



displacing the annular sleeve to fluidically couple the second and third radial
passages;

25 injecting a hardenable fluidic sealing material through the first, second, and
third fluid passages, and the second and third radial passages;

displacing the annular sleeve to fluidically decouple the second and third radial
passages; and

injecting a non-hardenable fluidic material through the first fluid passage and the one or more first radial passages and pressure sensitive valves into the annular region to radially expand another portion of the expandable tubular member.

Preferably, positioning the apparatus within the borehole comprises:

5 positioning an end of the expandable tubular member adjacent to the bottom of the borehole.

Preferably, positioning the apparatus within the borehole comprises:

positioning an end of the expandable tubular member adjacent to a preexisting section of wellbore casing within the borehole.

10 Preferably, injecting a non-hardenable fluidic material into the first fluid passage and one or more first radial passages and pressure sensitive valves to radially expand a portion of the expandable tubular member comprises:

15 injecting a non-hardenable fluidic material into the first fluid passage and the one or more first radial passages and pressure sensitive valves to radially expand the expandable tubular member until an end portion of the tubular member is positioned proximate the bottom of the borehole.

Preferably, the method further comprises positioning a top plug in the top throat passage.

20 According to another aspect of the present invention there is provided an apparatus for coupling an expandable tubular member to a preexisting structure, comprising:

a first annular support member defining a first fluid passage and one or more first radial passages, each of the one or more first radial passages having a pressure sensitive valve fluidically coupled to the first fluid passage;

25 an annular expansion cone coupled to the first annular support member;

a second annular support member defining a second fluid passage coupled to the expandable tubular member;

30 an annular valve member defining a third fluid passage fluidically coupled to the first and second fluid passages having first and second throat passages, defining second and third radial passages fluidically coupled to the third fluid passage, coupled

to the second annular support member, and movably coupled to the first annular support member; and

an annular sleeve releasably coupled to the first annular support member and movably coupled to the annular valve member for controllably fluidicly coupling the
5 second and third radial passages; and


wherein an annular region is defined by the region between the tubular member and the first annular support member, the second annular support member, the annular valve member, and the annular sleeve.


According to another aspect of the present invention there is provided a
10 method of operating an apparatus for coupling an expandable tubular member to a preexisting structure, the apparatus comprising:


a first annular support member defining a first fluid passage and one or more first radial passages, each of the one or more first radial passages having a pressure sensitive valve fluidicly coupled to the first fluid passage;

15 an annular expansion cone coupled to the first annular support member;

an expandable tubular member movably coupled to the expansion cone;

 a second annular support member defining a second fluid passage coupled to the expandable tubular member;

 an annular valve member defining a third fluid passage fluidicly coupled to the
20 first and second fluid passages having a top and a bottom throat passage, defining second and third radial passages fluidicly coupled to the third fluid passage, coupled to the second annular support member, and movably coupled to the first annular support member; and

 an annular sleeve releasably coupled to the first annular support member and
25 movably coupled to the annular valve member for controllably fluidicly coupling the second and third radial passages; and

wherein an annular region is defined by the region between the tubular member and the first annular support member, the second annular support member, the annular valve member, and the annular sleeve;

30 the method comprising:

positioning the apparatus within the preexisting structure;

injecting fluidic materials into the first, second and third fluid passages;

positioning a bottom plug in the bottom throat passage;

displacing the annular sleeve to fluidicly couple the second and third radial

5 passages;

injecting a hardenable fluidic sealing material through the first, second, and third fluid passages, and the second and third radial passages;

displacing the annular sleeve to fluidicly decouple the second and third radial passages; and

10 injecting a non-hardenable fluidic material through the first fluid passage and the one or more first radial passages and pressure sensitive valves into the annular region to radially expand the expandable tubular member.

Preferably, positioning the apparatus within the preexisting structure comprises:

15 positioning an end of the expandable tubular member adjacent to the bottom of the preexisting structure.

Preferably, the method further comprises positioning a top plug in the top throat passage.

20 According to another aspect of the present invention there is provided a method of operating an apparatus for coupling an expandable tubular member to a preexisting structure, the apparatus comprising:

a first annular support member defining a first fluid passage and one or more first radial passages, each of the one or more first radial passages having a pressure sensitive valve fluidicly coupled to the first fluid passage;

25 an annular expansion cone coupled to the first annular support member;

an expandable tubular member movably coupled to the expansion cone;

a second annular support member defining a second fluid passage coupled to the expandable tubular member;

30 an annular valve member defining a third fluid passage fluidicly coupled to the first and second fluid passages having a top and a bottom throat passage, defining

second and third radial passages fluidically coupled to the third fluid passage, coupled to the second annular support member, and movably coupled to the first annular support member; and

- 5 an annular sleeve releasably coupled to the first annular support member and movably coupled to the annular valve member for controllably fluidically coupling the second and third radial passages; and

wherein an annular region is defined by the region between the tubular member and the first annular support member, the second annular support member, the annular valve member, and the annular sleeve;

- 10 the method comprising:


positioning the apparatus within the preexisting structure;

injecting fluidic materials into the first, second and third fluid passages;

positioning a bottom plug in the bottom throat passage;

injecting a non-hardenable fluidic material through the first fluid passages and

- 15 the first radial passages and pressure sensitive valves into the annular region to radially expand a portion of the expandable tubular member;



displacing the annular sleeve to fluidically couple the second and third radial passages;



- 20 injecting a hardenable fluidic sealing material through the first, second, and third fluid passages, and the second and third radial passages;

displacing the annular sleeve to fluidically decouple the second and third radial passages; and



- 25 injecting a non-hardenable fluidic material through the first fluid passage and the one or more first radial passages and pressure sensitive valves into the annular region to radially expand another portion of the expandable tubular member.

Preferably, positioning the apparatus within the preexisting structure comprises:

positioning an end of the expandable tubular member adjacent to the bottom of the preexisting structure.

Preferably, positioning the apparatus within the preexisting structure comprises:

positioning an end of the expandable tubular member adjacent to a preexisting section of a structural element within the preexisting structure.

5 Preferably, injecting a non-hardenable fluidic material into the first fluid passage and the one or more first radial passages and pressure sensitive valves to radially expand a portion of the expandable tubular member comprises:

10 injecting a non-hardenable fluidic material into the first fluid passage and one or more first radial passages and pressure sensitive valves to radially expand the expandable tubular member until an end portion of the tubular member is positioned proximate the bottom of the preexisting structure.

Preferably, the method further comprises positioning a top plug in the top throat passage.

Brief Description of the Drawings

15 Figs. 1 and 1a-1c are cross sectional illustrations of a liner hanger assembly including a sliding sleeve valve assembly.

Figs. 2a-2b is a flow chart illustration of a method for forming a wellbore casing using the liner hanger assembly of Figs. 1 and 1a-1c.

20 Figs. 3a-3c are cross sectional illustrations of the placement of the liner hanger assembly of Figs. 1 and 1a-1c into a wellbore.

Figs. 4a-4c are cross sectional illustrations of the injection of fluidic materials into the liner hanger assembly of Figs. 3a-3c.

Figs. 5a-5c are cross sectional illustrations of the placement of a bottom plug into the liner hanger assembly of Figs. 4a-4c.

25 Figs. 6a-6c are cross sectional illustrations of the downward displacement of sliding sleeve of the liner hanger assembly of Figs. 5a-5c.

Figs. 7a-7c are cross sectional illustrations of the injection of a hardenable fluidic sealing material into the liner hanger assembly of Figs. 6a-6c that bypasses the plug.

Figs. 8a-8c are cross sectional illustrations of the placement of a top plug into the liner hanger assembly of Figs. 7a-7c.

Figs. 9a-9c are cross sectional illustrations of the upward displacement of sliding sleeve of the liner hanger assembly of Figs. 8a-8c.

- 5 Figs. 10a-10c are cross sectional illustrations of the injection of a pressurized fluidic material into the liner hanger assembly of Figs. 9a-9c in order to radially expand and plastically deform the expansion cone launcher.

Figs. 11a-11b is a flow chart illustration of a method for forming a wellbore casing using the liner hanger assembly of Figs. 1 and 1a-1c.

- 10 Figs. 12a-12c are cross sectional illustrations of the injection of a pressurized fluidic material into the liner hanger assembly of Figs. 5a-5c in order to at least partially radially expand and plastically deform the expansion cone launcher.

Figs. 13a-13c are cross sectional illustrations of the downward displacement of the sliding sleeve of the liner hanger assembly of Figs. 12a-12c.

- 15 Figs. 14a-14c are cross sectional illustrations of the injection of a hardenable fluidic sealing material through the liner hanger assembly of Figs. 13a-13c.

Figs. 15a-15c are cross sectional illustrations of the injection and placement of a top plug into the liner hanger assembly of Figs. 14a-14c.


- 20 Figs. 16a-16c are cross sectional illustrations of the upward displacement of the sliding sleeve of the liner hanger assembly of Figs. 15a-15c.

Figs. 17a-17c are cross sectional illustrations of the injection of a pressurized fluidic material into the liner hanger assembly of Figs. 16a-16c in order to complete the radial expansion of the expansion cone launcher.

- 25 Figs. 18, 18a, 18b, and 18c are cross sectional illustrations of a liner hanger assembly including a sliding sleeve valve assembly.

Figs. 19a-19b is a flow chart illustration of a method for forming a wellbore casing using the liner hanger assembly of Figs. 18 and 18a-18c.

Figs. 20a-20c are cross sectional illustrations of the placement of the liner hanger assembly of Figs. 18 and 18a-18c into a wellbore.



Figs. 21a-21c are cross sectional illustrations of the injection of a fluidic materials into the liner hanger assembly of Figs. 20a-20c.

Figs. 22a-22c are cross sectional illustrations of the placement of a bottom plug into the liner hanger assembly of Figs. 21a-21c.

5 Figs. 23a-23c are cross sectional illustrations of the downward displacement of sliding sleeve of the liner hanger assembly of Figs. 22a-22c.

Figs. 24a-24c are cross sectional illustrations of the injection of a hardenable fluidic sealing material into the liner hanger assembly of Figs. 23a-23c that bypasses the bottom plug.

10 Figs. 25a-25c are cross sectional illustrations of the placement of a top plug into the liner hanger assembly of Figs. 24a-24c.

Figs. 26a-26c are cross sectional illustrations of the upward displacement of sliding sleeve of the liner hanger assembly of Figs. 25a-25c.

15 Figs. 27a-27c are cross sectional illustrations of the injection of a pressurized fluidic material into the liner hanger assembly of Figs. 26a-26c in order to radially expand and plastically deform the expansion cone launcher.

Figs. 28a-28b is a flow chart illustration of a method for forming a wellbore casing using the liner hanger assembly of Figs. 18 and 18a-18c.


20 Figs. 29a-29c are cross sectional illustrations of the injection of a pressurized fluidic material into the liner hanger assembly of Figs. 22a-22c in order to at least partially radially expand and plastically deform the expansion cone launcher.

Figs. 30a-30c are cross sectional illustrations of the downward displacement of the sliding sleeve of the liner hanger assembly of Figs. 29a-29c.

25 Figs. 31a-31c are cross sectional illustrations of the injection of a hardenable fluidic sealing material through the liner hanger assembly of Figs. 30a-30c.

Figs. 32a-32c are cross sectional illustrations of the injection and placement of a top plug into the liner hanger assembly of Figs. 31a-31c.

Figs. 33a-33c are cross sectional illustrations of the upward displacement of the sliding sleeve of the liner hanger assembly of Figs. 32a-32c.



Figs. 34a-34c are cross sectional illustrations of the injection of a pressurized fluidic material into the liner hanger assembly of Figs. 33a-33c in order to complete the radial expansion of the expansion cone launcher.


5

Detailed Description

A liner hanger assembly having a sliding sleeve bypass valve is provided. The liner hanger assembly provides a method and apparatus for forming or repairing a wellbore casing, a pipeline or a structural support.

Referring initially to Figs. 1, 1a, 1b, and 1c, a liner hanger assembly 10 includes a first tubular support member 12 defining an internal passage 12a that includes a threaded counterbore 12b at one end, and a threaded counterbore 12c at another end. A second tubular support member 14 defining an internal passage 14a includes a first threaded portion 14b at a first end that is coupled to the threaded counterbore 12c of the first tubular support member 12, a stepped flange 14c, a counterbore 14d, a threaded portion 14e, and internal splines 14f at another end. The stepped flange 14c of the second tubular support member 14 further defines radial passages 14g, 14h, 14i, and 14j. A third tubular support member 16 defining an internal passage 16a for receiving the second tubular support member 14 includes a first flange 16b, a second flange 16c, a first counterbore 16d, a second counterbore 16e having an internally threaded portion 16f, and an internal flange 16g. The second flange 16c further includes radial passages 16h and 16i.


An annular expansion cone 18 defining an internal passage 18a for receiving the second and third tubular support members, 14 and 16, includes a counterbore 18b at one end, and a counterbore 18c at another end for receiving the flange 16b of the second tubular support member 16. The annular expansion cone 18 further includes an end face 18d that mates with an end face 16j of the flange 16c of the second tubular support member 16, and an exterior surface 18e having a conical shape in order to facilitate the radial expansion of tubular members. A tubular expansion cone launcher 20 is movably coupled to the exterior surface 18e of the expansion cone 18 and includes a first portion 20a having a first wall thickness, a



second portion 20b having a second wall thickness, a threaded portion 20c at one end, and a threaded portion 20d at another end. The second portion 20b of the expansion cone launcher 20 mates with the conical outer surface 18e of the expansion cone 18. The second wall thickness is less than the first wall thickness in order to optimize the radial expansion of the expansion cone launcher 20 by the relative axial displacement of the expansion cone 18. One or more expandable tubulars are coupled to the threaded connection 20c of the expansion cone launcher 20. In this manner, the assembly 10 may be used to radially expand and plastically deform, for example, thousands of feet of expandable tubulars.

10 An annular spacer 22 defining an internal passage 22a for receiving the second tubular support member 14 is received within the counterbore 18b of the expansion cone 18, and is positioned between an end face 12d of the first tubular support member 12 and an end face of the counterbore 18b of the expansion cone 18. A fourth tubular support member 24 defining an internal passage 24a for receiving the second tubular support member 14 includes a flange 24b that is received within the counterbore 16d of the third tubular support member 16. A fifth tubular support member 26 defining an internal passage 26a for receiving the second tubular support member 14 includes an internal flange 26b for mating with the flange 14c of the second tubular support member and a flange 26c for mating with the internal flange 16g of the third tubular support member 16.


25 An annular sealing member 28, an annular sealing and support member 30, an annular sealing member 32, and an annular sealing and support member 34 are received within the counterbore 14d of the second tubular support member 14. The annular sealing and support member 30 further includes a radial opening 30a for supporting a rupture disc 36 within the radial opening 14g of the second tubular support member 14 and a sealing member 30b for sealing the radial opening 14h of the second tubular support member. The annular sealing and support member 34 further includes sealing members 34a and 34b for sealing the radial openings 14i and 14j, respectively, of the second tubular support member 14. The rupture disc 36 opens when the operating pressure within the radial opening 30b is about 6,894.745



to 34,473.724 KPa (1000 to 5000 psi). In this manner, the rupture disc 36 provides a pressure sensitive valve for controlling the flow of fluidic materials through the radial opening 30a. Alternatively, the assembly 10 includes a plurality of radial passages 30a, each with corresponding rupture discs 36.

5 A sixth tubular support member 38 defining an internal passage 38a for receiving the second tubular support member 14 includes a threaded portion 38b at one end that is coupled to the threaded portion 16f of the third tubular support member 16 and a flange 38c at another end that is movably coupled to the interior of the expansion cone launcher 20. An annular collet 40 includes a threaded portion
10 40a that is coupled to the threaded portion 14e of the second tubular support member 14, and a resilient coupling 40b at another end.

 An annular sliding sleeve 42 defining an internal passage 42a includes an internal flange 42b, having sealing members 42c and 42d, and an external groove 42e for releasably engaging the coupling 40b of the collet 40 at one end, and an
15 internal flange 42f, having sealing members 42g and 42h, at another end. During operation the coupling 40b of the collet 40 may engage the external groove 42e of the sliding sleeve 42 and thereby displace the sliding sleeve in the longitudinal direction. Since the coupling 40b of the collet 40 is resilient, the collet 40 may be disengaged or reengaged with the sliding sleeve 42. An annular valve member 44
20 defining an internal passage 44a, having a first throat 44aa and a second throat 44ab, includes a flange 44b at one end, having external splines 44c for engaging the internal splines 14f of the second tubular support member 14, a first set of radial passages, 44da and 44db, a second set of radial passages, 44ea and 44eb, and a threaded portion 44f at another end. The sliding sleeve 42 and the valve member 44
25 define an annular bypass passage 46 that, depending upon the position of the sliding sleeve 42, permits fluidic materials to flow from the passage 44 through the first radial passages, 44da and 44db, the bypass passage 46, and the second radial passages, 44ea and 44eb, back into the passage 44. In this manner, fluidic materials may bypass the portion of the passage 44 between the first and second radial
30 passages, 44ea, 44eb, 44da, and 44db. Furthermore, the sliding sleeve 42 and the




valve member 44 together define a sliding sleeve valve for controllably permitting fluidic materials to bypass the intermediate portion of the passage 44a between the first and second passages, 44da, 44db, 44ea, and 44eb. During operation, the flange 44b limits movement of the sliding sleeve 42 in the longitudinal direction.

5 The collet 40 includes a set of couplings 40b such as, for example, fingers, that engage the external groove 42e of the sliding sleeve 42. During operation, the collet couplings 40b latch over and onto the external groove 42e of the sliding sleeve 42. A longitudinal force of at least about 4.448 to 57.827 kN (10,000 to 13,000 lbf) is required to pull the couplings 40b off of, and out of engagement with, the external
10 groove 42e of the sliding sleeve 42. The application of a longitudinal force less than about 4.448 to 57.827 kN (10,000 to 13,000 lbf) indicates that the collet couplings 40b are latched onto the external shoulder of the sliding sleeve 42, and that the sliding sleeve 42 is in the up or the down position relative to the valve member 44. The collet 40 includes a conventional internal shoulder that transfers the weight of
15 the first tubular support member 12 and expansion cone 18 onto the sliding sleeve 42. The collet 40 further includes a conventional set of internal lugs for engaging the splines 44c of the valve member 44.


 An annular valve seat 48 defining a conical internal passage 48a for receiving a conventional float valve element 50 includes an annular recess 48b, having an
20 internally threaded portion 48c for engaging the threaded portion 44f of the valve member 44, at one end, and an externally threaded portion 48d at another end. Alternatively, the float valve element 50 is omitted. An annular valve seat mounting element 52 defining an internal passage 52a for receiving the valve seat 48 and float
25 valve 50 includes an internally threaded portion 52b for engaging the externally threaded portion 48d of the valve seat 48, an externally threaded portion 52c, an internal flange 52d, radial passages, 52ea and 52eb, and an end member 52f, having axial passages, 52fa and 52fb.

 A shoe 54 defining an internal passage 54a for receiving the valve seat mounting element 52 includes a first annular recess 54b, having an externally
30 threaded portion 54c, and a second annular recess 54d, having an externally threaded



portion 54e for engaging the threaded portion 20d of the expansion cone launcher 20, at one end, a first threaded counterbore 54f for engaging the threaded portion 52c of the of the mounting element, and a second counterbore 54g for mating with the end member 52f of the mounting element. The shoe 54 is fabricated from a ceramic and/or a composite material in order to facilitate the subsequent removal of the shoe by drilling. A seventh tubular support member 56 defining an internal passage 56a for receiving the sliding sleeve 42 and the valve member 44 is positioned within the expansion cone launcher 20 that includes an internally threaded portion 56b at one end for engaging the externally threaded portion 54c of the annular recess 54b of the shoe 54. During operation of the assembly, the end of the seventh tubular support member 56 limits the longitudinal movement of the expansion cone 18 in the direction of the shoe 54 by limiting the longitudinal movement of the sixth tubular support member 38. An annular centralizer 58 defining an internal passage 58a for movably supporting the sliding sleeve 42 is positioned within the seventh tubular support member 56 that includes axial passages 58b and 58c. The centralizer 58 maintains the sliding sleeve 42 and valve member 44 in a central position within the assembly 10.

Referring to Figs. 2a-2b, during operation, the assembly 10 may be used to form or repair a wellbore casing by implementing a method 200 in which, as illustrated in Figs. 3a-3c, the assembly 10 may initially be positioned within a wellbore 100 having a preexisting wellbore casing 102 by coupling a conventional tubular member 104 defining an internal passage 104a to the threaded portion 12b of the first tubular support member 12 in step 202. During placement of the assembly 10 within the wellbore 100, fluidic materials 106 within the wellbore 100 below the assembly 10 are conveyed through the assembly 10 and into the passage 104a by the fluid passages 52fa, 52fb, 54a, 48a, 44a, and 14a. In this manner, surge pressures that can be created during placement of the assembly 10 within the wellbore 100 are minimized. The float valve element 50 is pre-set in an auto-fill configuration to permit the fluidic materials 106 to pass through the conical passage 48a of the valve seat 48.




Referring to Figs. 4a-4c, in step 204, fluidic materials 108 may then be injected into and through the tubular member 104 and assembly 10 to thereby ensure that all of the fluid passages 104a, 14a, 44a, 48a, 54a, 52fa, and 52fb are functioning properly.

5 Referring to Figs. 5a-5c, in step 206, a bottom plug 110 may then be injected into the fluidic materials 108 and into the assembly 10 and then positioned in the throat passage 44ab of the valve member 44. In this manner, the region of the passage 44a upstream from the plug 110 may be fluidically isolated from the region of the passage 44a downstream from the plug 110. The proper placement of the plug
10 110 may be indicated by a corresponding increase in the operating pressure of the fluidic material 108.

Referring to Figs. 6a-6c, in step 208, the sliding sleeve 42 may then be displaced relative to the valve member 44 by displacing the tubular member 104 by applying, for example, a downward force of approximately 5,000 lbf on the
15 assembly 10. In this manner, the tubular member 104, the first tubular support member 12, the second tubular support member 14, the third tubular support member 16, the expansion cone 18, the annular spacer 22, the fourth tubular support member 24, the fifth tubular support member 26, the sixth tubular support member 38, the collet 40, and the sliding sleeve 42 are displaced in the longitudinal direction
20 relative to the expansion cone launcher 20 and the valve member 44. In this manner, fluidic materials within the passage 44a upstream of the plug 110 may bypass the plug by passing through the first passages, 44da and 44db, through the annular passage 46, and through the second passages, 44ea and 44eb, into the region of the passage 44a downstream from the plug. Furthermore, in this manner, the
25 rupture disc 36 is fluidically isolated from the passages 14a and 44a.

Referring to Figs. 7a-7c, in step 210, a hardenable fluidic sealing material 112 may then be injected into the assembly 10 and conveyed through the passages 104a, 14a, 44a, 44da, 44db, 46, 44ea, 44eb, 48a, 54a, 52fa, and 52fb into the wellbore 100. In this manner, a hardenable fluidic sealing material such as, for
30 example, cement, may be injected into the annular region between the expansion



cone launcher 20 and the wellbore 100 in order to subsequently form an annular body of cement around the radially expanded expansion cone launcher 20.

Furthermore, in this manner, the radial passage 30a and the rupture disc 36 are not exposed to the hardenable fluidic sealing material 112.

5 Referring to Figs. 8a-8c, in step 212, upon the completion of the injection of the hardenable fluidic sealing material 112, a nonhardenable fluidic material 114 may be injected into the assembly 10, and a top plug 116 may then be injected into the assembly 10 along with the fluidic materials 114 and then positioned in the throat passage 44aa of the valve member 44. In this manner, the region of the
10 passage 44a upstream from the first passages, 44da and 44db, may be fluidically isolated from the first passages. The proper placement of the plug 116 may be indicated by a corresponding increase in the operating pressure of the fluidic material 114.

Referring to Fig. 9a-9c, in step 214, the sliding sleeve 42 may then be
15 displaced relative to the valve member 44 by displacing the tubular member 104 by applying, for example, an upward force of approximately 57.827 kN (13,000 lbf) on the assembly 10. In this manner, the tubular member 104, the first tubular support member 12, the second tubular support member 14, the third tubular support member 16, the expansion cone 18, the annular spacer 22, the fourth tubular support
20 member 24, the fifth tubular support member 26, the sixth tubular support member 38, the collet 40, and the sliding sleeve 42 are displaced in the longitudinal direction relative to the expansion cone launcher 20 and the valve member 44. In this manner, fluidic materials within the passage 44a upstream of the plug 110 may no longer bypass the plug by passing through the first passages, 44da and 44db, through
25 the annular passage 46, and through the second passages, 44ea and 44eb, into the region of the passage 44a downstream from the plug. Furthermore, in this manner, the rupture disc 36 is no longer fluidically isolated from the fluid passages 14a and 44a.

Referring to Figs. 10a-10c, in step 216, the fluidic material 114 may be
30 injected into the assembly 10. The continued injection of the fluidic material 114




may increase the operating pressure within the passages 14a and 44a until the burst disc 36 is opened thereby permitting the pressurized fluidic material 114 to pass through the radial passage 30a and into an annular region 118 defined by the second tubular support member 14, the third tubular support member 16, the sixth tubular support member 38, the collet 40, the sliding sleeve 42, the shoe 54, and the seventh tubular support member 56. The pressurized fluidic material 114 within the annular region 118 directly applies a longitudinal force upon the fifth tubular support member 26 and the sixth tubular support member 38. The longitudinal force in turn is applied to the expansion cone 18. In this manner, the expansion cone 18 is displaced relative to the expansion cone launcher 20 thereby radially expanding and plastically deforming the expansion cone launcher.

Alternatively in the method 200, the injection and placement of the top plug 116 into the liner hanger assembly 10 in step 212 may be omitted.

Alternatively, in the method 200, in step 202, the assembly 10 is positioned at the bottom of the wellbore 100.

As illustrated in Figs. 11a-11b, during operation, the assembly 10 may be used to form or repair a wellbore casing by implementing a method 250 in which, as illustrated in Figs. 3a-3c, the assembly 10 may initially be positioned within a wellbore 100 having a preexisting wellbore casing 102 by coupling a conventional tubular member 104 defining an internal passage 104a to the threaded portion 12b of the first tubular support member 12 in step 252. During placement of the assembly 10 within the wellbore 100, fluidic materials 106 within the wellbore 100 below the assembly 10 are conveyed through the assembly 10 and into the passage 104a by the fluid passages 52fa, 52fb, 54a, 48a, 44a, and 14a. In this manner, surge pressures that can be created during placement of the assembly 10 within the wellbore 100 are minimized. The float valve element 50 is pre-set in an auto-fill configuration to permit the fluidic materials 106 to pass through the conical passage 48a of the valve seat 48.

Referring to Figs. 4a-4c, in step 254, fluidic materials 108 may then be injected into and through the tubular member 104 and assembly 10 to thereby ensure




that all of the fluid passages 104a, 14a, 44a, 48a, 54a, 52fa, and 52fb are functioning properly.

Referring to Figs. 5a-5c, in step 256, the bottom plug 110 may then be injected into the fluidic materials 108 and into the assembly 10 and then positioned in the throat passage 44ab of the valve member 44. In this manner, the region of the passage 44a upstream from the plug 110 may be fluidically isolated from the region of the passage 44a downstream from the plug 110. The proper placement of the plug 110 may be indicated by a corresponding increase in the operating pressure of the fluidic material 108.

Referring to Figs. 12a-12c, in step 258, a fluidic material 114 may then be injected into the assembly to thereby increase the operating pressure within the passages 14a and 44a until the burst disc 36 is opened thereby permitting the pressurized fluidic material 114 to pass through the radial passage 30a and into an annular region 118 defined by the second tubular support member 14, the third tubular support member 16, the sixth tubular support member 38, the collet 40, the sliding sleeve 42, the shoe 54, and the seventh tubular support member 56. The pressurized fluidic material 114 within the annular region 118 directly applies a longitudinal force upon the fifth tubular support member 26 and the sixth tubular support member 38. The longitudinal force in turn is applied to the expansion cone 18. In this manner, the expansion cone 18 is displaced relative to the expansion cone launcher 20 thereby disengaging the collet 40 and the sliding sleeve 42 and radially expanding and plastically deforming the expansion cone launcher. The radial expansion process in step 408 is continued to a location below the overlap between the expansion cone launcher 20 and the preexisting wellbore casing 102.


Referring to Figs. 13a-13c, in step 260, the sliding sleeve 42 may then be displaced relative to the valve member 44 by (1) displacing the expansion cone 18 in a downward direction using the tubular member 104 and (2) applying, using the tubular member 104 a downward force of, for example, approximately 2.224 kN (5,000 lbf) on the assembly 10. In this manner, the coupling 40b of the collet 40 reengages the external groove 42e of the sliding sleeve 42. Furthermore, in this



manner, the tubular member 104, the first tubular support member 12, the second tubular support member 14, the third tubular support member 16, the expansion cone 18, the annular spacer 22, the fourth tubular support member 24, the fifth tubular support member 26, the sixth tubular support member 38, the collet 40, and the sliding sleeve 42 are displaced in the longitudinal direction relative to the expansion cone launcher 20 and the valve member 44. In this manner, fluidic materials within the passage 44a upstream of the plug 110 may bypass the plug by passing through the first passages, 44da and 44db, through the annular passage 46, and through the second passages, 44ea and 44eb, into the region of the passage 44a downstream from the plug. Furthermore, in this manner, the fluid passage 30a is fluidically isolated from the passages 14a and 44a.

Referring to Figs. 14a-14c, in step 262, the hardenable fluidic sealing material 112 may then be injected into the assembly 10 and conveyed through the passages 104a, 14a, 44a, 44da, 44db, 46, 44ea, 44eb, 48a, 54a, 52fa, and 52fb into the wellbore 100. In this manner, a hardenable fluidic sealing material such as, for example, cement, may be injected into the annular region between the expansion cone launcher 20 and the wellbore 100 in order to subsequently form an annular body of cement around the radially expanded expansion cone launcher 20. Furthermore, in this manner, the radial passage 30a and the rupture disc 36 are not exposed to the hardenable fluidic sealing material 112.

Referring to Figs. 15a-15c, in step 264, upon the completion of the injection of the hardenable fluidic sealing material 112, the nonhardenable fluidic material 114 may be injected into the assembly 10, and the top plug 116 may then be injected into the assembly 10 along with the fluidic materials 114 and then positioned in the throat passage 44aa of the valve member 44. In this manner, the region of the passage 44a upstream from the first passages, 44da and 44db, may be fluidically isolated from the first passages. The proper placement of the plug 116 may be indicated by a corresponding increase in the operating pressure of the fluidic material 114.




Referring to Figs. 16a-16c, in step 266, the sliding sleeve 42 may then be displaced relative to the valve member 44 by displacing the tubular member 104 by applying, for example, an upward force of approximately 57.827 kN (13,000 lbf) on the assembly 10. In this manner, the tubular member 104, the first tubular support member 12, the second tubular support member 14, the third tubular support member 16, the expansion cone 18, the annular spacer 22, the fourth tubular support member 24, the fifth tubular support member 26, the sixth tubular support member 38, the collet 40, and the sliding sleeve 42 are displaced in the longitudinal direction relative to the expansion cone launcher 20 and the valve member 44. In this manner, fluidic materials within the passage 44a upstream of the plug 110 may no longer bypass the plug by passing through the first passages, 44da and 44db, through the annular passage 46, and through the second passages, 44ea and 44eb, into the region of the passage 44a downstream from the plug. Furthermore, in this manner, the passage 30a is no longer fluidically isolated from the fluid passages 14a and 44a.

Referring to Figs. 17a-17c, in step 268, the fluidic material 114 may be injected into the assembly 10. The continued injection of the fluidic material 114 may increase the operating pressure within the passages 14a, 30a, and 44a and the annular region 118. The pressurized fluidic material 114 within the annular region 118 directly applies a longitudinal force upon the fifth tubular support member 26 and the sixth tubular support member 38. The longitudinal force in turn is applied to the expansion cone 18. In this manner, the expansion cone 18 is displaced relative to the expansion cone launcher 20 thereby completing the radial expansion of the expansion cone launcher.

Alternatively, in the method 250, the injection and placement of the top plug 116 into the liner hanger assembly 10 in step 264 may be omitted.

Alternatively, in the method 250, in step 252, the assembly 10 is positioned at the bottom of the wellbore 100.

Alternatively, in the method 250: (1) in step 252, the assembly 10 is positioned proximate a position below a preexisting section of the wellbore casing 102, and (2) in step 258, the expansion cone launcher 20, and any expandable



tubulars coupled to the threaded portion 20c of the expansion cone launcher, are radially expanded and plastically deformed until the shoe 54 of the assembly 10 is proximate the bottom of the wellbore 100. In this manner, the radial expansion process using the assembly 10 provides a telescoping of the radially expanded tubulars into the wellbore 100.

The assembly 10 may be operated to form a wellbore casing by including or excluding the float valve 50.

The float valve 50 may be operated in an auto-fill configuration in which tabs are positioned between the float valve 50 and the valve seat 48. In this manner, fluidic materials within the wellbore 100 may flow into the assembly 10 from below thereby decreasing surge pressures during placement of the assembly 10 within the wellbore 100. Furthermore, pumping fluidic materials through the assembly 10 at rate of about 1.2 to 2m³/min (6 to 8 bbl/min) will displace the tabs from the valve seat 48 and thereby allow the float valve 50 to close.

Prior to the placement of any of the plugs, 110 and 116, into the assembly 10, fluidic materials can be circulated through the assembly 10 and into the wellbore 100.


Once the bottom plug 110 has been positioned into the assembly 10, fluidic materials can only be circulated through the assembly 10 and into the wellbore 100 if the sliding sleeve 42 is in the down position.

Once the sliding sleeve 42 is positioned in the down position, the passage 30a and rupture disc 36 are fluidically isolated from pressurized fluids within the assembly 10.

Once the top plug 116 has been positioned into the assembly 10, no fluidic materials can be circulated through the assembly 10 and into the wellbore 100.

The assembly 10 may be operated to form or repair a wellbore casing, a pipeline, or a structural support.


Referring to Figs. 18, 18a, 18b, and 18c, a liner hanger assembly 300 includes a first tubular support member 312 defining an internal passage 312a that includes a threaded counterbore 312b at one end, and a threaded counterbore 312c at



another end. A second tubular support member 314 defining an internal passage 314a includes a first threaded portion 314b at a first end that is coupled to the threaded counterbore 312c of the first tubular support member 312, a stepped flange 314c, a counterbore 314d, a threaded portion 314e, and internal splines 314f at another end. The stepped flange 314c of the second tubular support member 314 further defines radial passages 314g, 314h, 314i, and 314j.

A third tubular support member 316 defining an internal passage 316a for receiving the second tubular support member 314 includes a first flange 316b, a second flange 316c, a first counterbore 316d, a second counterbore 316e having an internally threaded portion 316f, and an internal flange 316g. The second flange 316c further includes radial passages 316h and 316i.

An annular expansion cone 318 defining an internal passage 318a for receiving the second and third tubular support members, 314 and 316, includes a counterbore 318b at one end, and a counterbore 318c at another end for receiving the flange 316b of the second tubular support member 316. The annular expansion cone 318 further includes an end face 318d that mates with an end face 316j of the flange 316c of the second tubular support member 316, and an exterior surface 318e having a conical shape in order to facilitate the radial expansion of tubular members. A tubular expansion cone launcher 320 is movably coupled to the exterior surface 318e of the expansion cone 318 and includes a first portion 320a having a first wall thickness, a second portion 320b having a second wall thickness, a threaded portion 320c at one end, and a threaded portion 320d at another end. The second portion 320b of the expansion cone launcher 320 mates with the conical outer surface 318e of the expansion cone 318. The second wall thickness of the second portion 320b is less than the first wall thickness of the first portion 320a in order to optimize the radial expansion of the expansion cone launcher 320 by the relative axial displacement of the expansion cone 318. One or more expandable tubulars are coupled to the threaded connection 320c of the expansion cone launcher 320. In this manner, the assembly 300 may be used to radially expand and plastically deform, for example, thousands of feet of expandable tubulars.



An annular spacer 322 defining an internal passage 322a for receiving the second tubular support member 314 is received within the counterbore 318b of the expansion cone 318, and is positioned between an end face 312d of the first tubular support member 312 and an end face of the counterbore 318b of the expansion cone 318. A fourth tubular support member 324 defining an internal passage 324a for receiving the second tubular support member 314 includes a flange 324b that is received within the counterbore 316d of the third tubular support member 316. A fifth tubular support member 326 defining an internal passage 326a for receiving the second tubular support member 314 includes an internal flange 326b for mating with the flange 314c of the second tubular support member and a flange 326c for mating with the internal flange 316g of the third tubular support member 316.

An annular sealing member 328, an annular sealing and support member 330, an annular sealing member 332, and an annular sealing and support member 334 are received within the counterbore 314d of the second tubular support member 314. The annular sealing and support member 330 further includes a radial opening 330a for supporting a rupture disc 336 within the radial opening 314g of the second tubular support member 314 and a sealing member 330b for sealing the radial opening 314h of the second tubular support member. The annular sealing and support member 334 further includes sealing members 334a and 334b for sealing the radial openings 314i and 314j, respectively, of the second tubular support member 314. The rupture disc 336 opens when the operating pressure within the radial opening 330b is about 6,894.745 to 34,473.724 KPa (1000 to 5000 psi). In this manner, the rupture disc 336 provides a pressure sensitive valve for controlling the flow of fluidic materials through the radial opening 330a. Alternatively, the assembly 300 includes a plurality of radial passages 330a, each with corresponding rupture discs 336.


A sixth tubular support member 338 defining an internal passage 338a for receiving the second tubular support member 314 includes a threaded portion 338b at one end that is coupled to the threaded portion 316f of the third tubular support member 316 and a flange 338c at another end that is movably coupled to the interior

of the expansion cone launcher 320. An annular collet 340 includes a threaded portion 340a that is coupled to the threaded portion 314e of the second tubular support member 314, and a resilient coupling 340b at another end.

An annular sliding sleeve 342 defining an internal passage 342a includes an
5 internal flange 342b, having sealing members 342c and 342d, and an external groove 342e for releasably engaging the coupling 340b of the collet 340 at one end, and an internal flange 342f, having sealing members 342g and 342h, at another end. During operation, the coupling 340b of the collet 340 may engage the external groove 342e of the sliding sleeve 342 and thereby displace the sliding sleeve in the
10 longitudinal direction. Since the coupling 340b of the collet 340 is resilient, the collet 340 may be disengaged or reengaged with the sliding sleeve 342. An annular valve member 344 defining an internal passage 344a, having a throat 344aa, includes a flange 344b at one end, having external splines 344c for engaging the internal splines 314f of the second tubular support member 314, an interior flange
15 344d having a first set of radial passages, 344da and 344db, and a counterbore 344e, a second set of radial passages, 344fa and 344fb, and a threaded portion 344g at another end.

An annular valve member 346 defining an internal passage 346a, having a throat 346aa, includes an end portion 346b that is received in the counterbore 344e
20 of the annular valve member 344, a set of radial openings, 346ca and 346cb, and a flange 346d at another end. An annular valve member 348 defining an internal passage 348a for receiving the annular valve members 344 and 346 includes a flange 348b having a threaded counterbore 348c at one end for engaging the threaded portion 344g of the annular valve member, a counterbore 348d for mating with the
25 flange 346d of the annular valve member, and a threaded annular recess 348e at another end.

The annular valve members 344, 346, and 348 define an annular passage 350 that fluidically couples the radial passages 344fa, 344fb, 346ca, and 346cb. Furthermore, depending upon the position of the sliding sleeve 342, the fluid
30 passages, 344da and 344db, may be fluidically coupled to the passages 344fa, 344fb,




346ca, 346cb, and 350. In this manner, fluidic materials may bypass the portion of the passage 346a between the passages 344da, 344db, 346ca, and 346cb.

Furthermore, the sliding sleeve 342 and the valve members 344, 346, and 348 together define a sliding sleeve valve for controllably permitting fluidic materials to
5 bypass the intermediate portion of the passage 346a between the passages, 344da, 344db, 346ca, and 346cb. During operation of the sliding sleeve valve, the flange 348b limits movement of the sliding sleeve 342 in the longitudinal direction.

The collet 340 includes a set of couplings 340b that engage the external groove 342e of the sliding sleeve 342. During operation, the collet couplings 340b
10 latch over and onto the external groove 342e of the sliding sleeve 342. A longitudinal force of at least about 4.448 to 57.827 kN (10,000 to 13,000 lbf) is required to pull the couplings 340b off of, and out of engagement with, the external groove 342e of the sliding sleeve 342. The application of a longitudinal force less than about 4.448 to 57.827 kN (10,000 to 13,000 lbf) indicates that the collet
15 couplings 340b are latched onto the external shoulder of the sliding sleeve 342, and that the sliding sleeve 342 is in the up or the down position relative to the valve member 344. The collet 340 includes a conventional internal shoulder that transfers the weight of the first tubular support member 312 and expansion cone 318 onto the sliding sleeve 342. The collet 340 further includes a conventional set of internal
20 lugs for engaging the splines 344c of the valve member 344.


An annular valve seat 352 defining a conical internal passage 352a for receiving a conventional float valve element 354 includes a threaded annular recess 352b for engaging the threaded portion 348e of the valve member 348, at one end, and an externally threaded portion 352c at another end. Alternatively, the float
25 valve element 354 is omitted. An annular valve seat mounting element 356 defining an internal passage 356a for receiving the valve seat 352 and float valve 354 includes an internally threaded portion 356b for engaging the externally threaded portion 352c of the valve seat 352, an externally threaded portion 356c, an internal flange 356d, radial passages, 356ea and 356eb, and an end member 356f, having
30 axial passages, 356fa and 356fb.



A shoe 358 defining an internal passage 358a for receiving the valve seat mounting element 356 includes a first threaded annular recess 358b, and a second threaded annular recess 358c for engaging the threaded portion 320d of the expansion cone launcher 320, at one end, a first threaded counterbore 358d for
5 engaging the threaded portion 356c of the of the valve seat mounting element, and a second counterbore 358e for mating with the end member 356f of the mounting element. The shoe 358 is fabricated from a ceramic and/or a composite material in order to facilitate the subsequent removal of the shoe by drilling.

A seventh tubular support member 360 defining an internal passage 360a for
10 receiving the sliding sleeve 342 and the valve members 344, 346, and 348 is positioned within the expansion cone launcher 320 that includes an internally threaded portion 360b at one end for engaging the externally threaded portion of the annular recess 358b of the shoe 358. During operation of the assembly, the end of the seventh tubular support member 360 limits the longitudinal movement of the
15 expansion cone 318 in the direction of the shoe 358 by limiting the longitudinal movement of the sixth tubular support member 338. An annular centralizer 362 defining an internal passage 362 for supporting the valve member 348 is positioned within the seventh tubular support member 360 that includes axial passages 362b and 362c.

20 Referring to Figs. 19a-19b, during operation, the assembly 300 may be used to form or repair a wellbore casing by implementing a method 400 in which, as illustrated in Figs. 20a-20c, the assembly 300 may initially be positioned within a wellbore 1000 having a preexisting wellbore casing 1002 by coupling a conventional tubular member 1004 defining an internal passage 1004a to the
25 threaded portion 312b of the first tubular support member 312 in step 402. During placement of the assembly 300 within the wellbore 1000, fluidic materials 1006 within the wellbore 1000 below the assembly 300 are conveyed through the assembly 300 and into the passage 1004a by the fluid passages 356fa, 356fb, 352a, 348a, 346a, 344a, and 314a. In this manner, surge pressures that can be created
30 during placement of the assembly 300 within the wellbore 1000 are minimized. The




float valve element 354 is pre-set in an auto-fill configuration to permit the fluidic materials 1006 to pass through the conical passage 352a of the valve seat 352.

Referring to Figs. 21a-21c, in step 404, fluidic materials 1008 may then be injected into and through the tubular member 1004 and assembly 300 to thereby
5 ensure that all of the fluid passages 1004a, 314a, 344a, 346a, 348a, 352a, 356fa, and 356fb are functioning properly.

Referring to Figs. 22a-22c, in step 406, a bottom plug 1010 may then be injected into the fluidic materials 1008 and into the assembly 300 and then positioned in the throat passage 346aa of the valve member 346. In this manner, the
10 region of the passage 346a upstream from the plug 1010 may be fluidically isolated from the region of the passage 346a downstream from the plug 1010. The proper placement of the plug 1010 may be indicated by a corresponding increase in the operating pressure of the fluidic material 1008.

Referring to Figs. 23a-23c, in step 408, the sliding sleeve 342 may then be
15 displaced relative to the valve member 344 by displacing the tubular member 1004 by applying, for example, a downward force of approximately 2.224 kN (5,000 lbf) on the assembly 300. In this manner, the tubular member 1004, the first tubular support member 312, the second tubular support member 314, the third tubular support member 316, the expansion cone 318, the annular spacer 322, the fourth
20 tubular support member 324, the fifth tubular support member 326, the sixth tubular support member 338, the collet 340, and the sliding sleeve 342 are displaced in the longitudinal direction relative to the expansion cone launcher 320 and the valve member 344. In this manner, fluidic materials within the passage 344a upstream of the plug 1010 may bypass the plug by passing through the first passages, 344da and
25 344db, through the annular passage 342a, through the second passages, 344fa and 344fb, through the annular passage 350, through the passages, 346ca and 346cb, into the region of the passage 348a downstream from the plug. Furthermore, in this manner, the rupture disc 336 is fluidically isolated from the passages 314a and 344a.


Referring to Figs. 24a-24c, in step 410, a hardenable fluidic sealing material
30 1012 may then be injected into the assembly 300 and conveyed through the passages



1004a, 314a, 344a, 344da, 344db, 342a, 344fa, 344fb, 350, 346ca, 346cb, 348a, 352a, 356fa, and 356fb into the wellbore 1000. In this manner, a hardenable fluidic sealing material such as, for example, cement, may be injected into the annular region between the expansion cone launcher 320 and the wellbore 1000 in order to subsequently form an annular body of cement around the radially expanded expansion cone launcher 320. Furthermore, in this manner, the radial passage 330a and the rupture disc 336 are not exposed to the hardenable fluidic sealing material 1012.

Referring to Figs. 25a-25c, in step 412, upon the completion of the injection of the hardenable fluidic sealing material 1012, a nonhardenable fluidic material 1014 may be injected into the assembly 300, and a top plug 1016 may then be injected into the assembly 300 along with the fluidic materials 1014 and then positioned in the throat passage 344aa of the valve member 344. In this manner, the region of the passage 344a upstream from the top plug 1016 may be fluidically isolated from region downstream from the top plug. The proper placement of the plug 1016 may be indicated by a corresponding increase in the operating pressure of the fluidic material 1014.

Referring to Fig. 26a-26c, in step 414, the sliding sleeve 42 may then be displaced relative to the valve member 344 by displacing the tubular member 1004 by applying, for example, an upward force of approximately 57.827 kN (13,000 lbf) on the assembly 300. In this manner, the tubular member 1004, the first tubular support member 312, the second tubular support member 314, the third tubular support member 316, the expansion cone 318, the annular spacer 322, the fourth tubular support member 324, the fifth tubular support member 326, the sixth tubular support member 338, the collet 340, and the sliding sleeve 342 are displaced in the longitudinal direction relative to the expansion cone launcher 320 and the valve member 344. In this manner, fluidic materials within the passage 344a upstream of the bottom plug 1010 may no longer bypass the bottom plug by passing through the first passages, 344da and 344db, through the annular passage 342a, through the second passages, 344fa and 344fb, through the annular passage 350, and through the




passages, 346ca and 346cb, into region of the passage 348a downstream from the bottom plug. Furthermore, in this manner, the rupture disc 336 is no longer fluidically isolated from the fluid passages 314a and 344a.

Referring to Figs. 27a-27c, in step 416, the fluidic material 1014 may be injected into the assembly 300. The continued injection of the fluidic material 1014 may increase the operating pressure within the passages 314a and 344a until the burst disc 336 is opened thereby permitting the pressurized fluidic material 1014 to pass through the radial passage 330a and into an annular region 1018 defined by the second tubular support member 314, the third tubular support member 316, the sixth tubular support member 338, the collet 340, the sliding sleeve 342, the valve members, 344 and 348, the shoe 358, and the seventh tubular support member 360. The pressurized fluidic material 1014 within the annular region 1018 directly applies a longitudinal force upon the fifth tubular support member 326 and the sixth tubular support member 338. The longitudinal force in turn is applied to the expansion cone 318. In this manner, the expansion cone 318 is displaced relative to the expansion cone launcher 320 thereby radially expanding and plastically deforming the expansion cone launcher.

Alternatively, in the method 400, the injection and placement of the top plug 1016 into the liner hanger assembly 300 in step 412 may be omitted.

Alternatively, in the method 400, in step 402, the assembly 300 is positioned at the bottom of the wellbore 1000.

As illustrated in Figs. 28a-28b, during operation, the assembly 300 may be used to form or repair a wellbore casing by implementing a method 450 in which, as illustrated in Figs. 20a-20c, the assembly 300 may initially be positioned within a wellbore 1000 having a preexisting wellbore casing 1002 by coupling a conventional tubular member 1004 defining an internal passage 1004a to the threaded portion 312b of the first tubular support member 312 in step 452. During placement of the assembly 300 within the wellbore 1000, fluidic materials 1006 within the wellbore 1000 below the assembly 300 are conveyed through the assembly 300 and into the passage 1004a by the fluid passages 356fa, 356fb, 352a,




348a, 346a, 344a, and 314a. In this manner, surge pressures that can be created during placement of the assembly 300 within the wellbore 1000 are minimized. The float valve element 354 is pre-set in an auto-fill configuration to permit the fluidic materials 1006 to pass through the conical passage 352a of the valve seat 352.

5 Referring to Figs. 21a-21c, in step 454, in step 454, fluidic materials 1008 may then be injected into and through the tubular member 1004 and assembly 300 to thereby ensure that all of the fluid passages 1004a, 314a, 344a, 346a, 348a, 352a, 356fa, and 356fb are functioning properly.

10 Referring to Figs. 22a-22c, in step 456, the bottom plug 1010 may then be injected into the fluidic materials 1008 and into the assembly 300 and then positioned in the throat passage 346aa of the valve member 346. In this manner, the region of the passage 346a upstream from the plug 1010 may be fluidically isolated from the region of the passage 346a downstream from the plug 1010. The proper placement of the plug 1010 may be indicated by a corresponding increase in the
15 operating pressure of the fluidic material 1008.


Referring to Figs. 29a-29c, in step 458, the fluidic material 1014 may then be injected into the assembly 300 to thereby increase the operating pressure within the passages 314a and 344a until the burst disc 336 is opened thereby permitting the pressurized fluidic material 1014 to pass through the radial passage 330a and into an
20 annular region 1018 defined by the defined by the second tubular support member 314, the third tubular support member 316, the sixth tubular support member 338, the collet 340, the sliding sleeve 342, the valve members, 344 and 348, the shoe 358, and the seventh tubular support member 360. The pressurized fluidic material 1014 within the annular region 1018 directly applies a longitudinal force upon the fifth
25 tubular support member 326 and the sixth tubular support member 338. The longitudinal force in turn is applied to the expansion cone 318. In this manner, the expansion cone 318 is displaced relative to the expansion cone launcher 320 thereby disengaging the collet 340 and the sliding sleeve 342 and radially expanding and plastically deforming the expansion cone launcher. The radial expansion process in



step 458 is continued to a location below the overlap between the expansion cone launcher 320 and the preexisting wellbore casing 1002.

Referring to Figs. 30a-30c, in step 460, the sliding sleeve 342 may then be displaced relative to the valve member 344 by (1) displacing the expansion cone 318 in a downward direction using the tubular member 1004 and (2) applying, using the tubular member 1004 a downward force of, for example, approximately 2.224 kN (5,000 lbf) on the assembly 300. In this manner, the coupling 340b of the collet 340 reengages the external groove 342e of the sliding sleeve 342. Furthermore, in this manner, the tubular member 1004, the first tubular support member 312, the second tubular support member 314, the third tubular support member 316, the expansion cone 318, the annular spacer 322, the fourth tubular support member 324, the fifth tubular support member 326, the sixth tubular support member 338, the collet 340, and the sliding sleeve 342 are displaced in the longitudinal direction relative to the expansion cone launcher 320 and the valve member 344. In this manner, fluidic materials within the passage 344a upstream of the bottom plug 1010 may bypass the plug by passing through the passages, 344da and 344db, the annular passage 342a, the passages, 344fa and 344fb, the annular passage 350, and the passages, 346ca and 346cb, into the passage 348a downstream from the plug. Furthermore, in this manner, the fluid passage 330a is fluidically isolated from the passages 314a and 344a.


Referring to Figs. 31a-31c, in step 462, the hardenable fluidic sealing material 1012 may then be injected into the assembly 300 and conveyed through the passages 1004a, 314a, 344a, 344da, 344db, 342, 344fa, 344fb, 350, 346ca, 346cb, 348a, 352b, 356fa, and 356fb into the wellbore 1000. In this manner, a hardenable fluidic sealing material such as, for example, cement, may be injected into the annular region between the expansion cone launcher 320 and the wellbore 1000 in order to subsequently form an annular body of cement around the radially expanded expansion cone launcher 320. Furthermore, in this manner, the radial passage 330a and the rupture disc 336 are not exposed to the hardenable fluidic sealing material 1012.



Referring to Figs. 32a-32c, in step 464, upon the completion of the injection of the hardenable fluidic sealing material 1012, the nonhardenable fluidic material 1014 may be injected into the assembly 300, and the top plug 1016 may then be injected into the assembly 300 along with the fluidic materials 1014 and then positioned in the throat passage 344aa of the valve member 344. In this manner, the region of the passage 344a upstream from the top plug 1016 may be fluidically isolated from the region within the passage downstream from the top plug. The proper placement of the plug 1016 may be indicated by a corresponding increase in the operating pressure of the fluidic material 1014.

Referring to Figs. 33a-33c, in step 466, the sliding sleeve 342 may then be displaced relative to the valve member 344 by displacing the tubular member 1004 by applying, for example, an upward force of approximately 57.827 kN (13,000 lbf) on the assembly 300. In this manner, the tubular member 1004, the first tubular support member 312, the second tubular support member 314, the third tubular support member 316, the expansion cone 318, the annular spacer 322, the fourth tubular support member 324, the fifth tubular support member 326, the sixth tubular support member 338, the collet 340, and the sliding sleeve 342 are displaced in the longitudinal direction relative to the expansion cone launcher 320 and the valve member 344. In this manner, fluidic materials within the passage 344a upstream of the bottom plug 110 may no longer bypass the plug by passing through the passages, 344da and 344db, the annular passage 342a, the passages, 344fa and 344fb, the annular passage 350, and the passages, 346ca and 346cb, into the passage 348a downstream from the plug. Furthermore, in this manner, the passage 330a is no longer fluidically isolated from the fluid passages 314a and 344a.

Referring to Figs. 34a-34c, in step 468, the fluidic material 1014 may be injected into the assembly 300. The continued injection of the fluidic material 1014 may increase the operating pressure within the passages 314a, 330a, and 344a and the annular region 1018. The pressurized fluidic material 1014 within the annular region 1018 directly applies a longitudinal force upon the fifth tubular support member 326 and the sixth tubular support member 338. The longitudinal force in



turn is applied to the expansion cone 318. In this manner, the expansion cone 318 is displaced relative to the expansion cone launcher 320 thereby completing the radial expansion of the expansion cone launcher.

Alternatively, in the method 450, the injection and placement of the top plug 1016 into the liner hanger assembly 300 in step 464 may be omitted.

Alternatively, in the method 450, in step 452, the assembly 300 is positioned at the bottom of the wellbore 1000.


Alternatively, in the method 450: (1) in step 452, the assembly 300 is positioned proximate a position below a preexisting section of the wellbore casing 1002, and (2) in step 458, the expansion cone launcher 320, and any expandable tubulars coupled to the threaded portion 320c of the expansion cone launcher, are radially expanded and plastically deformed until the shoe 358 of the assembly 300 is proximate the bottom of the wellbore 1000. In this manner, the radial expansion process using the assembly 300 provides a telescoping of the radially expanded tubulars into the wellbore 1000.

The assembly 300 may be operated to form a wellbore casing by including or excluding the float valve 354.

The float valve 354 may be operated in an auto-fill configuration in which tabs are positioned between the float valve 354 and the valve seat 352. In this manner, fluidic materials within the wellbore 1000 may flow into the assembly 300 from below thereby decreasing surge pressures during placement of the assembly 300 within the wellbore 1000. Furthermore, pumping fluidic materials through the assembly 300 at rate of about 1.2 to 2 m³/min (6 to 8 bbl/min) will displace the tabs from the valve seat 352 and thereby allow the float valve 354 to close.

Prior to the placement of any of the plugs, 1010 and 1016, into the assembly 300, fluidic materials can be circulated through the assembly 300 and into the wellbore 1000.

Once the bottom plug 1010 has been positioned into the assembly 300, fluidic materials can only be circulated through the assembly 300 and into the wellbore 1000 if the sliding sleeve 342 is in the down position.



Once the sliding sleeve 342 is positioned in the down position, the passage 330a and rupture disc 336 are fluidically isolated from pressurized fluids within the assembly 300.

Once the top plug 1016 has been positioned into the assembly 300, no fluidic materials can be circulated through the assembly 300 and into the wellbore 1000.

The assembly 300 may be operated to form or repair a wellbore casing, a pipeline, or a structural support.

Although this detailed description has shown and described illustrative embodiments of the invention, this description contemplates a wide range of modifications, changes, and substitutions within the scope of the claims. In some instances, one may employ some features without a corresponding use of the other features and accordingly, it is appropriate that readers should construe the appended claims broadly .

CLAIMS

1. An apparatus for forming a wellbore casing within a borehole within a subterranean formation, comprising:

- 5 a first annular support member defining a first fluid passage and one or more first radial passages, each having one or more pressure sensitive valves fluidically coupled to the first fluid passage;
- an annular expansion cone coupled to the first annular support member;
- an expandable tubular member movably coupled to the expansion cone;
- 10 a second annular support member defining a second fluid passage coupled to the expandable tubular member;
- an annular valve member defining a third fluid passage fluidically coupled to the first and second fluid passages having first and second throat passages, defining second and third radial passages fluidically coupled to the third fluid passage, coupled to the second annular support member, and movably coupled to the first annular
- 15 support member; and
- an annular sleeve releasably coupled to the first annular support member and movably coupled to the annular valve member for controllably fluidically coupling the second and third radial passages; and
- wherein an annular region is defined by the region between the tubular
- 20 member and the first annular support member, the second annular support member, the annular valve member, and the annular sleeve.

2. A method of operating an apparatus for forming a wellbore casing within a borehole within a subterranean formation, the apparatus comprising:

- 25 a first annular support member defining a first fluid passage and one or more first radial passages, each of the one or more first radial passages having a pressure sensitive valve fluidically coupled to the first fluid passage;
- an annular expansion cone coupled to the first annular support member;
- an expandable tubular member movably coupled to the expansion cone;

a second annular support member defining a second fluid passage coupled to the expandable tubular member;

an annular valve member defining a third fluid passage fluidically coupled to the first and second fluid passages and having a top and a bottom throat passage,
5 defining second and third radial passages fluidically coupled to the third fluid passage, coupled to the second annular support member, and movably coupled to the first annular support member; and

an annular sleeve releasably coupled to the first annular support member and movably coupled to the annular valve member for controllably fluidically coupling the
10 second and third radial passages; and

wherein an annular region is defined by the region between the tubular member and the first annular support member, the second annular support member, the annular valve member, and the annular sleeve;

the method comprising:

15 positioning the apparatus within the borehole;

injecting fluidic materials into the first, second and third fluid passages;

positioning a bottom plug in the bottom throat passage;

displacing the annular sleeve to fluidically couple the second and third radial
passages;

20 injecting a hardenable fluidic sealing material through the first, second, and third fluid passages, and the second and third radial passages;

displacing the annular sleeve to fluidically decouple the second and third radial passages; and

25 injecting a non-hardenable fluidic material through the first fluid passage and the one or more first radial passages and pressure sensitive valves into the annular region to radially expand the expandable tubular member.

3. The method of claim 2, wherein positioning the apparatus within the borehole comprises:

positioning an end of the expandable tubular member adjacent to the bottom of the borehole.

4. The method of claim 2, further comprising: positioning a top plug in the top throat passage.

5. A method of operating an apparatus for forming a wellbore casing within a borehole within a subterranean formation, the apparatus comprising:

a first annular support member defining a first fluid passage and one or more first radial passages, each of the one or more first radial passages having a pressure sensitive valve fluidically coupled to the first fluid passage;

an annular expansion cone coupled to the first annular support member;

an expandable tubular member movably coupled to the expansion cone;

a second annular support member defining a second fluid passage coupled to the expandable tubular member;

an annular valve member defining a third fluid passage fluidically coupled to the first and second fluid passages having a top and a bottom throat passage, defining second and third radial passages fluidically coupled to the third fluid passage, coupled to the second annular support member, and movably coupled to the first annular support member; and

an annular sleeve releasably coupled to the first annular support member and movably coupled to the annular valve member for controllably fluidically coupling the second and third radial passages; and

wherein an annular region is defined by the region between the tubular member and the first annular support member, the second annular support member, the annular valve member, and the annular sleeve;

the method comprising:

positioning the apparatus within the borehole;

injecting fluidic materials into the first, second and third fluid passages;

positioning a bottom plug in the bottom throat passage;

injecting a non-hardenable fluidic material through the first fluid passages and the first radial passages and pressure sensitive valves into the annular region to radially expand a portion of the expandable tubular member;

5 displacing the annular sleeve to fluidicly couple the second and third radial passages;

injecting a hardenable fluidic sealing material through the first, second, and third fluid passages, and the second and third radial passages;

displacing the annular sleeve to fluidicly decouple the second and third radial passages; and

10 injecting a non-hardenable fluidic material through the first fluid passage and the one or more first radial passages and pressure sensitive valves into the annular region to radially expand another portion of the expandable tubular member.

6. The method of claim 5, wherein positioning the apparatus within the borehole
15 comprises:

positioning an end of the expandable tubular member adjacent to the bottom of the borehole.



20 7. The method of claim 5, wherein positioning the apparatus within the borehole comprises:



positioning an end of the expandable tubular member adjacent to a preexisting section of wellbore casing within the borehole.



25 8. The method of claim 5, wherein injecting a non-hardenable fluidic material into the first fluid passage and one or more first radial passages and pressure sensitive valves to radially expand a portion of the expandable tubular member comprises:

injecting a non-hardenable fluidic material into the first fluid passage and the one or more first radial passages and pressure sensitive valves to radially expand the

expandable tubular member until an end portion of the tubular member is positioned proximate the bottom of the borehole.

9. The method of claim 5, further comprising:

5 positioning a top plug in the top throat passage.

10. An apparatus for coupling an expandable tubular member to a preexisting structure, comprising:

10 a first annular support member defining a first fluid passage and one or more first radial passages, each of the one or more first radial passages having a pressure sensitive valve fluidically coupled to the first fluid passage;

an annular expansion cone coupled to the first annular support member;

a second annular support member defining a second fluid passage coupled to the expandable tubular member;

15 an annular valve member defining a third fluid passage fluidically coupled to the first and second fluid passages having first and second throat passages, defining second and third radial passages fluidically coupled to the third fluid passage, coupled to the second annular support member, and movably coupled to the first annular support member; and

20 an annular sleeve releasably coupled to the first annular support member and movably coupled to the annular valve member for controllably fluidically coupling the second and third radial passages; and

25 wherein an annular region is defined by the region between the tubular member and the first annular support member, the second annular support member, the annular valve member, and the annular sleeve.

11. A method of operating an apparatus for coupling an expandable tubular member to a preexisting structure, the apparatus comprising:

a first annular support member defining a first fluid passage and one or more first radial passages, each of the one or more first radial passages having a pressure sensitive valve fluidically coupled to the first fluid passage;

an annular expansion cone coupled to the first annular support member;

5 an expandable tubular member movably coupled to the expansion cone;

a second annular support member defining a second fluid passage coupled to the expandable tubular member;

an annular valve member defining a third fluid passage fluidically coupled to the first and second fluid passages having a top and a bottom throat passage, defining
10 second and third radial passages fluidically coupled to the third fluid passage, coupled to the second annular support member, and movably coupled to the first annular support member; and

an annular sleeve releasably coupled to the first annular support member and movably coupled to the annular valve member for controllably fluidically coupling the
15 second and third radial passages; and

wherein an annular region is defined by the region between the tubular member and the first annular support member, the second annular support member, the annular valve member, and the annular sleeve;

the method comprising:

20 positioning the apparatus within the preexisting structure;

injecting fluidic materials into the first, second and third fluid passages;

positioning a bottom plug in the bottom throat passage;

displacing the annular sleeve to fluidically couple the second and third radial passages;

25 injecting a hardenable fluidic sealing material through the first, second, and third fluid passages, and the second and third radial passages;

displacing the annular sleeve to fluidically decouple the second and third radial passages; and

wherein an annular region is defined by the region between the tubular member and the first annular support member, the second annular support member, the annular valve member, and the annular sleeve;

the method comprising:

- 5 positioning the apparatus within the preexisting structure;
injecting fluidic materials into the first, second and third fluid passages;
positioning a bottom plug in the bottom throat passage;
injecting a non-hardenable fluidic material through the first fluid passages and the first radial passages and pressure sensitive valves into the annular region to
10 radially expand a portion of the expandable tubular member;
displacing the annular sleeve to fluidically couple the second and third radial passages;
injecting a hardenable fluidic sealing material through the first, second, and third fluid passages, and the second and third radial passages;
15 displacing the annular sleeve to fluidically decouple the second and third radial passages; and
injecting a non-hardenable fluidic material through the first fluid passage and the one or more first radial passages and pressure sensitive valves into the annular region to radially expand another portion of the expandable tubular member.



20



15. The method of claim 14, wherein positioning the apparatus within the preexisting structure comprises:

positioning an end of the expandable tubular member adjacent to the bottom of the preexisting structure.



25

16. The method of claim 14, wherein positioning the apparatus within the preexisting structure comprises:

positioning an end of the expandable tubular member adjacent to a preexisting section of a structural element within the preexisting structure.

30

17. The method of claim 14, wherein injecting a non-hardenable fluidic material into the first fluid passage and one or more first radial passages and pressure sensitive valves to radially expand a portion of the expandable tubular member comprises:

5 injecting a non-hardenable fluidic material into the first fluid passage and one or more first radial passages and pressure sensitive valves to radially expand the expandable tubular member until an end portion of the tubular member is positioned proximate the bottom of the preexisting structure.

10 18. The method of claim 14, further comprising positioning a top plug in the top throat passage.



**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

☒ **BLACK BORDERS**

☒ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**

☐ **FADED TEXT OR DRAWING**

☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**

☐ **SKEWED/SLANTED IMAGES**

☒ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**

☒ **GRAY SCALE DOCUMENTS**

☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**

☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**

☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.